

SHANDONG
LINGLONG TIRE
CO.,LTD.

2020 TIRE CATALOGUE

PCR TIRE
TBR TIRE
SPECIALTY TIRE



A scenic view of a winding asphalt road on a rocky coastline. The road is flanked by low stone walls and curves along the edge of a cliff. In the background, there are rolling hills and a sea under a clear sky. The text "THE WORLD AT YOUR REACH" is overlaid on the right side of the image.

**THE WORLD AT
YOUR REACH**



P/006
**COMPANY
INTRODUCTION**

P/008
SPORTS EVENTS

P/012
**DISPLAY OF LINGLONG'S
STRENGTH**

P/014
GLOBAL STRATEGIC LAYOUT

CONTENTS


PCR TIRE

TBR TIRE

SPECIALTY TIRE

COMPANY INTRODUCTION

Shandong Linglong Tire Co., Ltd. is a specialized and large-scale technology-oriented tire manufacturer with leading products like high performance passenger car radial (PCR) tires, light truck radial (LTR) tires, tens of thousands of all-steel radial truck and bus radial (TBR) tire specifications. Linglong has been consistently among the top 20 tire companies in the world and top 5 in China for several years.

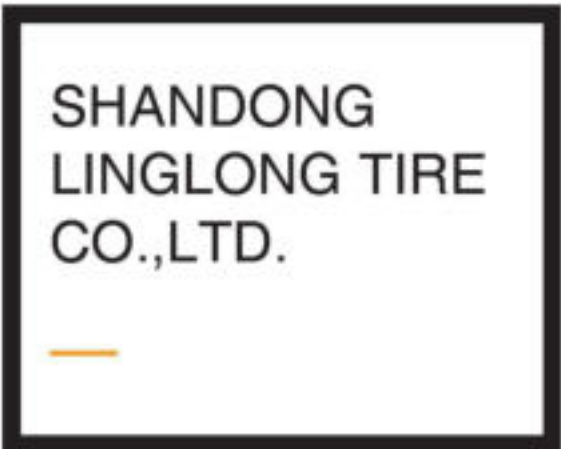

SHANDONG
LINGLONG TIRE
CO.,LTD.

Linglong brand has been consistently on the list of "Top 500 Most Valuable Brands in China" for many years. The brand value of 2019 has amounted to RMB 25.328 billion, maintaining its first position in China tire industry. The focus in promoting medium and premium tires has enable Linglong, the first self-owned tire brand in China, to be the first domestic tire company to gain entry into the OE market, i.e. the global network of world's top automobile brands such as GM, Ford. Besides, Linglong is the main supplier and excellent supplier of over 50 domestic OE customers including China FAW, Shanxi Automobile, Dongfeng Motor and Foton.

Top 500
Most Valuable
Brands in China

Linglong has established R&D centers at Zhaoyuan, Beijing and North America and set up a representative office for testing in Europe. Linglong owns the national enterprise technology center and testing laboratory recognized nationally. Linglong self-developed "low profile, wet-skid resistance, low noise and ultra-high performance passenger car radial tire" and was awarded "Second National Prize for Progress in Science and Technology". Besides, Linglong Tire is awarded "Second National Prize of Invention" from "the key technology of designing and manufacturing for fuel-efficient tire rubber nano-composites with high performance", which is the first national award for invention in tire industry of China.

3+3 STRATEGY

The company vigorously implements the strategy of internationalization and develops the "3+3 strategy", which includes the parallel development of three domestic manufacturing bases in Zhaoyuan, Dezhou and Liuzhou. The plant in Thailand is taken as the starting point of globalization strategy so as to form three overseas manufacturing bases. In Feb. 2014, the phase I project of Thailand plant was put into production, marking the major breakthrough of internationalization and laying a solid foundation for the implementation of global development strategy. On July 26, 2015, the phase II project of TBR tire in Thailand was put into production.



In the future, Linglong will continue with the goal to be "among the world's top 10 tire manufacturers and in building a world-class tire company". The company will strive to reach an annual sales volume of 90 million by 2020. Hence, in becoming a globally competitive and world-class tire company to steadily step into the top 10 position in the world tire industry.



**SPORTS
EVENTS**

|



Sponsor the VfL Wolfsburg



Strategic Tire Partner of the Cleveland Cavaliers



Sponsor China Truck Racing Championship



Sponsor China Super Truck Racing

Sponsor the Ratchaburi
Mitr Phol FC



Official Tire of
Shakedown of China
Grand Rally



Main Sponsor of German
Women's Handball Team
SVG Celle





Sponsor Zimbabwe Cricket



Found the First Women
Racing Team in China



Sponsor China Grand Rally





DISPLAY OF LINGLONG'S STRENGTH

Linglong invests in the construction
of Sino-Asia Tire Proving Ground



I



OEMs



GLOBAL STRATEGIC LAYOUT

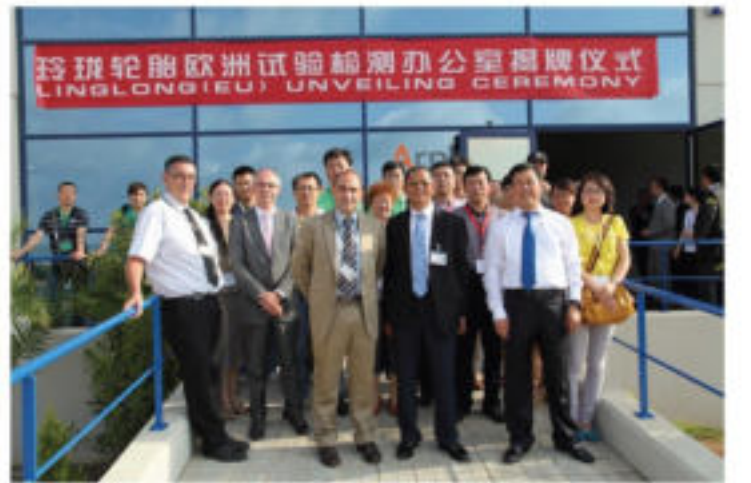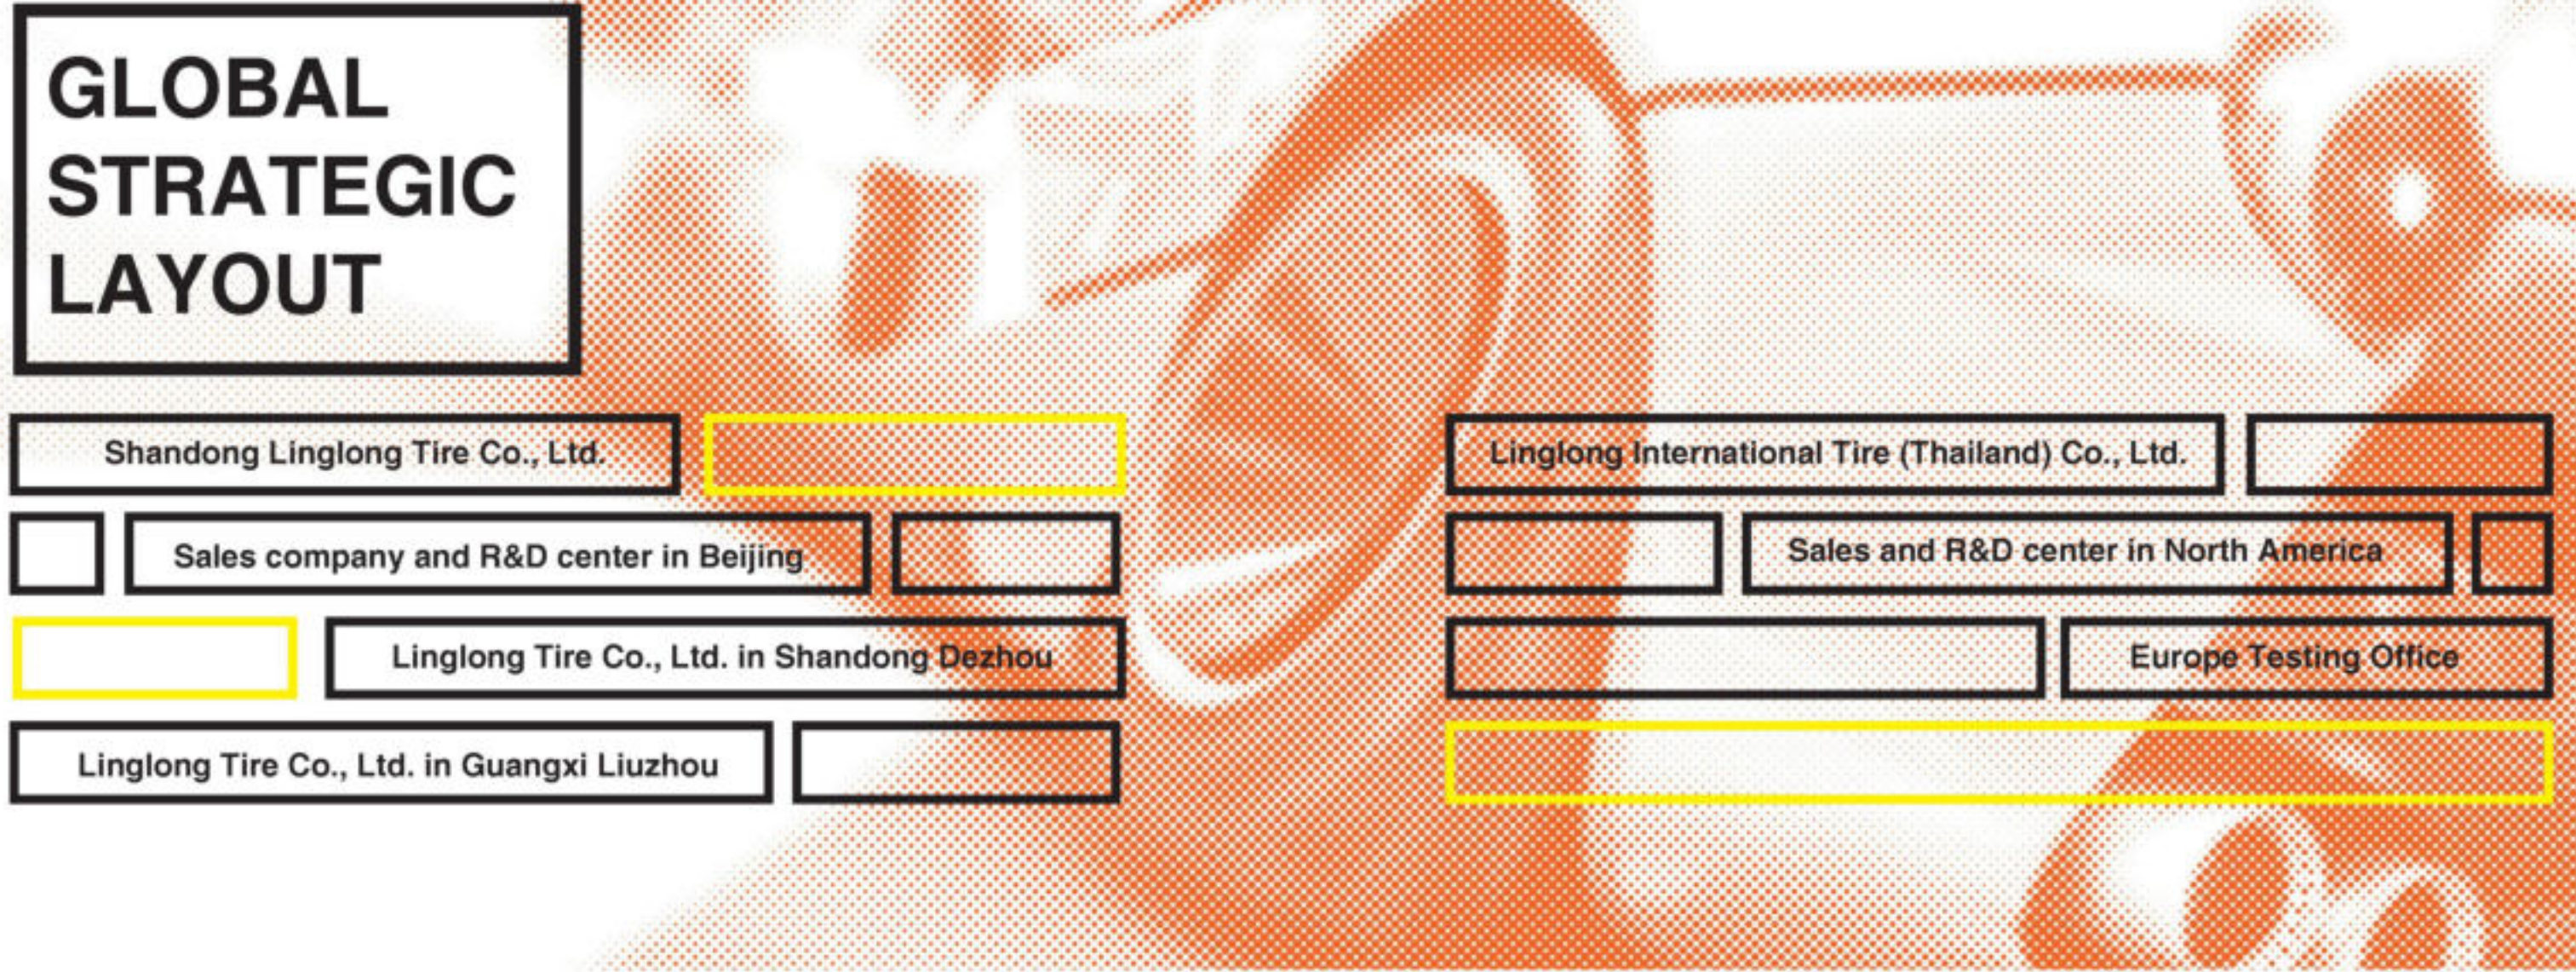

An aerial photograph of a rugged mountain valley. A winding asphalt road curves through the landscape, which is covered in green and yellow vegetation with patches of red. In the distance, several lakes are visible, and the sky is filled with dramatic, cloudy light. The overall scene is a scenic, high-altitude landscape.

PCR TIRE
—

A photograph of a line of cars in traffic at night. The lead car is a dark-colored sedan with its headlights on. The background shows other cars and city lights, all slightly out of focus. A white text box is overlaid on the left side of the image, containing the text 'Passenger Car Tire' and a small white square icon to its right.

Passenger Car Tire





GREEN-Max All Season

New

All Season Tire

1. Excellent handling;
2. Lower rolling resistance;
3. All season tire which is applicable to different weather and road conditions.

Rim Diameter in	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
13	155/70R13	75	T	4.50B	387	250	548	157	7.0
	155/80R13	79	T	4.50B	437	240	578	157	7.0
	165/70R13	79	T	5.00B	437	250	562	170	7.0
	175/70R13	82	T	5.00B	475	250	576	177	7.0
14	155/65R14	75	T	4 1/2J	387	250	558	157	7.0
	165/65R14	79	T	5J	437	250	570	170	7.0
	165/70R14	81	T	5J	462	250	588	170	7.0
	175/65R14	82	T	5J	475	250	584	177	7.0
	175/70R14 XL	88	T	5J	560	290	602	177	7.0
	185/60R14	82	H	5 1/2J	475	250	578	189	7.0
15	185/55R15	82	H	6J	475	250	585	194	7.0
	185/60R15 XL	88	H	5 1/2J	560	290	603	189	7.0
	185/65R15	88	H	5 1/2J	560	250	621	189	7.0
	195/55R15	85	H	6J	515	250	595	201	7.0
	195/60R15	88	H	6J	560	250	615	201	7.0
	195/65R15	91	H	6J	615	250	635	201	7.0
16	195/55R16	87	H	6J	545	250	620	201	7.0
	205/55R16	91	V	6 1/2J	615	250	632	214	7.0
	205/60R16 XL	96	H	6J	710	290	652	209	7.0
	215/55R16 XL	97	V	7J	730	290	642	228	7.0
17	225/45R17 XL	94	V	7 1/2J	670	290	634	225	7.0



GREEN-Max

UHP Tire with Excellent Wet Grip and Low Noise

1. Excellent handling performance;
2. Improved drainage performance to effectively reduce risk of hydroplaning;
3. Superior driving stability;
4. Comfortable ride;
5. Designed to fit premium cars and sports cars.

Rim Diameter (in.)	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
16	195/45R16 XL	84	V	6 1/2J	500	290	582	195	7.8
	205/45R16 XL	87	W	7J	545	290	590	206	7.8
	205/50R16	87	W	6 1/2J	545	250	612	214	7.8
	205/50R16	87	V	6 1/2J	545	250	612	214	7.8
	205/55R16 XL	94	W	6 1/2J	670	290	632	214	7.8
	215/40R16 XL	86	W	7 1/2J	530	290	578	218	7.8
	215/45R16 XL	90	V	7J	600	290	600	213	7.5
	215/55R16 XL	97	W	7J	730	290	642	226	7.8
	225/50R16 XL	96	V	7J	710	290	632	233	7.8
	225/55R16	95	V	7J	690	250	654	233	7.8
17	205/40R17 XL	84	W	7 1/2J	500	290	596	212	7.8
	205/45R17 XL	88	W	7J	560	290	616	206	7.8
	205/45R17 XL	88	V	7J	560	290	616	206	7.8
	205/50R17 XL	93	W	6 1/2J	650	290	638	214	7.8
	215/40R17 XL	87	W	7 1/2J	545	290	604	218	7.8
	215/45R17 XL	91	W	7J	615	290	626	213	7.8
	215/50R17 XL	95	V	7J	690	290	648	226	7.8
	215/50R17 XL	95	W	7J	690	290	648	226	7.8
	215/55R17	94	V	7J	670	250	668	226	7.8
	215/55R17 XL	98	W	7J	750	290	668	226	7.8
	225/45R17 XL	94	W	7 1/2J	670	290	634	225	7.8
	225/50R17 XL	98	W	7J	750	290	658	233	7.8
	225/55R17	97	W	7J	730	250	680	233	7.8
	225/55R17 XL	101	W	7J	825	290	680	233	7.8
	235/45ZR17 XL	97	W	8J	730	290	644	236	7.8
	235/50R17	96	Y	7 1/2J	710	250	668	245	7.8
	245/40R17	91	W	8 1/2J	615	250	628	248	7.8
	245/45R17 XL	99	W	8J	775	290	652	243	7.8

Rim Diameter (in.)	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
18	215/35R18 XL	84	W	7 1/2J	500	290	607	218	7.8
	215/40R18 XL	89	W	7 1/2J	580	290	629	218	7.8
	215/45R18 XL	93	W	7J	650	290	651	213	7.8
	225/40R18 XL	92	W	8J	630	290	637	230	7.8
	225/45R18 XL	95	W	7 1/2J	690	290	659	225	7.8
	235/40R18 XL	95	W	8 1/2J	690	290	645	241	7.8
	235/45R18 XL	98	Y	8J	750	290	669	236	7.5
	235/50R18 XL	101	W	7 1/2J	825	290	693	245	7.8
	245/40R18 XL	97	W	8 1/2J	730	290	653	248	7.8
	245/45R18 XL	100	W	8J	800	290	677	243	7.8
	255/45R18 XL	103	W	8 1/2J	875	290	687	255	7.8
	265/35R18 XL	97	Y	9 1/2J	730	290	643	271	7.8
19	225/35R19 XL	88	W	8J	560	290	641	230	7.8
	225/45R19 XL	96	W	7 1/2J	710	290	686	225	7.8
	235/35R19 XL	91	W	8 1/2J	615	290	647	241	7.8
	245/45R19	98	Y	8J	750	250	703	243	7.8
	265/30R19 XL	93	W	9 1/2J	650	290	643	271	7.8
20	225/35R20 XL	90	Y	8J	600	290	666	230	7.8
	235/30R20 XL	88	Y	8 1/2J	560	290	650	242	7.8



GREEN-Max HP⁰¹⁰

HP Tire with Good Handling Performance and Low Noise

1. Comfortable and quiet ride;
2. Low rolling resistance for better fuel efficiency;
3. Enhanced wet grip to effectively reduce risk of hydroplaning.

Rim Diameter (in)	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
14	165/60R14	75	H	5J	387	250	554	170	7.3
	175/65R14	82	H	5J	475	250	584	177	7.3
	175/65R14 XL	86	H	5J	530	290	584	177	7.3
	185/55R14	80	H	6J	450	250	560	194	7.7
	185/60R14	82	H	5 1/2J	475	250	578	189	7.7
	185/65R14	86	H	5 1/2J	530	250	596	189	7.8
15	165/60R15	73	V	5J	365	250	547	170	7.4
	165/55R15	75	V	5J	387	250	563	170	7.3
	165/60R15	77	H	5J	412	250	579	170	7.3
	175/60R15	81	H	5J	462	250	591	177	7.3
	175/65R15	84	H	5J	500	250	609	177	7.3
	185/55R15	82	V	6J	475	250	585	194	7.7
	185/60R15	84	H	5 1/2J	500	250	603	189	7.7
	185/60R15 XL	88	H	5 1/2J	560	290	603	189	7.7
	185/65R15	88	H	5 1/2J	580	250	621	189	7.8
	195/50R15	82	V	6J	475	250	577	201	7.8
	195/55R15	85	V	6J	515	250	595	201	7.8
	195/60R15	88	H/V	6J	580	250	615	201	7.8
	195/65R15	91	H/V	6J	615	250	635	201	7.8
	195/65R15 WW	91	H	6J	615	250	635	201	7.8
	205/60R15	91	H/V	6J	615	250	627	209	7.8
	205/65R15	94	H/V	6J	670	250	647	209	7.8
	215/65R15 XL	100	H	6 1/2J	800	290	661	221	7.8

Rim Diameter (in)	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
16	165/45R16 XL	74	V	5 1/2J	375	290	554	165	7.4
	185/50R16	81	H	6J	462	250	592	194	7.5
	195/50R16 XL	88	V	6J	560	290	602	201	7.5
	195/55R16	87	V	6J	545	250	620	201	7.5
	195/55R16 XL	91	H	6J	615	290	620	201	7.7
	195/60R16	89	H	6J	580	250	640	201	7.8
	205/50R16	87	V	6 1/2J	545	250	612	214	7.8
	205/55R16	91	H/V	6 1/2J	615	250	632	214	7.8
	205/60R16	92	H/V	6J	630	250	652	209	7.8
	205/65R16	95	H	6J	690	250	672	209	7.8
	215/60R16	95	H	6 1/2J	690	250	664	221	7.8
	215/60R16 XL	99	H/V	6 1/2J	775	290	664	221	7.7
	225/65R16	100	H	6 1/2J	800	250	698	228	8.6
	225/70R16	103	H	6 1/2J	875	250	722	228	8.6
	235/65R16	103	H	7J	875	250	712	240	8.2
17	165/40R17 XL	75	V	6J	387	290	564	170	7.4
	205/55R17 XL	95	V	6 1/2J	690	290	658	214	7.5
	215/60R17	96	H	6 1/2J	710	250	690	221	7.8
	225/65R17	102	H	6 1/2J	850	250	724	228	8.6



GREEN-Max EcoTouring

Eco-friendly Tire

1. Low resistance;
2. Low noise;
3. Excellent wet performance.

Rim Diameter (in)	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
12	145/70R12	69	S	4.50B	325	250	509	150	6.2
	155/70R12	73	S	4.50B	365	250	523	157	7.5
13	145/70R13	71	T	4.50B	345	250	534	150	7.3
	145/80R13	75	T	4.00B	387	240	562	145	7.1
	155/65R13	73	T	4.50B	365	250	532	157	7.3
	155/70R13	75	T	4.50B	387	250	548	157	7.3
	155/80R13	79	T	4.50B	435	240	578	157	7.3
	165/65R13	77	T	5.00B	412	250	544	170	7.3
	165/70R13	79	T	5.00B	435	250	562	170	7.3
	175/60R13	77	H	5.00B	412	250	540	177	7.3
	175/60R13	77	T	5.00B	412	250	540	177	7.3
	175/65R13	80	T	5.00B	450	250	558	177	7.3
	175/70R13	82	T	5.00B	475	250	576	177	7.3
14	155/65R14	75	T	4 1/2J	387	250	558	157	7.3
	165/65R14	79	T	5J	435	250	570	170	7.3
	165/70R14	81	T	5J	462	250	588	170	7.3
	175/65R14	82	T	5J	475	250	584	177	7.3
	175/65R14 XL	86	T	5J	530	290	584	177	7.3
	175/70R14	84	T	5J	500	250	602	177	7.3
	185/65R14	86	T	5 1/2J	530	250	596	189	7.5
	185/70R14	88	T	5 1/2J	580	250	616	189	7.7
	195/70R14	91	T	6J	615	250	630	201	7.3
	205/60R14	88	H	6J	560	250	602	209	7.7
15	185/65R15	88	T	5 1/2J	560	250	621	189	7.7
	185/65R15 XL	92	T	5 1/2J	630	290	621	189	7.7
	195/65R15	91	T	6J	615	250	635	201	7.7
	195/65R15 XL	95	T	6J	690	290	635	201	7.7
	205/70R15	96	T	6J	710	250	669	209	7.7
	235/75R15	105	T	6 1/2J	925	250	733	235	7.9



Taxi Tire

CROSSWIND R791

High Wear Resistance and Good Handling

1. High wear resistance;
2. Quiet and comfort;
3. Specially designed for taxis.

Rim Diameter (in)	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
13	165/80R13	83	S	4.50B	485	240	594	165	7.7
14	185/80R14	82	H	5 1/2J	475	250	578	189	8.3
	195/80R14	86	H	6J	530	250	590	201	8.5
15	195/80R15	88	H	6J	560	250	615	201	8.3
	195/85R15	91	H	6J	615	250	635	201	8.3
16	205/55R16	91	H	6 1/2J	615	250	632	214	8.1



LL700

Good drainage low noise

1. Excellent wet handling performance;
2. Good driving stability;
3. Improved wear resistance.

Rim Diameter (in)	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
13	155/70R13	75	S	4.50B	387	250	548	157	8.1
	175/70R13	82	T	5.00B	475	250	576	177	7.4
	185/70R13	86	T	5.50B	530	250	590	189	7.6
14	175/70R14	84	T	5J	500	250	602	177	7.4
	185/70R14	88	T	5 1/2J	560	250	616	189	7.6
	195/70R14	91	T	6J	615	250	630	201	8.0
	205/70R14 XL	95	T	6J	690	290	644	209	8.0
	215/70R14	96	T	6 1/2J	710	250	658	221	8.0
15	205/70R15	96	H	6J	710	250	669	209	8.0
	215/70R15	98	T	6 1/2J	750	250	683	221	8.0



CrossWind

Ultra High Performance

1. Directional tread pattern design;
2. Excellent handling performance;
3. Low noise.

Rim Diameter (in)	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
15	195/50R15	82	V	6J	475	250	577	201	7.7
	195/55R15	85	H	6J	515	250	595	201	7.7
16	195/45R16 XL	84	V	6 1/2J	500	290	582	195	7.8
	205/45R16 XL	87	W	7J	545	290	590	206	7.8
	205/50R16	87	V/W	6 1/2J	545	250	612	214	7.8
	205/55R16 XL	94	W	6 1/2J	670	290	632	214	7.8
	215/40R16 XL	86	W	7 1/2J	530	290	578	218	7.8
	215/55R16 XL	97	W	7J	730	290	642	226	7.8
17	225/50R16 XL	96	V	7J	710	290	632	233	7.8
	205/40R17 XL	84	W	7 1/2J	500	290	596	212	7.8
	205/45R17 XL	88	W	7J	560	290	616	206	7.8
	205/50R17 XL	93	W	6 1/2J	650	290	638	214	7.8
	215/40R17 XL	87	W	7 1/2J	545	290	604	218	7.8
	215/45R17 XL	91	W	7J	615	290	626	213	7.8
	215/50R17	91	V	7J	615	250	648	226	7.7
	215/50R17 XL	95	W	7J	690	290	648	226	7.7
	215/55R17 XL	98	W	7J	750	290	668	226	7.8
	225/45R17 XL	94	W	7 1/2J	670	290	634	225	7.8
	225/50R17 XL	98	W	7J	750	290	658	233	7.8
	225/55R17 XL	101	W	7J	690	240	690	233	7.7
	235/45R17 XL	97	W	8J	730	290	644	236	7.8
235/55R17 XL	103	W	7 1/2J	875	290	690	245	7.7	
245/45R17 XL	99	W	8J	775	290	652	243	7.8	

Rim Diameter (in.)	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
18	215/35R18 XL	84	W	7 1/2J	500	290	607	218	7.8
	225/40R18 XL	92	W	8J	630	290	637	230	7.8
	225/45R18 XL	95	W	7 1/2J	690	290	659	225	7.8
	235/40R18 XL	95	W	8 1/2J	690	290	645	241	7.8
	235/45R18	94	W	8J	670	250	669	236	7.7
	235/50R18 XL	101	W	7 1/2J	825	290	693	245	7.8
	245/40R18 XL	97	W	8 1/2J	730	290	653	248	7.8
	245/45R18 XL	100	W	8J	800	290	677	243	7.8
	255/45R18 XL	103	W	8 1/2J	875	290	687	255	7.8
	265/35R18 XL	97	H	9 1/2J	730	290	643	271	7.7
	265/60R18 XL	114	H	8J	1180	290	775	272	8.2
	225/50R18	95	V	7J	690	250	683	233	7.8
19	225/35R19 XL	88	W	8J	560	290	641	230	7.8
	235/35R19 XL	91	W	8 1/2J	615	290	647	241	7.8
	235/55R19 XL	105	W	7 1/2J	925	290	741	245	7.7
	245/40R19 XL	98	W	8 1/2J	750	290	679	248	7.7
	255/35R19 XL	96	W	9J	710	290	661	260	7.7
	265/30R19 XL	93	W	9 1/2J	650	290	643	271	7.8
20	235/30R20 XL	88	Y	8 1/2J	560	290	650	242	7.8
	235/45R20 XL	100	W	8J	800	290	720	236	7.8
	255/35R20	97	W	9J	730	290	686	260	7.8
	255/35R20	104	W	9J	900	250	746	266	7.8
	265/50R20 XL	111	V	8 1/2J	1090	290	774	277	8.2
	275/40R20 XL	106	W	9 1/2J	950	290	728	278	8.3
	275/45R20 XL	110	V	9J	1060	290	756	273	8.3
	275/50R20 XL	113	W	8 1/2J	1150	290	784	284	8.5
	275/55R20 XL	117	W	8 1/2J	1285	290	810	284	8.5
	245/50R20	102	V	7 1/2J	850	250	754	253	7.8



CrossWind HP⁰¹⁰

HP Tire with Excellent Handling Performance,
High mileage and Low noise

1. Comfortable and quiet ride;
2. Excellent handling performance;
3. Enhanced wet grip to effectively reduce risk of hydroplaning.

Rim Diameter (in)	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
14	165/55R14	72	V	5J	355	250	536	170	7.4
	185/60R14	82	H	5 1/2J	475	250	578	189	7.7
	185/70R14	88	H	5 1/2J	560	250	616	189	7.7
	195/70R14	91	H	6J	615	250	630	201	7.7
15	185/60R15	84	H	5 1/2J	500	250	603	189	7.7
	185/65R15	88	H	5 1/2J	560	250	621	189	7.7
	195/50R15	82	V	6J	475	250	577	201	7.7
	195/55R15	85	V	6J	515	250	595	201	7.7
	195/60R15	88	H	6J	560	250	615	201	7.7
	195/65R15	91	H	6J	615	250	635	201	7.7
	205/60R15	91	H	6J	615	250	627	209	7.7
	205/65R15	94	H	6J	670	250	647	209	7.7
	215/60R15	94	H	6 1/2J	670	250	639	221	7.7
	215/65R15	96	H	6 1/2J	710	250	661	221	7.7
	215/65R15 XL	100	H	6 1/2J	800	290	661	221	7.7
	255/70R15	108	S	7 1/2J	1000	250	739	260	9.1

Rim Diameter (in)	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
16	185/55R16	83	V	6J	487	250	610	194	7.7
	185/55R16	93	H	6J	650	290	640	201	7.2
	205/55R16	91	H	6 1/2J	615	250	632	214	7.7
	205/60R16	92	H	6J	630	250	652	209	7.7
	205/60R16	92	V	6J	630	250	652	209	7.7
	205/60R16 XL	96	H	6J	710	290	652	209	7.7
	215/55R16	93	H	7J	650	250	642	226	7.7
	215/60R16	95	H	6 1/2J	690	250	664	221	7.7
	215/65R16	98	H	6 1/2J	750	250	686	221	7.7
	225/55R16	95	V	7J	690	250	654	233	7.7
	225/60R16	98	H	6 1/2J	750	250	676	228	8.5
	225/65R16	100	H	6 1/2J	800	250	698	228	8.5
	225/70R16	103	H	6 1/2J	875	250	722	228	8.5
	235/60R16	100	H	7J	800	250	688	240	8.5
17	215/55R17	94	V	7J	670	250	668	226	7.7
	215/60R17	96	H	6 1/2J	710	250	690	221	7.7
	215/65R17	99	H	6 1/2J	775	250	712	221	7.7
	225/55R17	97	H	7J	730	250	680	233	8.5
	225/60R17	99	H	6 1/2J	775	250	702	228	8.5
	225/65R17	102	H	6 1/2J	850	250	724	228	8.5
	235/55R17	99	H	7 1/2J	775	250	690	245	8.5
	235/60R17	102	H	7J	850	250	714	240	8.5
	235/65R17	104	H	7J	900	250	738	240	8.5
18	225/55R18	98	H	7J	750	250	705	233	8.5
	235/65R18	106	H	7J	950	250	763	240	8.5



CrossWind EcoTouring

Super Wear Resistance

1. Ultra mileage tire;
2. Low noise;
3. Improved water evacuation.

Rim Diameter (in)	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
12	175/70R12	80	H	5.00B	450	250	551	177	7.7
13	165/60R13	73	T	5.00B	365	250	528	170	7.7
	175/70R13	82	T	5.00B	475	250	576	177	7.7
	185/70R13	86	T	5.50B	530	250	590	189	7.7
14	175/65R14	82	T	5J	475	250	584	177	7.7
	185/65R14	86	T	5 1/2J	530	250	596	189	7.7
	185/70R14	88	T	5 1/2J	560	250	616	189	7.7
	195/70R14	91	T	6J	615	250	630	201	7.7
15	185/65R15	88	T	5 1/2J	560	250	621	189	7.7
	195/50R15	82	H	6J	475	250	577	201	8.5
	195/60R15	88	H	6J	580	250	615	201	8.5
	195/65R15	91	H	6J	615	250	635	201	8.5
	205/60R15	91	H	6J	615	250	627	209	8.5
	205/65R15	94	H	6J	670	250	647	209	8.5
	205/70R15	96	T	6J	710	250	669	209	8.5
	205/75R15	97	S	5 1/2J	730	250	669	203	8.5
	215/70R15	98	T	6 1/2J	750	250	683	221	8.5
	215/75R15	100	S	6J	800	250	703	216	8.5
	225/70R15	100	T	6 1/2J	800	250	697	228	8.7
	225/75R15	102	S	6J	850	250	719	223	8.7
	235/75R15	105	S	6 1/2J	925	250	733	235	8.7

Rim Diameter (in)	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
16	205/55R16	91	H	6 1/2J	615	250	632	214	8.7
	205/60R16	92	H	6J	630	250	652	209	8.7
	205/65R16	95	H	6J	690	250	672	209	8.5
	215/60R16	95	H	6 1/2J	690	250	664	221	8.7
	215/65R16	98	H	6 1/2J	750	250	686	221	8.7
	215/70R16	100	T	6 1/2J	800	250	708	221	8.7
	225/60R16	98	H	6 1/2J	750	250	676	228	8.7
	225/65R16	100	H	6 1/2J	800	250	698	228	8.7
	225/70R16 XL	107	H	6 1/2J	975	290	722	228	8.7
	235/70R16	106	H	7J	950	250	736	240	8.7
	245/70R16	107	H	7J	975	250	750	248	8.7
	245/75R16	111	H	7J	1090	250	774	248	8.7
	255/70R16	111	S	7 1/2J	1090	250	764	260	8.7
	265/70R16	112	S	8J	1120	250	778	272	8.7
	265/75R16	116	H	7 1/2J	1250	250	804	267	8.7



L688

Ultra High Performance Tire

Strong grip with good steering performance.

Rim Diameter (in)	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
16	205/50ZR16 XL	91	W	6 1/2J	615	290	612	214	7.9
	205/55ZR16 XL	94	W	6 1/2J	670	290	632	214	7.9
	215/55ZR16 XL	97	W	7J	730	290	642	226	7.9
	225/50ZR16	92	W	7J	630	250	632	233	7.9
17	205/40ZR17 XL	84	W	7 1/2J	500	290	596	212	7.9
	205/50ZR17 XL	93	W	6 1/2J	650	290	638	214	7.9
	215/40ZR17 XL	87	W	7 1/2J	545	290	604	218	7.9
	215/45ZR17 XL	91	W	7J	615	290	626	213	7.9
	225/45ZR17 XL	94	W	7 1/2J	670	290	634	225	7.9
	235/45R17 XL	97	W	8J	730	290	644	236	7.9
	245/45ZR17	95	W	8J	690	250	652	243	7.9
18	215/35ZR18 XL	84	Y	7 1/2J	500	290	607	218	7.9
	215/40ZR18 XL	89	W	7 1/2J	580	290	629	218	7.9
	225/40ZR18 XL	92	W	8J	630	290	637	230	7.9
	235/40ZR18 XL	95	W	8 1/2J	690	290	645	241	7.9
	235/50ZR18	97	W	7 1/2J	730	250	693	245	7.9
	245/40ZR18 XL	97	W	8 1/2J	730	290	653	248	7.9
	245/45ZR18 XL	100	W	8J	800	290	677	243	7.9
	255/45ZR18 XL	103	W	8 1/2J	875	290	687	255	7.9
	265/35ZR18 XL	97	Y	9 1/2J	730	290	643	271	7.9
19	245/35ZR19 XL	93	Y	8 1/2J	650	290	655	248	7.9
20	225/30ZR20 XL	85	Y	8J	515	290	644	230	7.9
	225/35ZR20 XL	90	Y	8J	600	290	666	230	7.9
	245/35ZR20 XL	95	Y	8 1/2J	690	290	680	248	7.9
	255/35ZR20 XL	97	Y	9J	730	290	686	260	7.9



L689

Ultra High Performance Tire

1. Excellent high speed performance and strong grip;
2. Solid shoulder design to provide superior steering performance.

Rim Diameter in	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
20	275/30R20 XL	97	W	9 1/2J	730	290	674	278	8.5
	275/40R20 XL	106	V	9 1/2J	950	290	728	278	8.5
	275/45R20 XL	110	V	9J	1060	290	756	273	8.5
	275/55R20 XL	117	V	8 1/2J	1285	290	810	284	8.5
	285/30R20 XL	99	W	10J	775	290	680	290	8.5
	285/50R20 XL	116	V	9J	1250	290	794	297	8.5
22	255/30R22 XL	95	W	9J	690	290	713	260	8.5
	265/35R22 XL	102	V	9 1/2J	850	290	745	271	8.5
	305/40R22 XL	114	V	11J	1180	290	803	313	8.5
	305/45R22 XL	118	V	10J	1320	290	833	303	8.5
24	255/30R24 XL	97	W	9J	730	290	764	260	8.5
	275/25R24 XL	95	W	10J	690	290	748	283	8.5
	305/35R24 XL	112	V	11J	1120	290	824	313	8.5
26	295/30R26 XL	107	W	10 1/2J	975	290	838	301	8.5
	305/30R26 XL	109	W	11J	1030	290	844	313	8.5



SUV Tire



GREEN-Max 4x4 HP

New

SUV tires for urban highway use,
with good handling and low noise

1. Excellent handling performance.
2. Enhanced drainage performance to effectively reduce risk of hydroplaning;
3. Superior longitudinal stability for more comfortable ride;
4. Low noise to offer a quiet ride.

Rim Diameter (in)	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
15	205/70R15	96	H	6J	710	250	669	209	8.8
16	215/65R16 XL	102	H	6 1/2J	850	290	686	221	8.8
	215/70R16	100	H	6 1/2J	800	250	708	221	8.8
	225/65R16	100	H	6 1/2J	800	250	698	228	8.8
	225/75R16	104	H	6J	900	250	744	223	8.8
	235/60R16	100	H	7J	800	250	688	240	8.8
	235/70R16	106	H	7J	950	250	736	240	8.8
	245/70R16 XL	111	H	7J	1090	290	750	248	8.8
	265/70R16	112	H	8J	1120	250	778	272	8.8
	275/70R16	114	H	8J	1180	250	792	279	8.8
17	215/60R17	96	H	6 1/2J	710	250	690	221	8.8
	225/55R17 XL	101	V	7J	825	290	680	233	8.5
	225/60R17	99	V	6 1/2J	775	250	702	228	7.7
	225/65R17	102	H	6 1/2J	850	250	724	228	8.8
	235/55R17 XL	103	V	7 1/2J	875	290	690	245	8.5
	235/60R17 XL	106	V	7J	950	290	714	240	8.8
	235/65R17 XL	108	V	7J	1000	290	738	240	8.8
	245/65R17 XL	111	H	7J	1090	290	750	248	8.8
	255/60R17	106	H	7 1/2J	950	250	738	260	8.8
	255/65R17	110	H	7 1/2J	1060	250	764	260	8.8
	265/65R17	112	H	8J	1120	250	776	272	8.8
	275/55R17	109	V	8 1/2J	1030	250	734	284	8.8
18	215/55R18 XL	99	V	7J	775	290	693	226	7.7
	215/55R18	95	V	7J	690	250	693	226	8.2
	225/55R18	98	V	7J	750	250	705	233	7.7
	225/60R18	100	H	6 1/2J	800	250	727	228	8.8
	235/50R18	97	V	7 1/2J	730	250	693	245	8.1
	235/55R18 XL	104	V	7 1/2J	900	290	715	245	8.5
	235/60R18 XL	107	V	7J	975	290	739	240	8.8
	255/55R18 XL	109	VW	8J	1030	290	737	265	8.5
	255/60R18 XL	112	V	7 1/2J	1120	290	763	260	8.8
	275/60R18	113	H	8J	1150	250	787	279	8.8
19	255/50R19 XL	107	W	8J	975	290	739	265	8.1
	255/55R19 XL	111	V	8J	1090	290	763	265	8.5
20	275/40R20 XL	106	V	9 1/2J	950	290	728	278	8.1
	275/45R20 XL	110	V	9J	1060	290	756	273	8.1
22	285/35R22 XL	106	V	10J	950	290	759	290	8.1



CROSSWIND 4x4 HP

SUV tire with low rolling resistance and low noise

1. Excellent handling performance;
2. Enhanced drainage performance to effectively reduce risk of hydroplaning;
3. Superior longitudinal stability for more comfortable ride;
4. Low noise to offer a quiet ride.

Rim Diameter (in)	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
15	205/70R15	96	H	6J	710	250	689	209	8.5
16	205/70R16	97	V	6J	730	250	694	209	8.7
	215/65R16 XL	102	H	6 1/2J	850	290	696	221	8.5
	215/70R16	100	H	6 1/2J	800	250	708	221	8.5
	225/65R16	100	H	6 1/2J	800	250	698	228	8.5
	225/75R16	104	H	6J	900	250	744	223	8.5
	235/60R16	100	H	7J	800	250	688	240	8.5
	235/70R16	106	H	7J	950	250	736	240	8.5
	245/70R16 XL	111	H	7J	1090	290	750	248	8.5
	265/70R16	112	H	8J	1120	250	778	272	8.5
	275/70R16	114	H	8J	1180	250	792	279	8.5
17	215/60R17	96	H	6 1/2J	710	250	690	221	8.5
	225/55R17 XL	101	V	7J	825	290	680	233	8.2
	225/65R17	102	H	6 1/2J	850	250	724	228	8.5
	235/55R17 XL	103	V	7 1/2J	875	290	690	245	8.2
	235/60R17 XL	106	V	7J	950	290	714	240	8.5
	235/65R17 XL	108	V	7J	1000	290	738	240	8.5
	245/65R17 XL	111	H	7J	1090	290	750	248	8.5
	255/60R17	108	H	7 1/2J	950	250	738	260	8.5
	255/65R17	110	H	7 1/2J	1060	250	764	260	8.5
	265/65R17	112	H	8J	1120	250	776	272	8.5
	275/55R17	109	V	8 1/2J	1030	250	734	284	8.2

Rim Diameter (in)	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPag)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
18	225/55R18	98	V	7J	750	250	705	233	8.7
	225/60R18	100	H	6 1/2J	800	250	727	228	8.5
	235/55R18 XL	104	V	7 1/2J	900	290	715	245	8.2
	235/60R18 XL	107	V	7J	975	290	739	240	8.5
	235/65R18	106	H	7J	950	250	763	240	8.5
	245/60R18	105	V	7J	925	250	751	248	8.5
	255/55R18 XL	109	V	8J	1030	290	737	265	8.2
	255/60R18 XL	112	V	7 1/2J	1120	290	763	260	8.5
	255/65R18	111	H	7 1/2J	1090	250	789	260	8.7
	265/60R18	110	H	8J	1060	250	775	272	8.5
	265/65R18	114	H	8J	1180	250	801	272	8.7
	265/70R18	116	H	8J	1250	250	829	272	8.7
	275/60R18	113	H	8J	1150	250	787	279	8.5
	275/65R18	116	H	8J	1250	250	815	279	8.7
19	235/55R19 XL	105	V	7 1/2J	925	290	741	245	8.2
	245/55R19	103	V	7 1/2J	875	250	753	253	8.7
	255/50R19 XL	107	W	8J	975	290	739	265	8.7
	255/55R19 XL	111	V	8J	1090	290	763	265	8.2
	255/60R19	109	H	7 1/2J	1030	250	789	260	8.7
20	245/50R20	102	V	7 1/2J	850	250	754	253	8.7
	255/50R20 XL	109	V	8J	1030	290	764	265	8.7
	265/50R20 XL	111	V	8 1/2J	1090	2 90	774	277	8.7
	275/55R20 XL	117	V	8 1/2J	1285	290	810	284	8.7



CROSSWIND A/T

All Terrain Tire

1. Excellent wet performance;
2. Large angle grooves to improve self-cleaning ability;
3. An optimal balance between performance on road and off road.

Rim Diameter (in)	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
14	175/70R14 XL	/	88	H	5J	560	290	602	177	8.8
	175/80R14	/	88	T	5J	560	240	636	177	8.8
15	205/60R15	/	91	H	6J	615	250	627	209	8.8
	205/65R15	/	94	H	6J	670	250	647	209	8.8
	205/70R15	/	96	T	6J	710	250	669	209	8.8
	225/75R15	/	102	S	6J	850	250	719	223	9.2
	235/75R15 XL	/	109	T	6 1/2J	1030	290	733	235	9.2
	255/70R15	/	108	T	7 1/2J	1000	250	739	260	10.3
	265/70R15	/	112	S/T	8J	1120	250	753	272	11
	31X10.50R15LT	6PR	109	R	8 1/2J	1030	350	775	268	12.7
	LT215/75R15	6PR	100/97	S	6J	D730 S800	350	703	216	11
	LT225/75R15	6PR	102/99	S	6J	D775 S850	350	719	223	11.7
	LT225/75R15	6PR	104/101	R/S	6 1/2J	D825 S900	350	733	235	11.7
16	205/60R16	/	92	H	6J	630	550	774	248	11.2
	215/70R16	/	100	T	6 1/2J	800	550	804	267	11.2
	225/70R16	/	103	T	6 1/2J	875	250	738	240	9.7
	235/70R16	/	106	T/Q	7J	950	250	750	248	9.7
	245/70R16 XL	/	111	T	7J	1090	250	776	248	9.7
	245/75R16	/	111	T	7J	1090	250	776	272	9.7
	255/70R16	/	111	S	7 1/2J	1090	250	804	272	10.5
	265/70R16	/	112	Q/T	8J	1120	250	790	279	9.5
	265/75R16	/	116	T/Q	7 1/2J	1250	250	802	292	9.5
	275/70R16	/	114	S	8J	1180	550	800	248	11.2
	205R16LT	8PR	110/108	R/Q	6J	D1000 S1060	550	804	272	11.2
	LT215/85R16	10PR	115/112	Q	6J	D1120 S1215	550	829	272	11.2
	LT225/75R16	10PR	115/112	Q	6J	D1120 S1215	290	810	284	9
	LT235/85R16	10PR	120/116	S	6 1/2J	D1250 S 1400	250	776	272	9.7
	LT245/75R16	10PR	120/116	Q	7J	D1250 D1400	250	804	272	10.5
	LT265/75R16	10PR	123/120	R	7 1/2J	D1400 S1550	250	790	279	9.5
	LT285/75R16	10PR	126/123	R	8J	D1550 S1700	250	802	292	9.5
	LT305/70R16	10PR	124/121	R	9J	D1450 S1600	550	800	248	11.2

Rim Diameter (in)	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
17	235/65R17	/	104	T	7J	900	250	738	240	9.2
	245/65R17 XL	/	111	T	7J	1090	290	750	248	10.3
	245/70R17	/	110	S	7J	1060	250	776	248	10.3
	265/65R17	/	112	T/Q	8J	1120	250	776	272	10.7
	265/70R17	/	115	T	8J	1215	250	804	272	10.7
	P285/70R17	/	117	T	8 1/2J	1285	240	832	292	11
	LT235/80R17	10PR	120/117	R	6 1/2J	D1285 S1400	550	808	235	11.7
	LT245/70R17	10PR	119/116	Q	7J	D1250 S1360	550	776	248	12.3
	LT245/75R17	10PR	121/118	R	7J	D1320 D1450	550	800	248	12.3
	LT265/70R17	10PR	121/118	R/Q	8J	D1320 S1450	550	804	272	12.7
	LT285/70R17	8PR	121/118	S	8 1/2J	D1320 S1450	450	832	292	12.7
LT305/70R17	8PR	119/116	R	9J	D1250 S1360	350	860	311	12.7	
18	265/60R18	/	110	T	8J	1060	250	775	272	11
	265/70R18	/	116	T	8J	1250	250	829	272	11
	275/65R18	/	116	T	8J	1250	250	815	279	11
	285/60R18	/	116	T	8 1/2J	1250	250	799	292	11
	LT265/70R18	10PR	124/121	S	8J	D1450 S1600	550	829	272	12.7
	LT275/65R18	10PR	123/120	S	8J	D1400 S1550	550	815	279	12.7
	LT275/70R18	10PR	125/122	S	8J	D1500 S1650	550	843	279	12.7
20	P275/55R20	/	111	S	8 1/2J	1090	240	810	284	10.7
	P275/60R20	/	114	T	8J	1180	240	838	279	10.7
	35X12.50R20LT	10PR	121	Q	10J	1450	450	877	318	12.7
	LT265/60R20	10PR	121/118	R	8J	D1320 D1450	550	826	272	12.7
	LT275/65R20	10PR	126/123	S	8J	D1550 S1700	550	866	279	12.7
	LT285/55R20	10PR	122/119	S	9J	D1360 S1500	550	822	297	12.7
	LT285/65R20	10PR	127/124	S	8 1/2J	D 1600 S1750	550	878	292	12.7



CROSSWIND H/T

SUV Tire for Urban Road Use, with Low Noise and good dry/wet performance.

1. High drainage capability;
2. High comfort and low noise;
3. Excellent handling performance.

Rim Diameter (in.)	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
15	235/75R15 XL	/	109	T	6 1/2J	1030	290	733	235	9.7
	31X10.5R15LT	6PR	109	R	8 1/2J	1030	350	775	268	11.2
16	215/70R16	/	100	T	6 1/2J	800	250	708	221	9
	225/70R16	/	103	T	6 1/2J	875	250	722	228	9.5
	235/70R16	/	106	T	7J	950	250	736	240	9.5
	245/70R16	/	107	T	7J	975	250	750	248	9.7
	245/75R16	/	111	T	7J	1090	250	774	248	9.7
	255/70R16	/	111	T	7 1/2J	1090	250	764	260	9.7
	265/70R16	/	112	T	8J	1120	250	778	272	9.5
	265/75R16	/	116	T	7 1/2J	1250	250	804	267	9.7
	LT215/85R16	10PR	115/112	S	6J	D1120 S1215	550	772	216	11.2
	LT225/75R16	10PR	115/112	S	6J	D1120 S1215	550	744	223	11.2
	LT235/85R16	10PR	120/116	R	6 1/2J	D1250 S1400	550	806	235	11.2
	LT245/75R16	10PR	120/116	R	7J	D1250 S1400	550	774	248	11.2
LT265/75R16	10PR	123/120	R	7 1/2J	D1400 S1550	550	804	267	11.2	
17	235/65R17	/	104	T	7J	900	250	738	240	9.7
	245/65R17	/	107	T	7J	975	250	750	248	9.7
	245/70R17	/	110	T	7J	1060	250	776	248	9.7
	265/65R17	/	112	T	8J	1120	250	776	272	9.7
	265/70R17	/	115	T	8J	1215	250	804	272	10.5
	275/65R17	/	115	S	8J	1215	250	790	279	9.5
	285/65R17	/	116	S	8 1/2J	1250	250	802	292	9.5
	LT245/75R17	10PR	121/118	R	7J	D1320 S1450	550	800	248	11.2
	LT265/70R17	10PR	121/118	R	8J	D1320 S1450	550	804	272	11.2
18	LT265/70R18	10PR	124/121	R	8J	D1450 S1600	550	829	272	11.2
20	275/55R20 XL	/	117	T	8 1/2J	1295	290	810	284	9



CROSSWIND M/T

Mud-Terrain Tire

1. High floatation;
2. Higher load-carrying capacity;
3. Excellent Self-cleaning performance;
4. Aggressive tread pattern and sidewall design.

Rim Diameter in.	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
14	205R14C	8PR	109/107	R	6J	D975 S1030	450	686	208	11.5
15	30X9.50R15LT	6PR	104	Q	7 1/2J	900	350	756	240	13.7
	31X10.50R15LT	6PR	109	Q	8 1/2J	1030	350	781	268	14.7
	33X12.50R15LT	6PR	108	Q	10J	1000	250	832	318	14.7
	LT215/75R15	6PR	100/97	Q	6J	D730 S800	350	709	216	13.7
	LT235/75R15	6PR	104/101	Q	6 1/2J	D825 S900	350	739	235	13.7
16	205R16LT	8PR	110/108	Q	6J	D1000 S1060	450	740	208	14.7
	215/80R16	/	107	S	6J	975	290	750	216	11.5
	LT225/75R16	8PR	110/107	Q	6J	D975 S1060	450	750	223	13.7
	LT235/85R16	10PR	120/116	Q	6 1/2J	D1260 S1360	550	806	235	13.7
	LT245/75R16	10PR	120/116	Q	7J	D1260 S1360	550	774	248	13.7
	LT255/70R16	8PR	115/112	Q	7 1/2J	D1120 S1215	450	770	260	14.7
	LT265/70R16	6PR	110/107	Q	8J	D975 S1060	350	784	272	14.7
	LT265/75R16	10PR	123/120	Q	7 1/2J	D1400 S1550	550	810	267	14.7
	LT285/75R16	10PR	126/123	Q	8J	D1550 S1700	550	840	286	14.7
	LT305/70R16	8PR	118/115	Q	9J	D1215 S1320	350	840	311	14.7
	LT305/70R16	10PR	124/121	Q	9J	D1450 S1600	450	834	311	14.7
	LT315/75R16	8PR	121/118	Q	8 1/2J	D1320 S1450	350	884	313	14.6
	LT315/75R16	10PR	127/124	Q	10J	D1600 S1750	450	884	313	14.6
17	35X12.50R17LT	10PR	121	Q	10J	1450	450	883	318	14.7
	LT235/80R17	10PR	120/117	Q	6 1/2J	D1285 S1400	550	806	235	13.7
	LT265/70R17	10PR	121/118	Q	8J	D1285 S1400	550	810	272	14.6
	LT285/70R17	8PR	121/118	Q	8 1/2J	D1320 S1450	450	838	292	14.7
	LT285/70R17	10PR	121/118	Q	8 1/2J	D1320 S1450	550	838	292	14.7
	LT305/70R17	8PR	119/116	Q	9J	D1250 S1360	350	866	311	14.7
18	33X12.50R18LT	10PR	118	Q	10J	1320	450	832	318	14.7
	35X12.50R18LT	10PR	123	Q	10J	1550	450	883	318	14.6
	LT275/70R18	10PR	125/122	Q	8J	D1500 S1650	550	843	279	14.7
20	33X12.50R20LT	10PR	114	Q	10J	1180	450	832	318	16
	35X12.50R20LT	10PR	121	Q	10J	1450	450	883	318	16
	33X12.50R22LT	10PR	109	Q	10J	1030	450	826	318	16.0
	35X12.50R22LT	10PR	117	Q	10J	1285	450	877	318	16.0



LMB3

To Adapt To The Bad Road, Strong Traction,
High Product Pattern Recognition

1. Excellent traction and handling performance;
2. Excellent wear resistance performance;
3. All Terrain Tire.

Rim Diameter (in)	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
15	215/75R15	100	S	6J	800	250	703	216	9.2
	P215/75R15	100	S	6J	800	250	703	216	9.2
	235/75R15	105	S	6 1/2J	925	250	733	235	9.2
	P235/75R15	105	S	6 1/2J	925	250	733	235	9.2



RADIAL620

All Terrain tire

1. Excellent wet performance;
2. An optimal balance between performance on road and off road.

Rim Diameter (in)	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
15	205/70R15	/	96	H	6J	710	250	669	209	10.2
	265/70R15	/	112	H	8J	1120	250	753	272	10.2
16	205/80R16 XL	/	104	T	5 1/2J	900	290	734	203	10.2
	215/65R16	/	98	H	6 1/2J	750	250	686	221	10.2
	215/70R16	/	100	T	6 1/2J	800	250	708	221	10.2
	225/75R16 XL	/	108	R	6J	1000	290	744	223	9.2
	235/70R16	/	106	T	7J	950	250	736	240	10.2
	245/70R16	/	107	H	7J	975	250	750	248	10.2
	245/70R16 XL	/	111	H	7J	1090	290	750	248	10.2
	265/70R16	/	112	H	8J	1120	250	778	272	10.2
17	235/65R17 XL	/	108	H	7J	1000	290	738	240	10.2
	275/55R17	/	109	V	8 1/2J	1030	250	734	284	10.2



Light Truck Tire



GREEN-Max Van

Commercial tire with high grip performance

1. Big pattern blocks on the shoulder increase traction and 1. Better grip performance;
2. Low rolling resistance for high energy efficiency.

Rim Diameter (in)	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
12	5.00R12LT	10PR	88/86	P	3.50B	D530 S560	550	568	143	7.7
	155R12C	8PR	88/86	N	4.50B	D530 S560	450	553	157	8.0
13	155R13C	8PR	91/89	P	4 1/2J	D580 S615	450	578	157	8.0
	175R13C	8PR	97/95	Q	5.00B	D690 S730	450	610	177	8.3
14	165/70R14C	6PR	89/87	R	5J	D545 S580	375	588	170	8
	175R14LT	8PR	99/97	R	5J	D730 S775	450	636	177	8.2
	175/70R14C	6PR	95/93	T	5J	D650 S690	375	602	177	8.0
	185R14C	8PR	102/100	R	5 1/2J	D800 S850	450	650	188	8.8
	195R14C	8PR	106/104	P	5 1/2J	D900 S950	450	666	196	9
	205R14C	8PR	109/107	R	6J	D975 S1030	450	686	206	9.3
15	185R15LT	8PR	103/102	R	5 1/2J	D850 S875	450	677	189	8.7
	195R15C	8PR	106/104	R	5 1/2J	D900 S950	450	693	196	9.2
	195/70R15C	8PR	104/102	R	6J	D850 S900	450	655	201	9.8
	205/70R15C	8PR	106/104	S	6J	D900 S950	450	669	209	9.3
	225/70R15C	8PR	112/110	R	6 1/2J	D1060 S1120	450	697	228	9.8
	215/70R15C	8PR	104/101	R	6 1/2J	D825 S900	450	683	221	10.7
	225/70R15C	8PR	106/103	R	6 1/2J	D875 S950	450	697	228	11.2
16	185/75R16C	8PR	104/102	R	5J	D850 S900	475	684	184	9.3
	195/75R16C	8PR	107/105	R	5 1/2J	D925 S975	475	698	196	9.8
	205/75R16C	8PR	110/108	R	5 1/2J	D1000 S1060	475	714	203	9.3
	215/70R16C	6PR	108/106	T	6 1/2J	D950 S1000	375	708	221	9.3
	215/75R16C	8PR	113/111	R	6J	D1090 S1150	475	728	216	9.8
	225/75R16C	10PR	121/120	R	6J	D1400 S1450	575	744	223	9.8



GREEN-Max Van^{HP}

Commercial tire with high grip performance

1. Excellent stability;
2. Great grip performance and driving force of turning;
3. Low rolling resistance for higher energy efficiency.

Rim Diameter (in)	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
14	175/65R14C	6PR	90/88	T	5J	D 560 S 600	375	584	177	7.7
15	215/65R15C	6PR	104/102	T	6 1/2J	D 850 S 900	375	661	221	9.2
16	195/65R16C	8PR	104/102	R	6J	D 850 S 900	475	660	201	9
	205/65R16C	8PR	107/105	R	6J	D 925 S 975	475	672	209	9.2
	215/60R16C	6PR	103/101	T	6 1/2J	D 825 S 875	375	664	221	9.2
	215/65R16C	8PR	109/107	R	6 1/2J	D 975 S 1030	475	686	221	9.2
	225/65R16C	8PR	112/110	R	6 1/2J	D 1060 S 1120	475	698	228	9.2
	235/65R16C	8PR	115/113	R	7J	D 1150 S 1215	475	712	240	9.2



RADIAL620

Suitable For Off-Road Tire

1. Excellent traction.
2. Skid prevention on wet road.
3. Robust structure to improve bead durability.

Rim Diameter (in)	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
14	185R14C	B	102/100	Q	5 1/2J	D800 S850	450	652	189	8.7
	195R14C	B	106/104	Q	5 1/2J	D875 S925	450	668	196	8.9



R701

Lower Weight Trailer Tire

1. Low fuel consumption;
2. Budget Tires.

Rim Diameter (in)	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
10	195/55R10C	/	99/96	N	6J	D710 S750	625	468	201	6.7
12	155/70R12	/	73	S	4.50B	365	250	523	157	6.2
	155/70R12C	/	100/98	N	4 1/2J	D750 S800	650	523	157	6.7
	155/70R12C	/	104/102	N	4 1/2J	D850 S900	625	523	157	6.7
	185/60R12C	/	104/101	N	5 1/2J	D825 S900	650	527	189	6.7
	195/60R12C	/	104/102	N	6J	D850 S900	650	539	202	6.7
13	135/80R13 XL	/	74	N	3.50B	375	290	546	133	6.2
	145/70R13	/	74	N	4.50J	345	250	534	150	6.2
	145/80R13 XL	/	79	N	4.00B	437	280	562	145	6.2
	155/70R13	/	75	N	4.50B	387	250	548	157	6.2
	155/80R13 XL	/	84	N	4.50B	500	290	578	157	6.2
	165/65R13	/	77	N	5.00B	412	250	544	170	6.2
	165/70R13	/	79	N	5.00B	437	250	562	170	6.2
	175/70R13	/	82	N/H	5.00B	475	250	576	177	6.2
	175/70R13 XL	/	86	N	5.00B	530	290	576	177	6.2
	185/70R13	/	86	N	5.50B	530	250	590	189	6.2
	165R13C	8PR	94/92	N	4.50B	D630 S670	450	596	167	6.7
	165R13C	8PR	96/94	N	4 1/2J	D670 S710	450	596	167	6.7
	185/70R13C	/	106/104	N	5 1/2J	D900 S950	600	590	189	6.2
	195/50R13C	/	104/101	N	6J	D825 S900	650	526	201	6.7
14	165/55R14	/	72	H	5J	355	250	538	170	6.2
	175/65R14	/	82	T/H	5J	475	250	584	177	6.2
	185/60R14	/	82	H	5 1/2J	475	250	576	189	6.2
	195/70R14 XL	/	96	N	6J	710	290	630	201	6.2
	165R14LT	6PR	91/90	S	4 1/2J	D600 S615	350	620	165	7.8
	165R14LT	8PR	96/95	T	4 1/2J	D690 S710	450	620	165	7.5
	185R14C	8PR	102/100	N	5 1/2J	D800 S850	450	650	188	6.7
	195R14C	8PR	106/104	N	5J	D900 S950	450	666	198	6.7
15	195/55R15	/	85	H	6J	515	250	595	201	6.2
	195/60R15	/	88	H	6J	560	250	615	201	6.2



LMC4

Increased mileage with high wear resistance

Excellent wear resistance performance.

Rim Diameter (in)	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
15	6.50R15LT	8PR	101/97	N	5.50F	D730 S825	460	730	185	9.7
	7.00R15LT	10PR	110/105	L	5.50F	D925 S1060	560	750	200	9.7
16	6.50R16C	10PR	107/103	N	5.50F	D875 S975	560	750	185	9.7
	6.50R16C	10PR	108/107	L	5.50F	D975 S1000	500	750	185	9.7
	6.50R16C	12PR	110/105	M	5.50F	D925 S1060	670	750	185	9.7
	7.50R16LT	10PR	116/112	L	6.00G	D1120 S1250	560	805	215	11.2
	7.50R16LT	14PR	122/118	L	6.00G	D1320 S1500	770	805	215	11.2
	7.50R16LT	12PR	120/116	M	5.50F	D1250 S1400	670	805	215	11.2



LMC5

Increased mileage with high wear resistance

1. Freight vehicles;
2. High mileage.

Rim Diameter (in)	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
14	185R14C	8PR	102/100	Q/N	5 1/2J	D800 S850	450	652	189	10.2
	195R14LT	8PR	106/104	P	5 1/2J	D900 S950	450	668	196	10.2



LMC7

All Terrain Tire

Excellent wear resistance performance

Rim Diameter (in.)	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
15	195R15C	8PR	106/104	Q	5 1/2J	D900 S950	450	690	198	9.7
	195R15C(WHITE)	8PR	106/104	Q	5 1/2J	D900 S950	450	690	198	9.7



LMC8

Excellent wear resistance performance

High steering and abrasion performance

Rim Diameter (in.)	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
14	195R14C	8PR	106/104	P	5 1/2J	D 900 S 950	450	668	196	9.2
	195R14C(WHITE)	8PR	106/104	L	5.50F	D 900 S 950	450	668	196	9.2
	205R14C	8PR	109/107	P	5 1/2J	D 975 S 1030	450	684	206	9.2
15	205R15C	8PR	110/108	R	6 J	D 1000 S 1060	450	711	209	9.2
	205R15C(WHITE)	8PR	110/108	R	6 J	D 1000 S 1060	450	711	209	9.2



LMB3

All Terrain tire

1. Excellent traction and handling performance;
2. Excellent wear resistance performance;
3. All Terrain Tire.

Rim Diameter (in)	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
15	195/70R15C	8PR	99/96	R	6J	D710 S775	450	655	201	10.2
	195/70R15C (WHITE)	8PR	104/102	R	6J	D850 S900	450	655	201	10.2



RADIAL655

Excellent steering and high wear resistance

1. Good drainage performance and stability;
2. Good wear resistance;
3. Excellent steering performance..

Rim Diameter (in)	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
12	5.00R12LT	8PR	83/81	N	3.50B	D482 S487	450	568	143	7.2



LL776

Budget Tire with high wear resistance

1. Good steering performance;
2. High wear resistance.

Rim Diameter (in)	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
12	5.00R12LT	8PR	83/81	P	3.50B	D462 S487	400	568	143	7.8
	5.00R12LT	10PR	88/86	P	3.50B	D530 S560	500	568	143	7.8
13	5.50R13LT	12PR	97/95	P	4.00B	D690 S730	625	620	160	8



RADIAL616

Increased mileage with high wear resistance

1. Excellent traction and handling performance
2. Excellent wear resistance performance
3. All Terrain Tire

Rim Diameter (in)	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
15	215R15C	8PR	111/109	T	6J	D1030 S1090	450	725	216	10.2
	30X9.50R15LT	6PR	104	Q	7 1/2J	900	350	750	240	11.2
	31X10.50R15LT	6PR	109	Q	8 1/2J	1030	350	775	268	11.2



RADIAL R751

High Mileage Tire

1. High wear resistance;
2. Self-cleaning properties;
3. All Season Tire for light trucks.

Rim Diameter (in.)	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
13	6.00R13LT	10PR	98/93	N	4.50B	D650 S750	550	655	170	10.2
14	6.00R14LT	10PR	100/96	N	4 1/2J	D710 S800	550	680	170	10.2
15	6.00R15LT	8PR	97/92	L	4.50E	D630 S730	480	705	170	10.2
16	7.00R16LT	12PR	115/110	M/N	5.50F	D1060 S1215	670	775	200	10.7



LL850

Designed For Snow And Ice Road Exhibits Wear Resistance

1. An all position heavy duty light truck tire suitable for commercial applications.
2. Suitable for both on and off road use.
3. Pinned for studs to provide additional winter traction.
4. M&S designated.

Rim Diameter (in.)	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
16	LT235/85R16	10PR	120/116	Q	6 1/2J	D1250 S1400	550	806	235	13.7
	LT245/75R16	10PR	120/116	Q	7J	D1250 S1400	550	774	248	13.7
	LT265/75R16	10PR	123/120	Q	7 1/2J	D1400 S1550	550	804	267	14.7
	LT285/75R16	10PR	126/123	Q	8J	D1550 S1700	550	834	266	14.7
17	LT235/80R17	10PR	120/117	Q	6 1/2J	D1285 S1400	550	808	235	13.7
	LT265/70R17	10PR	121/118	Q	8J	D1320 S1450	550	804	272	14.7
	LT285/70R17	8PR	121/118	Q	8 1/2J	D1320 S1450	550	832	292	14.7
18	LT275/65R18	10PR	123/120	Q	8J	D1400 S1550	550	815	279	14.7



RADIAL666

Commercial tire with Excellent wear and wet performance

1. Excellent traction;
2. Excellent wet braking;
3. High wear resistance.

Rim Diameter (in)	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
12	155R12C	6PR	83/81	N	4.50B	D462 S487	350	553	157	7.8
13	175R13LT	8PR	97/95	Q	5.00B	D690 S730	450	609	182	7.8
14	165/70R14C	6PR	89/87	R	5J	D545 S590	375	588	170	8.3
	185R14C	8PR	102/100	R/Q	5 1/2J	D800 S850	450	652	189	9.5
	185R14LT	6PR	97/95	R	5 1/2J	D690 S730	350	652	189	9.5
	185R14LT	8PR	102/100	R	5 1/2J	D800 S850	450	652	189	9.5
	195R14C	8PR	106/104	P	5 1/2J	D875 S925	450	668	196	9.7
	195/75R14C	8PR	106/104	R	5 1/2J	D900 S950	475	648	196	9.7
	205/75R14C	8PR	109/107	R	5 1/2J	D975 S1030	475	664	203	9.2
	215R14C	8PR	110/108	R	6J	D1000 S1060	450	700	218	9.7
215/75R14C	8PR	112/110	R	6J	D1060 S1120	475	678	216	9.7	
15	195/70R15C	10PR	104/102	R	6J	D850 S900	550	655	201	10.2
	205/70R15C	8PR	106/104	S	6J	D900 S950	450	669	209	9.2
	215/70R15C	8PR	109/107	R	6 1/2J	D975 S1030	450	683	221	9.7
	225/70R15C	8PR	112/110	R	6 1/2J	D1060 S1120	450	697	228	9.2
16	175/75R16C	8PR	101/99	R	5J	D775 S825	475	668	177	8.3
	185/75R16C	8PR	104/102	R	5J	D850 S900	475	684	184	8.3
	195/65R16C	8PR	104/102	R	6J	D850 S900	475	660	201	9.2
	195/75R16C	8PR	107/105	R	5 1/2J	D925 S975	475	698	196	9.7
	205/65R16C	8PR	107/105	R	6J	D925 S975	475	672	209	9.2
	205/75R16C	8PR	110/108	R	5 1/2J	D1000 S1060	475	714	203	9.2
	215/65R16C	8PR	109/107	R	6 1/2J	D975 S1030	475	686	221	9.2
	215/75R16C	8PR	113/111	R	6J	D1090 S1150	475	728	216	9.2
	225/65R16C	8PR	112/110	R	6 1/2J	D1060 S1120	475	698	228	9.3
	225/75R16C	10PR	121/120	R	6J	D1400 S1450	575	744	223	9.2
	235/65R16C	8PR	115/113	R	7J	D1150 S1215	475	712	240	9.2

Winter Tire





GREEN-Max Winter Ice I-15 New

Outstanding handling performance

1. Direction tread pattern design providing excellent handling performance;
2. Directional grooves to help evacuate snow and mud.

Rim Diameter In	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
14	175/65R14 XL	86	T	5J	530	290	584	177	8.7
	185/60R15 XL	88	T	5 1/2J	560	290	603	189	8.7
15	185/65R15 XL	92	T	5 1/2J	630	290	621	189	8.7
	195/65R15 XL	95	T	6J	690	290	635	201	8.7
	195/55R16 XL	91	T	6J	615	290	620	201	8.7
16	205/55R16 XL	94	T	6 1/2J	670	290	632	214	8.7
	205/60R16 XL	96	T	6J	710	290	652	209	8.7
	215/55R16 XL	97	T	7J	730	290	642	226	8.7
	215/60R16 XL	99	T	6 1/2J	775	290	664	221	8.7
	215/65R16 XL	102	T	6 1/2J	850	290	686	221	8.7
	225/55R16 XL	99	T	7J	775	290	654	233	8.7
	205/50R17 XL	93	T	6 1/2J	650	290	638	223	8.7
17	225/45R17 XL	94	T	7 1/2J	670	290	634	225	8.7
	225/50R17 XL	98	T	7J	750	290	658	233	8.7
	225/55R17 XL	101	T	7J	825	290	680	233	8.7
	235/45R17 XL	97	T	8J	730	290	644	236	8.7





GREEN-Max Winter Ice I-15 SUV New

Outstanding handling performance

1. Directional grooves design for evacuate snow and mud;
2. Complex soft tread compound and 3D sipes technology to promote handling performance on ice and snow condition.

Rim Diameter (in)	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
15	205/70R15	96	T	6J	710	250	689	209	9.7
	215/75R15	100	T	6J	800	250	703	216	9.7
16	215/65R16	98	T	6 1/2J	750	250	686	221	9.7
	225/60R16	98	T	6 1/2J	750	250	676	228	9.7
	235/70R16	106	T	7J	950	250	736	240	9.7
	245/70R16	107	H	7J	975	250	750	248	9.7
	275/70R16	114	T	8J	1180	250	792	279	9.7
17	215/60R17	96	T	6 1/2J	710	250	690	221	9.7
	225/60R17	99	T	6 1/2J	775	250	702	228	9.7
	225/65R17	102	T	6 1/2J	850	250	724	228	9.7
	225/65R17 XL	106	T	6 1/2J	950	290	724	228	9.7
	235/55R17	99	T	7 1/2J	775	250	690	245	9.7
	235/65R17 XL	108	T	7J	1000	290	738	240	10
	245/65R17	107	T	7J	975	250	750	248	9.7
	255/60R17	106	T	7 1/2J	960	250	738	260	9.7
	265/65R17	112	T	8J	1120	250	776	272	9.7
18	275/65R17	115	T	8J	1215	250	790	279	9.7
	225/55R18	98	T	7J	750	250	705	233	9.7
	225/60R18	100	T	6 1/2J	800	250	727	228	9.7
	235/50R18	97	T	7 1/2J	730	250	693	245	9.7
	235/55R18	100	T	7 1/2J	800	250	715	245	9.7
	235/60R18	103	T	7J	875	250	739	240	9.7
	235/60R18 XL	107	T	7J	975	290	739	240	9.7
	245/45R18	96	T	8J	710	250	677	243	9.7
	245/50R18	100	T	7 1/2J	800	250	703	253	9.7
	245/60R18	105	T	7J	925	250	751	248	9.7
	255/40R18	95	T	9J	690	250	661	260	9.7
	255/55R18	105	T	8J	925	250	737	265	9.7
	255/60R18 XL	112	H	7 1/2J	1120	290	763	260	9.7
19	265/60R18	110	T	8J	1060	250	775	272	9.7
	285/60R18	116	T	8 1/2J	1250	250	799	292	9.7
	225/55R19	99	T	7J	775	250	731	233	9.7
	235/55R19 XL	105	H	7 1/2J	925	290	741	245	9.7
	245/55R19	103	T	7 1/2J	875	250	753	253	9.7
	255/40R19	96	T	9J	710	250	687	260	9.7
	255/45R19	100	T	8 1/2J	800	250	713	255	9.7
	255/50R19	103	T	8J	875	250	739	265	9.7
20	255/55R19	107	T	8J	975	250	763	265	9.7
	285/50R19	106	T	8 1/2J	950	250	749	277	9.7
	245/45R20	99	T	8J	775	250	728	243	9.7
	255/45R20	101	T	8 1/2J	825	250	738	255	9.7
	255/50R20 XL	109	H	8J	1030	290	764	265	9.7
	255/55R20 XL	110	T	8J	1060	290	788	265	9.7
	275/45R20 XL	110	T	9J	1060	290	756	273	9.7
275/55R20	113	T	8 1/2J	1150	250	810	284	9.7	



GREEN-Max Winter Ice I-16

New

Excellent snow handling and ice braking&acceleration

1. Outstanding grip and traction performance on ice and snow surface;
2. Better braking and acceleration property.

Rim Diameter (in)	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
12	145/70R12	69	T	4.50B	325	250	509	150	8.3
13	165/70R13	79	T	5.00B	437	250	562	170	8.3
	175/70R13	82	T	5.00B	475	250	576	177	8.7
14	165/60R14	75	T	5J	387	250	554	170	8.3
	165/70R14	81	T	5J	462	250	588	170	8.3
	175/70R14	84	T	5J	500	250	602	177	8.3
	185/60R14	82	T	5 1/2J	475	250	578	189	8.7
	185/65R14	86	T	5 1/2J	530	250	596	189	8.7
	185/70R14	88	T	5 1/2J	560	250	616	189	8.7
	195/60R14	86	T	6J	530	250	590	201	8.7
	215/75R14	100	T	6J	800	250	678	216	8.7
15	175/65R15	84	T	5J	500	250	609	177	8.7
	185/55R15	82	T	6J	475	250	585	194	8.7
	185/60R15	84	T	5 1/2J	500	250	603	189	8.7
	185/65R15	88	T	5 1/2J	560	250	621	189	8.7
	195/55R15	85	T	6J	515	250	595	201	8.7
	195/60R15	88	T	6J	560	250	615	201	8.7
	195/65R15	91	T	6J	615	250	635	201	8.7
	205/65R15	94	T	6J	670	250	647	209	8.7
16	205/55R16 XL	94	T	6 1/2J	670	290	632	214	8.7
	205/60R16	92	T	6J	630	250	652	209	8.7
17	215/50R17	91	T	7J	615	250	648	226	8.7
	215/55R17	94	T	7J	670	250	668	226	8.7
18	225/45R18	91	T	7 1/2J	615	250	659	225	8.7
	235/45R18	94	T	8J	670	250	669	236	8.7
19	225/45R19	92	T	7 1/2J	630	250	685	225	8.7



GREEN-Max Winter UHP

UHP Snow Tire with Excellent Wet Grip and Low Noise, good braking performance on ice&snow condition

1. Better wet grip on snow road surface;
2. Lower noise;
3. Outstanding snow handling performance.

Rim Diameter (in)	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
15	185/55R15 XL	86	H	6J	530	290	585	194	8.5
	195/50R15	82	H	6J	475	250	577	201	8.5
	195/55R15	85	H	6J	515	250	595	201	8.8
16	195/55R16 XL	91	H	6J	615	290	620	201	8.8
	225/55R16 XL	99	H	7J	775	290	654	233	8.8
	225/60R16 XL	102	H	6 1/2J	850	290	676	228	8.8
17	205/45R17 XL	88	V	7J	560	290	616	206	8.8
	205/50R17 XL	93	V	6 1/2J	650	290	638	214	8.8
	215/45R17 XL	91	V	7J	615	290	626	213	8.8
	215/50R17 XL	95	V	7J	690	290	648	226	8.8
	215/55R17	94	V	7J	670	250	668	226	8.8
	215/60R17	96	H	6 1/2J	710	250	690	221	8.8
	225/45R17 XL	94	V	7 1/2J	670	290	634	225	8.8
	225/50R17 XL	98	V	7J	750	290	658	233	8.8
	225/55R17 XL	101	V	7J	825	290	680	233	8.8
	235/45R17 XL	97	H	8J	730	290	644	236	8.8
	235/55R17 XL	103	V	7 1/2J	875	290	690	245	8.8
18	225/40R18 XL	92	V	8J	630	290	637	230	8.8
	225/45R18 XL	95	H	7 1/2J	690	290	659	225	8.8
	235/45R18 XL	96	V	8J	750	290	669	236	8.8
	235/55R18 XL	104	H	7 1/2J	900	290	715	245	8.8
	235/60R18 XL	107	H	7J	975	290	739	240	8.8
	245/40R18 XL	97	V	8 1/2J	730	290	653	248	8.8
	245/45R18 XL	100	H	8J	800	290	677	243	8.8
19	255/45R19 XL	104	H	8 1/2J	900	290	713	255	8.8
	255/55R19 XL	111	H	8J	1090	290	763	265	8.8
20	245/45R20 XL	103	H	8J	875	290	728	243	8.8
	275/45R20 XL	110	H	9J	1060	290	756	273	8.8



GREEN-Max Winter HP

Good Wet-Skrip And Lower Noise Winter Tire Has Excellent Wet-Braking Performance

1. Excellent snow evacuation;
2. Good handling and traction performance on ice and snow surface.

Rim Diameter (in)	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
13	155/70R13	75	T	4.50B	387	250	548	157	8.2
	155/80R13	79	T	4.50B	437	240	578	157	8.2
	165/70R13	79	T	5.00B	437	250	562	170	8.2
	175/70R13	82	T	5.00B	475	250	576	177	8.2
14	155/65R14	75	T	4 1/2J	387	250	558	157	8.2
	165/65R14	79	T	5J	437	250	570	170	8.2
	165/70R14	81	T	5J	462	250	588	170	8.2
	175/65R14 XL	86	H	5J	530	290	584	177	8.2
	175/70R14	84	T	5J	500	250	602	177	8.2
	185/60R14	82	T	5 1/2J	475	250	578	189	8.5
	185/65R14	86	T	5 1/2J	530	250	596	189	8.5
15	175/65R15 XL	88	H	5J	560	290	609	177	8.0
	185/60R15 XL	88	H	5 1/2J	560	290	603	189	8.5
	185/65R15 XL	92	H	5 1/2J	630	290	621	189	8.5
	195/60R15 XL	92	H	6J	630	290	615	201	8.5
	195/65R15 XL	95	T	6J	690	290	635	201	8.5
	205/65R15 XL	99	H	6J	775	290	647	209	8.5
	205/70R15	96	T	6J	710	250	669	209	8.5
16	205/55R16 XL	94	H	6 1/2J	670	290	632	214	8.5
	205/60R16 XL	96	H	6J	710	290	652	209	8.5
	215/55R16 XL	97	H	7J	730	290	642	226	8.5
	215/60R16 XL	99	H	6 1/2J	775	290	664	221	8.5
	215/65R16	96	H	6 1/2J	750	250	686	221	8.5



GREEN-Max Winter Grip

(Can not sale in CANADA)

Studdable Snow Tire With Outstanding Braking Performance on Ice&snow Condition

1. Designed for ice and snow surface;
2. Directional tread pattern design for excellent snow traction performance;
3. Great grip and handling performance on ice and snow surface.

Rim Diameter (in)	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
13	155/70R13	75	T	4.50B	387	250	548	157	9.7
	155/80R13	79	T	4.50B	437	240	578	157	9.7
	165/70R13	79	Q	5.00B	437	250	562	170	9.7
	175/70R13	82	T	5.00B	475	250	576	177	9.7
14	175/65R14 XL	86	T	5J	530	290	584	177	9.7
	185/60R14	82	T	5 1/2J	475	250	578	189	9.7
	185/65R14 XL	90	T	5 1/2J	600	290	596	189	9.7
	185/70R14 XL	92	T	5 1/2J	630	290	616	189	9.7
15	185/55R15 XL	86	T	6J	530	290	585	194	9.7
	185/65R15	88	T	5 1/2J	580	250	621	189	9.7
	195/60R15 XL	92	T	6J	630	290	615	201	9.7
	195/65R15 XL	95	T	6J	690	290	635	201	9.7
	205/65R15 XL	99	T	6J	775	290	647	209	9.7
16	205/55R16 XL	94	T	6 1/2J	670	290	632	214	9.7
	205/60R16 XL	96	T	6J	710	290	652	209	9.7
	215/55R16 XL	97	T	7J	730	290	642	226	9.7
	215/65R16	96	T	6 1/2J	750	250	686	221	9.7
17	215/50R17 XL	95	T	7J	690	290	648	226	9.7
	225/45R17 XL	94	T	7 1/2J	670	290	634	225	9.7
	225/55R17	97	T	7J	730	250	680	233	9.7



GREEN-TRAC Winter Grip^{SUV}

(Can not sale in CANADA)

Studdable snow tire with outstanding braking performance on ice&snow condition

1. Designed for ice and snow surface;
2. Excellent snow traction performance with directional tread pattern design;
3. Great grip and handling performance on ice and snow surface;
4. Designed for SUVs.

Rim Diameter (in)	Size	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPg)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
17	225/65R17 XL	106	T	6 1/2J	950	290	724	228	9.7
	235/60R17 XL	106	T	7J	950	290	714	240	9.7
	235/65R17 XL	108	T	7J	1000	290	738	240	9.7
18	225/55R18	98	T	7J	750	250	705	233	9.7
	255/55R18 XL	109	T	8J	1030	290	737	265	9.7
	275/60R18 XL	117	T	8J	1285	290	787	279	9.7
20	275/45R20 XL	110	T	9J	1060	290	756	273	9.7
	275/55R20 XL	117	T	8 1/2J	1285	290	810	284	9.7



GREEN-Max Winter Van

Excellent wet grip performance

1. Excellent wet braking;
2. Better snow evacuation ability;
3. lower noise.

Rim Diameter (in.)	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
14	185R14C	8PR	102/100	Q	6J	D800 S850	450	652	189	9.8
	195R14C	8PR	106/104	P	5 1/2J	D900 S950	450	666	198	10
15	195/70R15C	8PR	104/102	R	6J	D850 S900	450	655	201	10.2
	225/70R15LT	8PR	106/103	R	6 1/2J	D875 S950	450	697	228	10.2
	225/70R15C	8PR	112/110	R	6 1/2J	D1060 S1120	450	697	228	10.2
16	175/75R16C	8PR	101/99	R	5J	D775 S825	475	668	177	9.8
	185/75R16C	8PR	104/102	R	5J	D850 S900	475	684	184	9.8
	195/75R16C	8PR	107/105	R	5 1/2J	D925 S975	475	698	196	10.2
	205/75R16C	8PR	110/108	R	5 1/2J	D1000 S1060	475	714	203	10.2
	215/75R16C	8PR	113/111	R	6J	D1000 S1061	475	728	216	10.2
	225/65R16C	8PR	112/110	R	6 1/2J	D1000 S1062	475	698	228	10
	225/75R16C	10PR	121/120	R	6J	D1000 S1063	575	744	223	10.2
235/65R16C	10PR	121/119	R	7J	D1000 S1064	575	712	240	10	



TBR TIRE

Long Haul





ETS100 New —

Radial Truck Tire (For international long-distance transportation)

- 1 Suitable for steer axle of trucks running with high speed on highway.
- 2 Low rolling resistance, reducing fuel consumption.
- 3 Lasting grip and stability by hidden groove design.
- 4 New pattern design, improving mileage for long distance transportation.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	14.5	ETRTO
315/60R22.6	18	154/150 (152/148)	L(M)	9.75	3350	900	3750	900	1014	312	14.5	ETRTO
315/70R22.5	16	154/150 (152/148)	L(M)	9.00	3350	900	3750	900	1014	312	15.0	ETRTO
315/70R22.5	18	156/150 (154/150)	L(M)	9.00	3350	900	4000	900	1014	312	15.0	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	15.0	ETRTO
315/80R22.5	20	156/150 (154/150)	L(M)	9.00	3350	850	4000	850	1076	312	15.0	ETRTO
315/80R22.5	22	158/150 (154/150)	L(M)	9.00	3350	900	4250	900	1076	312	15.0	ETRTO



ETD100 New —

Radial Truck Tire (For international long-distance transportation)

- 1 Suitable for drive axle of trucks running with high speed on highway.
- 2 Low rolling resistance, reducing fuel consumption.
- 3 Lasting grip and stability by hidden groove design, with M+S and 3PMSF marking.
- 4 New pattern design, improving mileage for long distance transportation.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	16.5	ETRTO
315/70R22.5	18	154/150 (152/148)	L(M)	9.00	3350	900	3750	900	1014	312	16.5	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	17.0	ETRTO
315/80R22.5	20	156/150 (154/150)	L(M)	9.00	3350	850	4000	850	1076	312	17.0	ETRTO



KTD10 New —

Radial Truck Tire (Long Haul DRIVE)

- 1 Suitable for drive axle of trucks running with high speed on highway.
- 2 Low rolling resistance, reducing fuel consumption.
- 3 Closed shoulder to fight irregular wear.
- 4 New pattern design, improving mileage for long distance transportation.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1065	279	23.8	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1065	279	23.8	TRA
11R24.5	14	146/143	L	8.25	2725	720	3000	720	1116	279	23.8	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1116	279	23.8	TRA
285/75R24.5	14	144/141	L	8.25	2575	760	2800	760	1062	283	22.2	TRA
285/75R24.5	16	147/144	L	8.25	2800	830	3075	830	1062	283	22.2	TRA
295/75R22.5	14	144/141	L	9.00	2575	760	2800	760	1026	298	22.2	TRA
295/75R22.5	16	148/143	L	9.00	2725	830	3000	830	1026	298	22.2	TRA



LFE805

Radial Truck Tire For Highway (Long Haul)

- 1 S-shaped groove bottom reduces stone retention.
- 2 Good handling and high-speed performance.
- 3 Low rolling resistance.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	15.0	ETRTO
295/80R22.5	18	150/147	M	9.00	3075	830	3350	830	1044	298	15.0	GB
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	15.0	GB
315/80R22.5	18	154/151	M	9.00	3450	830	3750	830	1076	312	15.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	15.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	15.0	ETRTO



LDE803

Radial Truck Tire (Long Haul)

1. Suitable for trucks running with high speed on highway.
2. Low fuel consumption.
3. Good braking and grip on wet road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
295/60R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	20.0	ETRTO
295/60R22.5	16	150/147	M	9.00	3075	830	3350	830	1044	298	20.0	GB
315/60R22.5	18	154/151	M	9.00	3450	830	3750	830	1076	312	18.5	GB
315/60R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	18.5	ETRTO
315/60R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	18.5	ETRTO



LLD01

Radial Truck Tire (Long Haul)

1. Suitable for trucks running with high speed on highway.
2. Good grip and high-speed performance.
3. Low fuel consumption.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1059	279	20.0	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1059	279	20.0	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1059	279	20.0	ETRTO
12R22.5	16	150/147	L	9.00	3075	830	3350	830	1085	300	20.0	GB
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	20.0	ETRTO
315/60R22.5	18	154/151	M	9.00	3450	830	3750	830	1076	312	19.5	GB
315/60R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	19.5	ETRTO
315/60R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	19.5	ETRTO



LTL869 New —

Radial Truck Tire (Long Haul)

1. Suitable for trailer axle of the trucks running on highway.
2. Reduced CO2 emission.
3. Reduced fuel consumption.
4. Retreadable and Regroovable.
5. Lasting grip and stability on wet road surfaces.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Single							
					kg	kPa	kg	kPa				
445/45R19.5	20	160	J	15.00	—	—	4500	900	895	446	12.5	ETRTO



T820

Radial Truck Tire (Long Haul)

Suitable for trailer axle of the trucks running on highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
445/45R19.5	18	156	J	15.00	—	—	4000	900	895	446	15.5	ETRTO
445/45R19.5	20	160	J	15.00	—	—	4500	900	895	446	15.5	ETRTO
435/50R19.5	18	156	J	14.00	—	—	4000	850	931	438	12.5	ETRTO
435/50R19.5	20	160	J	14.00	—	—	4500	900	931	438	12.5	ETRTO
385/55R19.5	18	156	J	12.25	—	—	4000	900	919	386	12.5	ETRTO
305/70R19.5	18	148/145	M	9.00	2900	850	3150	850	923	305	12.0	ETRTO



T830

Radial Truck Tire (Long Haul)

1. Suitable for the trailer axle of trucks running on highway.
2. Low rolling resistance.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
385/55R22.5	18	158	L	12.25	—	—	4250	850	996	386	15.5	ETRTO
385/55R22.5	20	160	J	12.25	—	—	4500	900	996	386	15.5	ETRTO



LFE891 New —

Radial Truck Tire (Long Haul)

1. Maximize tread volume for long original life and lower tread wear cost per mile.
2. Equalizer ribs Absorb irregular wear , promoting uniform rib wear and higher removal mileage.
3. Micro sipes Protect against irregular wear.
4. Optimized groove angle & stone rejection design.
5. Help resist stone retention.
6. Advanced technology compounds.
7. Helps reduce rolling resistance and improve optimum fuel efficiency.

8. Optimizes the footprint for even wear and long tread life.
9. Strong carcass materials.
10. Help promote tire durability and provide tire retreadability.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
295/75R22.5	14	144/141	L	9.00	2575	760	2800	760	1014	298	16.5	TRA
295/75R22.5	16	146/143	L	9.00	2725	830	3000	830	1014	298	16.5	TRA



LDE892 New —

Radial Truck Tire (Long Haul)

1. Suitable for the drive axle of the trucks running on highway.
2. Good braking and grip on wet road.
3. Long life, Low rolling resistance.
4. Optimizes the footprint for even wear and long tread life.
5. Strong carcass materials.
6. Help promote tire durability and provide tire retreadability.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1065	279	22.0	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1065	279	22.0	TRA
11R24.5	14	146/143	L	8.25	2725	720	3000	720	1116	279	22.0	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1116	279	22.0	TRA
295/75R22.5	14	144/141	L	9.00	2575	760	2800	760	1026	298	22.0	TRA
295/75R22.5	16	146/143	L	9.00	2725	830	3000	830	1026	298	22.0	TRA
285/75R24.5	14	144/141	L	8.25	2575	760	2800	760	1062	283	22.0	TRA
285/75R24.5	16	147/144	L	8.25	2800	830	3075	830	1062	283	22.0	TRA



LLF16

Radial Truck And Bus Tire (Long Haul)

Suitable for all position of the buses and the steer and trailer axle of the trucks running on highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	14.5	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	14.5	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	14.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	14.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	14.5	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	14.5	TRA



LLD37

Radial Truck Tire (Long Haul)

1. Suitable for the drive axle of the trucks running on highway.
2. Good braking and grip on wet road.
3. Long life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
10.00R20	16	146/143	K	7.50	2725	830	3000	830	1054	278	20.0	GB
10.00R20	18	149/146	K	7.50	3000	930	3250	930	1054	278	21.0	GB
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1065	279	22.0	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1065	279	22.0	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1065	279	22.0	ETRTO
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1116	279	22.0	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1116	279	22.0	TRA
265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	16.0	ETRTO
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1062	283	22.0	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1062	283	22.0	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1026	298	22.0	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1026	298	22.0	TRA



LTE821

Radial Truck Tire For Highway (Long Haul)

1. Suitable for the trailer axle of trucks running on highway.
1. Excellent straight running performance.
2. Sipes in shoulder offer low noise and strong heat dissipation.
3. Low rolling resistance.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	9.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	9.5	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	9.5	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	9.5	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	9.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	9.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	10.0	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	10.0	TRA



LDL817

Radial Truck Tire (Long Haul)

1. Suitable for the drive axle of the trucks running on highway.
1. Typical block pattern design makes good towing and grip on wet and dry road.
2. Low rolling resistance.
3. Wear-resistance compound, reducing shifting to prevent uneven wear.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
445/50R22.5	18	158	L	14.00	---	---	4250	760	1018	445	20.0	TRA
445/50R22.5	20	161	L	14.00	---	---	4625	830	1018	445	20.0	TRA
445/50R22.5	18	155	L	14.00	---	---	3875	700	1018	445	20.0	ETRT0
445/50R22.5	20	161	L	14.00	---	---	4625	850	1018	445	20.0	ETRT0



LTL811

Radial Truck Tire (Long Haul)

1. Suitable for the trailer axle of trucks running on highway.
2. Low rolling resistance.
3. Wear-resistance compound, reducing shifting to prevent uneven wear.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
445/50R22.5	18	158	L	14.00	---	---	4250	760	1018	445	10.5	TRA
445/50R22.5	20	161	L	14.00	---	---	4625	830	1018	445	10.5	TRA
445/50R22.5	18	155	L	14.00	---	---	3875	700	1018	445	10.5	ETRTO
445/50R22.5	20	161	L	14.00	---	---	4625	850	1018	445	10.5	ETRTO



LLF16e+

Radial Truck And Bus Tire (Long Haul)

1. Suitable for the stree axle of the trucks running on highway.
1. Good handling.
2. Low rolling resistance.
3. Certified by U.S.A SmartWay.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2600	720	1054	279	14.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	14.5	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	14.5	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2600	760	1050	283	14.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	14.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2600	760	1014	298	14.5	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	14.5	TRA



LLD37e+

Radial Truck Tire (Long Haul)

1. Suitable for the drive axle of the trucks running on highway.
2. Good braking and grip on wet road.
3. Long life.
4. Certified by U.S.A SmartWay.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1065	279	17.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1065	279	17.5	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1116	279	22.0	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1116	279	22.0	TRA
295/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1062	283	22.0	TRA
295/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1062	283	22.0	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1026	298	22.0	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1026	298	22.0	TRA



Regional

—



KTD200 New —

Radial Truck Tire (For national and regional transportation)

1. Suitable for drive axle of trucks running on highway, national road , general road
2. Optimization of the shoulder block , improving resistance to shoulder damage
3. Lasting grip and stability , with M+S and 3PMSF marking
4. High wear resistance




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	19.5	ETRTO
315/70R22.5	16	154/150 (152/148)	L(M)	9.00	3350	900	3750	900	1014	312	20.0	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	22.0	ETRTO
315/80R22.5	20	156/150 (154/150)	L(M)	9.00	3350	850	4000	850	1076	312	22.0	ETRTO



KTS300 New —

Radial Truck Tire (For national and regional transportation)

1. Suitable for steer axle of trucks running under an wide range of use, from highway to light unpaved road
2. Optimization of the shoulder block , improving resistance to shoulder damage
3. Lasting grip and stability, with stone rejection design
4. High wear resistance



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
12R22.5	16	152/148	L	9	3150	850	3550	850	1084	300	17.0	ETRTO
385/55R22.5	18	159	K	12.25	—	—	4250	850	996	386	—	ETRTO
385/55R22.5	20	160(158)	K(L)	12.25	—	—	4500	900	996	386	—	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	—	ETRTO
315/60R22.6	18	154/150 (152/148)	L(M)	9.75	3350	900	3750	900	1014	312	—	ETRTO
385/65R22.5	20	160(158)	K(L)	11.75	—	—	4500	900	1072	389	—	ETRTO
385/65R22.5	24	164(158)	K(L)	11.75	—	—	5000	900	1072	389	—	ETRTO
315/70R22.5	16	154/150 (152/148)	L(M)	9	3350	900	3750	900	1014	312	—	ETRTO
315/70R22.5	18	156/150 (154/150)	L(M)	9.00	3350	900	4000	900	1014	312	—	ETRTO
295/80R22.5	16	152/148	M	9	3150	850	3550	850	1044	298	—	ETRTO
295/80R22.5	18	154/149	L	9	3250	850	3750	850	1044	298	—	ETRTO
315/80R22.5	18	154/150	M	9	3350	825	3750	825	1076	312	—	ETRTO
315/80R22.5	20	156/150 (154/150)	L(M)	9	3350	850	4000	850	1076	312	—	ETRTO
315/80R22.5	22	158/150 (154/150)	L(M)	9.00	3350	900	4250	900	1076	312	—	ETRTO



KTD300 New —

Radial Truck Tire (For national and regional transportation)

1. Suitable for drive axle of trucks under an wide range of use, from highway to light unpaved road
2. Optimization of the shoulder block, improving resistance to shoulder damage
3. Lasting grip and stability, with M+S and 3PMSF marking
4. High wear resistance



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	22.0	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	19.5	ETRTO
315/70R22.5	16	154/150 (152/148)	L(M)	9.00	3350	900	3750	900	1014	312	20.0	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	20.5	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	22.0	ETRTO
315/90R22.5	20	156/150 (154/150)	L(M)	9.00	3350	850	4000	850	1076	312	22.0	ETRTO



KTA20 New —

Radial Truck Tire (Regional ALL position)

1. Suitable for all position of trucks using for high traction and high scrub applications.
2. wide, strong shoulder ribs increase tread life
3. Lasting grip and stability
4. High wear resistance



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1054	279	15.1	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	15.1	TRA
11R24.5	14	146/143	L	8.25	2725	720	3000	720	1104	279	15.1	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1104	279	15.1	TRA
285/75R24.5	14	144/141	L	8.25	2575	760	2800	760	1050	283	15.1	TRA
285/75R24.5	16	147/144	L	8.25	2800	830	3075	830	1050	283	15.1	TRA
295/75R22.5	14	144/141	L	9.00	2575	760	2800	760	1014	298	15.1	TRA
295/75R22.5	16	146/143	L	9.00	2725	830	3000	830	1014	298	15.1	TRA



KTD301 New —

Radial Truck Tire (Regional Drive)

1. Suitable for drive of trucks using for high traction and high scrub applications.
2. Open-shoulder design helps deliver long tread life and traction.
3. Tough tread compound with stone rejector platforms in center grooves provide long life.
4. Deep shoulder blocks provide increased traction.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1054	279	22.5	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	22.5	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1054	279	22.5	ETTRO
11R24.5	14	146/143	L	8.25	2725	720	3000	720	1104	279	22.5	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1104	279	22.5	TRA



LFL185 New —

Radial Truck Tire (Regional)

1. Optimization of the shoulder and the proportion of pattern block in the middle.
2. Four straight groove matching S type variable Angle groove design and ensure good steering tyre and self-cleaning properties.
3. Ultra strong skeleton materials applications and Promote tire safety performance.
4. High wear resistance of new formula application and Wear mileage increases more than 20%.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	16.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	16.5	TRA
11R22.5	16	148/145	M	8.25	2900	850	3150	850	1054	279	16.5	ETRTO
12R22.5	16	150/147	M	9.00	3075	830	3350	830	1085	300	17.0	TRA
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	17.0	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
295/80R22.5	16	150/147	M	9.00	3075	830	3350	830	1044	298	17.0	GB
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	17.0	GB
315/80R22.5	18	154/151	M	9.00	3450	830	3750	830	1076	312	17.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	17.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	17.0	ETRTO



LDL186 New —

Radial Truck Tire (Regional)

1. Optimization of the shoulder and the proportion of pattern block in the middle.
2. Classic mahjong block pattern style matching variable Angle groove design and Ensure a strong drive and self-cleaning.
3. Ultra strong skeleton materials applications and Promote tire safety performance.
4. High wear resistance of new formula application and Wear mileage increases more than 20%.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
12R22.5	16	150/147	M	9.00	3075	830	3350	830	1085	300	22.0	TRA
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	22.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	22.0	GB
295/80R22.5	16	152/148	L	9.00	3150	850	3550	850	1044	298	23.0	ETRTO
295/80R22.5	16	150/147	L	9.00	3075	830	3350	830	1044	298	23.0	GB
295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	23.0	GB
315/80R22.5	18	154/151	L	9.00	3450	830	3750	830	1076	312	23.0	GB
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	23.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	23.0	ETRTO



LDL161

New —

Radial Truck Tire (Regional)

1. Optimization of the shoulder and the proportion of pattern block in the middle.
2. Classic mahjong block pattern style matching variable Angle groove design and Ensure a strong drive and self-cleaning.
3. Ultra strong skeleton materials applications and Promote tire safety performance.
4. High wear resistance of new formula application and Wear mileage increases more than 20%.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
10.00R20	16	148/143	K	7.5	2725	830	3000	830	1054	278	20	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	20	GB



LTL812

Radial Truck Tire (Regional)

1. Suitable for drive and steer axle of trucks riding on highway.
2. Long life.
3. Retreadability.
4. Low eccentric wear.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	16.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.0	GB
9R22.5	14	136/134	M	6.75	2120	830	2240	830	974	229	15.0	TRA
10R22.5	14	141/139	L	7.50	2430	790	2575	790	1019	254	17.0	TRA
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	16.0	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	16.0	TRA
11R22.5	16	148/145	M	8.25	2900	850	3150	850	1054	279	16.0	ETRTO
12R22.5	16	150/147	M	9.00	3075	830	3350	830	1085	300	17.0	TRA
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	17.0	GB
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	16.0	ETRTO
275/70R22.5	16	144/141	M	8.25	2575	830	2800	830	958	276	16.0	GB
285/70R19.5	16	140/137	M	8.25	2300	725	2500	725	895	283	16.0	ETRTO
285/70R19.5	18	148/144	M	8.25	2800	900	3000	900	895	283	16.0	ETRTO
285/70R19.5	18	150/148	J	8.25	3150	900	3350	900	895	283	16.0	ETRTO
315/70R22.5	16	154/150 (152/148)	L(M)	9.00	3350	900	3750	900	1014	312	17.0	ETRTO
315/70R22.5	18	156/150 (154/150)	L(M)	9.00	3350	900	4000	900	1014	312	17.0	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
295/80R22.5	16	150/147	M	9.00	3075	830	3350	830	1044	298	17.0	GB
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	17.0	GB
315/80R22.5	18	154/151	M	9.00	3450	830	3750	830	1076	312	17.0	TRA
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	17.0	ETRTO
315/80R22.5	20	156/150	M	9.00	3350	850	4000	850	1076	312	17.0	ETRTO
315/80R22.5	16	152/148	M	9.75	3150	900	3550	900	950	313	17.0	ETRTO



LDL831

Radial Truck Tire (Regional)

1. Suitable for drive axle of trucks riding on highway.

1. Typical block pattern design make good towing and grip on wet and dry road.

2. Strong wear resistance and long life.

3. Retreadability.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	21.0	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	21.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	21.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	21.5	TRA
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	21.5	GB
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1065	279	22.0	ETRTO
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1065	279	22.0	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1065	279	22.0	TRA
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	23.0	ETRTO
12R22.5	16	150/147	M	9.00	3075	830	3350	830	1085	300	23.0	TRA
12R22.5	18	152/149	M	9.00	3250	930	3550	930	1085	300	23.0	GB
315/60R22.5	16	152/148	M	9.75	3150	900	3550	900	950	313	23.0	ETRTO
285/70R19.5	16	140/137	M	8.25	2300	725	2500	725	895	263	19.0	ETRTO
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	263	19.0	ETRTO
285/70R19.5	18	150/148	J	8.25	3150	900	3350	900	895	263	19.0	ETRTO
315/70R22.5	16	154/150 (152/148)	L(M)	9.00	3350	900	3750	900	1014	312	23.0	ETRTO
315/70R22.5	18	156/150 (154/150)	L(M)	9.00	3350	900	4000	900	1014	312	23.0	ETRTO
295/80R22.5	16	152/148	L	9.00	3150	850	3550	850	1044	298	23.0	ETRTO
295/80R22.5	16	150/147	L	9.00	3075	830	3350	830	1044	298	23.0	GB
295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	23.0	GB
315/80R22.5	18	154/151	L	9.00	3450	830	3750	830	1076	312	23.0	TRA
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	23.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	23.0	ETRTO



LDL813

Radial Truck Tire (Regional)

1. Suitable for drive axle of trucks riding on highway.
2. Long life.
3. Good grip performance.
4. Low eccentric wear.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1059	279	20.0	ETRTO
11R22.5	14	144/142	L	8.25	2650	720	2900	720	1059	279	20.0	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1059	279	20.0	TRA
12R22.5	16	150/147	L	9.00	3075	830	3350	830	1085	300	21.0	TRA
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	21.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	21.0	GB
13R22.5	18	156/150	L	9.75	3350	875	4000	875	1124	320	21.0	ETRTO
13R22.5	18	154/151	L	9.75	3450	830	3750	830	1124	320	21.0	GB
315/80R22.5	18	154/151	L	9.00	3450	830	3750	830	1076	312	21.0	TRA
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	21.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	21.0	ETRTO



LTL863

Radial Truck Tire (Regional)

1. Typical combined pattern design offers optimal trailer performance.
2. Low rolling resistance.
3. Wear-resistance compound, reducing shifting to prevent uneven wear.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
385/55R22.5	18	158	K	12.25	---	---	4250	850	996	386	16.5	ETRTO
385/55R22.5	20	160(158)	J(L)	12.25	---	---	4500	900	996	386	16.5	ETRTO
385/65R22.5	18	158	K	11.75	---	---	4250	850	1072	389	16.5	ETRTO
385/65R22.5	20	160(158)	J(L)	11.75	---	---	4500	900	1072	389	16.5	ETRTO
425/65R22.5	18	162	K	12.25	---	---	4750	780	1124	422	17.5	TRA
425/65R22.5	20	165	J/K	13.00	---	---	5150	825	1124	430	17.5	ETRTO
445/65R22.5	20	168	J/K	13.00	---	---	5600	830	1150	444	17.5	TRA
445/65R22.5	20	169	J/K	14.00	---	---	5800	900	1150	454	18.0	ETRTO



LAL836

Radial Truck Tire (Regional)

1. Suitable for all position of trucks running on the high-grade road.
1. Good handling and driving.
2. Long life.
3. Retreadability.
4. Low eccentric wear.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	17.0	TRA
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	17.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	18.5	GB
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	18.5	GB
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	16.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	16.5	TRA
11R22.5	16	148/145	M	8.25	2900	850	3150	850	1054	279	16.5	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	18.0	ETRTO
12R22.5	16	150/147	L	9.00	3075	830	3350	830	1085	300	18.0	TRA
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	18.0	GB
13R22.5	18	156/150	L	9.75	3350	875	4000	875	1124	320	18.0	ETRTO
13R22.5	18	154/151	L	9.75	3450	830	3750	830	1124	320	18.0	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16.0	ETRTO
295/80R22.5	16	150/147	M	9.00	3075	830	3350	830	1044	298	16.0	GB
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	16.0	GB
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	18.0	ETRTO
315/80R22.5	18	154/151	L	9.00	3450	830	3750	830	1076	312	18.0	TRA
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	18.0	ETRTO



LFL827

Radial Truck Tire (Regional)

1. Suitable for drive and steer axle of trucks riding on highway.
2. Retreadability.
3. Low eccentric wear.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11.00R20	16	150/147	L	8.0	3075	830	3350	830	1079	289	14.0	TRA
11.00R20	18	152/149	L	8.0	3250	930	3550	930	1079	289	14.0	GB
12R22.5	16	150/147	M	9.00	3075	830	3350	830	1079	296	13.0	GB
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1079	296	13.0	GB
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1078	296	13.0	ETRTO
385/65R22.5	18	158	K	11.75	—	—	4250	850	1066	385	13.0	ETRTO
385/65R22.5	20	160	J	11.75	—	—	4500	900	1066	385	13.0	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1038	294	14.0	ETRTO
295/80R22.5	16	150/147	M	9.00	3075	830	3350	830	1038	294	14.0	GB
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1038	294	14.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1070	308	13.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1070	308	13.0	ETRTO
315/80R22.5	18	154/151	M	9.00	3450	830	3750	830	1070	308	13.0	TRA



LDL829

Radial Truck Tire (Regional)

1. Suitable for drive axle of trucks riding on highway.
2. Typical block pattern design makes good towing and grip on wet and dry road.
3. good drainage.
4. Good wet traction.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
10.00R20	16	146/143	K	7.5	2725	830	3000	830	1048	274	16.0	GB
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1048	274	16.0	GB
11.00R20	16	150/147	L	8.0	3075	830	3350	830	1079	289	17.0	TRA
11.00R20	18	152/149	L	8.0	3250	930	3550	930	1079	289	17.0	GB
12.00R20	18	154/151	L	8.5	3450	830	3750	830	1119	311	15.5	TRA
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1119	311	15.5	GB
12R22.5	16	150/147	L	9.00	3075	830	3350	830	1079	296	15.0	GB
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1079	296	15.0	GB
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1078	296	15.0	ETRTO
13R22.5	16	154/150	L	9.75	3350	850	3750	850	1118	316	15.0	ETRTO
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1118	316	15.0	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1038	294	15.5	ETRTO
295/80R22.5	16	150/147	M	9.00	3075	830	3350	830	1038	294	15.5	GB
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1038	294	15.5	GB
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1070	308	16.0	ETRTO
315/80R22.5	18	154/151	L	9.00	3450	830	3750	830	1070	308	16.0	GB
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1070	308	16.0	ETRTO



LLF76

Radial Truck And Bus Tire (Regional)

Suitable for all position of buses and medium trucks running on the high-grade road



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
8R22.5	12	128/126	M	6.00	1700	760	1800	760	935	203	13.0	GB
8R22.5	14	130/128	M	6.00	1800	830	1900	830	935	203	13.0	GB



LLF56+

Radial Truck Tire (Regional)

Suitable for all position of light and medium trucks running on highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9R22.5	12	133/131	M	6.75	1950	720	2060	720	974	229	13.5	TRA
9R22.5	14	136/134	M	6.75	2120	830	2240	830	974	229	13.5	TRA
10R22.5	14	141/139	M	7.50	2430	790	2575	790	1019	254	14.0	TRA
10R22.5	14	144/142	L	7.50	2650	850	2800	850	1020	254	14.0	ETRTO



LLF06

Radial Truck Tire (Regional)

1. Suitable for all position of the buses and the steer and trailer axle of the trucks running on highway.
2. Low rolling resistance.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.00R20	14	141/139	L	7.0	2430	790	2575	790	1019	259	14.0	TRA
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	14.0	GB
10.00R20	16	146/143	L	7.5	2725	830	3000	830	1054	278	14.5	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	14.5	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	15.5	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	15.5	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	15.5	TRA
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	14.5	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	14.5	ETRTO



LLF02

Radial Truck Tire (Regional)

1. Suitable for steer axle of the trucks running on highway.
1. Special for trucks of different tonnages which run on highway.
2. Stable and safe when run on wet and slippery road.
3. Low fuel consumption.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
12R22.5	16	150/147	L	9.00	3075	830	3350	830	1085	300	14.5	TRA
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	14.5	ETRTO
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	16.5	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	14.5	ETRTO
295/80R22.5	16	150/147	M	9.00	3075	830	3350	830	1044	298	14.5	GB
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	14.5	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	14.5	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	14.5	ETRTO



F860

Radial Truck Tire (Regional)

1. Special design for all position of buses and steer and trailer axle of trucks.
2. Good side-wear resistance.
3. High-speed performance.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
10.00R20	16	146/143	L	7.5	2725	830	3000	830	1054	278	14.5	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	14.5	GB
11.00R20	16	150/147	L	8.0	3075	830	3350	830	1085	293	15.5	GB
11.00R20	18	152/149	L	8.0	3250	930	3550	930	1085	293	15.5	GB
12.00R20	18	154/151	L	8.5	3450	830	3750	830	1125	315	15.5	TRA
11.00R22	16	152/149	K	8.0	3250	830	3550	830	1135	293	14.5	TRA
11.00R22	18	154/151	K	8.0	3450	930	3750	930	1135	293	14.5	GB
305/75R24.5	16	154/149	L	9.00	3250	850	3750	850	1080	305	14.5	ETRTO
305/75R24.5	14	152/148	L	9.00	3150	800	3550	800	1080	305	14.5	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16.0	ETRTO
295/80R22.5	16	150/147	M	9.00	3075	830	3350	830	1044	298	16.0	GB



LLF01

Radial Truck Tire (Regional)

1. Special for trucks of different tonnages which run on highway.
2. Stable and safe when running on wet and slippery road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
295/60R22.5	16	149/146	M	9.00	3000	900	3250	900	926	292	14.5	ETRTO
315/60R22.5	16	152/148	M	9.75	3150	900	3550	900	950	313	14.5	ETRTO
275/80R22.5	16	148/146	M	8.25	3000	850	3250	850	1012	276	14.5	ETRTO



LLD27

Radial Truck Tire (Regional)

1. Suitable for the drive axle of the trucks running on highway.
2. Good braking and grip on wet road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	16.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	16.5	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1054	279	16.5	ETRTO
12R22.5	16	150/147	M	9.00	3075	830	3350	830	1055	300	17.5	GB
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	17.5	ETRTO



D905

Radial Truck Tire (Regional)

1. Typical block pattern design suitable for drive axle of trucks running on highway.
2. Good braking and grip on wet road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	20.0	ETRTO
12R22.5	16	150/147	L	9.00	3075	830	3350	830	1085	300	20.0	GB
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	968	276	17.5	ETRTO
275/70R22.5	16	144/141	M	8.25	2575	830	2800	830	968	276	17.5	GB
285/70R19.5	16	140/137	M	8.25	2300	725	2500	725	895	283	16.0	ETRTO
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	16.0	ETRTO
285/70R19.5	18	150/148	J	8.25	3150	900	3350	900	895	283	16.0	ETRTO
315/70R22.5	14	152/148	M	9.00	3150	850	3550	850	1014	312	17.5	ETRTO
315/70R22.5	16	154/150	M	9.00	3350	900	3750	900	1014	312	17.5	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.5	ETRTO
295/80R22.5	16	150/147	M	9.00	3075	830	3350	830	1044	298	17.5	GB



D915

Radial Truck Tire (Regional)

1. Typical block pattern design suitable for drive axle of truck running on highway.
2. Good handling and driving.
3. Long life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
295/60R22.5	16	149/146	M	9.00	3000	900	3250	900	926	292	17.5	ETRTO
315/60R22.5	16	152/148	M	9.75	3150	900	3550	900	950	313	19.5	ETRTO



D930

Radial Truck Tire (Regional)

1. Drive axle for highway.
2. Deep and rigid block design for good traction.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11.00R22	16	152/149	K	8.00	3250	830	3550	830	1135	293	19.5	TRA
305/75R24.5	14	152/148	L	9.00	3150	800	3550	800	1080	305	19.5	ETRTO
305/75R24.5	16	154/149	L	9.00	3250	850	3750	850	1080	305	19.5	ETRTO



LLA18

Radial Truck Tire (Regional)

1. Suitable for trucks of different tonnages which run on highway.
2. Low fuel consumption.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
385/65R22.5	18	158	K	11.75	---	---	4250	850	1072	389	16.5	ETRTO
385/65R22.5	20	160	J	11.75	---	---	4500	900	1072	389	16.5	ETRTO



LLA28

Radial Truck Tire (Regional)

1. Suitable for trucks of different tonnages which run on highway.
2. Low fuel consumption.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
425/65R22.5	18	162	K	12.25	---	---	4750	760	1124	422	17.5	TRA
425/65R22.5	20	165	J/K	13.00	---	---	5150	825	1124	430	17.5	ETRTO



LAL800

Radial Truck Tire (Regional)

- 1.Suitable for all position of trucks running on the high-grade road.
- 2.Good handling and driving.
- 3.Long life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
8.25R20	12	133/131	L	6.5	1950	720	2060	720	974	236	12.0	GB
8.25R20	14	136/134	L	6.5	2120	830	2240	830	974	236	12.0	GB
8.25R20	16	139/137	L	6.5	2300	930	2430	930	974	236	12.0	GB
11.00R20	16	150/147	L	8.0	3075	830	3350	830	1085	293	16.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.0	TRA
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1054	279	16.0	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	16.0	TRA
11R22.5	18	148/145	L	8.25	2900	850	3150	850	1054	279	16.0	ETRTO
12R22.5	16	150/147	L	9.00	2900	850	3150	850	1054	279	16.0	TRA
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	16.0	ETRTO
12R22.5	18	152/149	K	9.00	3150	850	3550	850	1084	300	16.0	GB
315/80R22.5	18	154/151	M	9.00	3450	830	3750	830	1076	312	16.0	GB
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	16.0	ETRTO
315/80R22.5	20	156/150	M	9.00	3350	850	4000	850	1076	312	16.0	ETRTO



C600

Radial Truck And BusTire (Long Haul)

- 1.Suitable for all position of trucks running on the high-grade road.
- 2.High-speed performance.
- 3.Low fuel consumption.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9R22.5	14	136/134	M	6.75	2120	830	2240	830	974	229	15	TRA
10R22.5	14	144/142	L	7.50	2650	850	2900	850	1020	254	15	ETRTO
11R22.5	14	144/142	M	8.25	2650	720	2900	720	1054	279	16	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	16	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1054	279	16	ETRTO
12R22.5	16	150/147	M	9.00	3075	830	3350	830	1055	300	16	GB
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	16	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16	ETRTO
295/80R22.5	16	150/147	M	9.00	3075	830	3350	830	1044	298	16	GB



F816

Radial Truck Tire (Regional)

- 1.Special design for steer axle of trucks.
- 2.Good handling.
- 3.Low rolling resistance.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	14.5	GB
10.00R20	16	146/143	L	7.5	2725	830	3000	830	1054	278	15.5	TRA
11.00R20	16	150/147	L	8.0	3075	830	3350	830	1085	293	15.5	GB
11.00R20	18	152/149	L	8.0	3250	930	3550	930	1085	293	15.5	GB
12.00R20	18	154/151	L	8.5	3450	830	3750	830	1125	315	15.5	TRA
11R22.5	14	144/142	M	8.25	2650	720	2900	720	1054	279	14.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
11R22.5	16	148/145	M	8.25	2900	850	3150	850	1054	279	14.5	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	16.0	ETRTO
12R22.5	16	150/147	M	9.00	3075	830	3350	830	1085	300	16.0	GB
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	16.0	GB
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	14.5	TRA
11R24.5	16	148/146	M	8.25	3000	830	3250	830	1104	279	14.5	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2900	760	1050	283	14.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	14.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2900	760	1014	298	14.5	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	14.5	TRA



D928

Radial Truck Tire (Regional)

1. Typical block pattern design suitable for drive axle of trucks running on highway.
2. Good braking and grip on the road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	17.5	GB
10.00R20	16	146/143	L	7.5	2725	830	3000	830	1054	278	20.0	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	20.0	GB
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1059	279	20.5	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1059	279	20.5	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1059	279	20.5	ETRTO
11R24.5	14	146/143	L	8.25	2725	720	3000	720	1110	279	20.5	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1110	279	20.5	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1056	283	20.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1056	283	20.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1020	296	20.5	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1020	296	20.5	TRA



T810

Radial Truck Tire (Regional)

Suitable for all position of the buses and trailer axle of the trucks running on highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	10.75	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	10.75	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	10.75	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	10.75	TRA
255/70R22.5	16	140/137	M	7.50	2300	830	2500	830	930	255	10.75	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	10.75	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	10.75	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	296	10.75	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	296	10.75	TRA



F816e+

Radial Truck Tire (Regional)

1. Special design for steer axle of trucks.
2. Good handling.
3. Low rolling resistance.
4. Certified by U.S.A SmartWay.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	14.5	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	14.5	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	14.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	14.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	14.5	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	14.5	TRA



LLF02e+

Radial Truck Tire (Regional)

1. Special for trucks of different tonnages which run on highway.
2. Stable and safe when run on wet and slippery road.
3. Certified by U.S.A SmartWay.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
315/80R22.5	18	154/151	M	9.00	3450	830	3750	830	1076	312	14.5	TRA
315/80R22.5	20	157/154	L	9.00	3750	900	4125	900	1076	312	14.5	TRA



T810e+

Radial Truck Tire (Regional)

Suitable for all position of the buses and trailer axle of the trucks running on highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1050	279	10	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1050	279	10	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	10.75	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	10.75	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	10	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	10	TRA



LLA18e+

Radial Truck Tire (Regional)

1. Suitable for trucks of different tonnages which run on highway.
2. Certified by U.S.A SmartWay.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
385/65R22.5	18	158	K	11.75	---	---	4250	830	1072	389	16.5	TRA



LAL800e+

Radial Truck Tire (Regional)

1. Good handling and driving.
2. Long life.
3. Certified by U.S.A SamrtWay.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1054	279	16.0	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	16.0	TRA



F820

Radial Truck Tire (Regional)

Suitable for all position of buses and the steer and trailer axle of trucks running on the highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
8.5R17.5	12	121/120	M	6.00	1400	625	1450	625	802	215	13.0	ETRTO
225/70R19.5	12	125/123	M	6.75	1550	660	1650	660	811	226	12.5	TRA
225/70R19.5	14	128/126	M	6.75	1700	760	1800	760	811	226	12.5	TRA
245/70R19.5	12	129/127	M	7.50	1750	660	1850	660	839	248	13.0	TRA
245/70R19.5	14	133/131	M	7.50	1950	760	2060	760	839	248	13.0	TRA
245/70R19.5	14	133/131	M	7.50	1950	750	2060	750	839	248	13.0	ETRTO
245/70R19.5	16	136/134	M	7.50	2120	825	2240	825	839	248	13.0	ETRTO
245/70R19.5	16	136/134	L	7.50	2120	825	2240	825	839	248	13.0	ETRTO
265/70R19.5	14	136/134	M	7.50	2120	725	2240	725	867	262	13.5	ETRTO
265/70R19.5	16	140/138	L	7.50	2360	775	2500	775	867	262	13.5	ETRTO
265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	13.5	ETRTO
285/70R19.5	16	144/142	M	8.25	2650	800	2900	800	895	283	14.0	
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	14.0	ETRTO
285/70R19.5	18	150/147	J	8.25	3075	900	3350	900	895	283	14.0	
255/70R22.5	14	136/133	M	7.50	2060	700	2240	700	930	255	14.0	ETRTO
255/70R22.5	16	140/137	M	7.50	2300	830	2500	830	930	255	14.0	TRA
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	14.5	ETRTO
275/70R22.5	16	144/141	M	8.25	2575	830	2900	830	958	276	14.5	GB
205/75R17.5	14	124/122	M	6.00	1500	750	1600	750	753	205	12.5	ETRTO

On&Off Road

—





KMA400 New —

Radial Truck Tire (On&Off Road)

1. Suitable for all position axle of trucks under all kinds of working conditions.
2. Thick sidewall design protect against sidewall impacts and bruises.
3. Stone rejection design protect groove bottom from stone puncture
4. Lasting grip and stability ,with M+S and 3PMSF marking



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	19.0	ETRTO
13R22.5	20	158/156	K	9.75	4000	900	4250	900	1124	320	19.0	ETRTO
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	19.0	ETRTO
295/80R22.5	18	154/149	K	9.00	3250	850	3750	850	1044	298	19.0	ETRTO
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	19.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	19.0	ETRTO
315/80R22.5	22	158/150	K	9.00	3350	900	4250	900	1076	312	19.0	ETRTO



KMD400 New —

Radial Truck Tire (On&Off Road)

1. Suitable for drive axle of trucks under all kinds of working conditions.
2. Thick sidewall design protect against sidewall impacts and bruises.
3. Stone rejection design protect groove bottom from stone puncture
4. Lasting grip and stability ,with M+S and 3PMSF marking



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	21.0	ETRTO
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	21.0	ETRTO
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1082	312	21.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1082	312	21.0	ETRTO



KMD402 New —

Radial Truck Tire (On&Off Road)

1. Suitable for drive axle of trucks under all kinds of working conditions.
2. Thick sidewall design protect against sidewall impacts and bruises.
3. Stone rejection design protect groove bottom from stone puncture
4. Lasting grip and stability ,with M+S.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
10.00R20	16	146/143	K	7.5	2725	830	3000	830	1054	278	20	TRA
10.00R20	18	148/146	K	7.5	3000	930	3250	930	1054	278	20	GB
10.00R20	20	151/148	K	7.5	3150	970	3450	970	1054	278	20	GB
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	22.5	ETRTO
315/80R22.5	18	154/151	L	9.00	3450	830	3750	830	1076	312	22.5	GB
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	22.5	ETRTO



KXA400 New —

Radial Truck Tire (On&Off Road)

- 1.Suitable for trailer and steer axle of trucks under all kinds of working conditions.
- 2.Thick sidewall design protect against sidewall impacts and bruises.
- 3.Stone rejection design protect groove bottom from stone puncture
- 4.Lasting grip and stability ,with M+S and 3PMSF marking



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
385/65R22.5	18	158	L	11.75	—	—	4250	850	1072	389	18.0	ETRTO
385/65R22.5	20	160(158)	K(L)	11.75	—	—	4500	900	1072	389	18.0	ETRTO
425/65R22.5	20	165	K	13.00	—	—	5150	825	1124	430	18.5	ETRTO



KMA40 New —

Radial Truck Tire (On&Off Road)

- 1.Suitable for drive axle of trucks under all kinds of working conditions.
- 2.Chip,cut and abrasion resistance tread compound.
- 3.Stone rejection design protect groove bottom from stone puncture
- 4.Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	18.3	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1104	279	18.3	TRA



LLA98 New —

Radial Truck Tire (On&Off Road)

- 1.Suitable for steer axle of trucks.
- 2.pattern block design reduce shoulder heat.
- 3.Wide running surface and higher saturation design improve the wear mileage.
- 4.Powerful traction,grip and climbing performance.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	15.5	ETRTO
12.00R24	18	158/155	K	8.5	3875	830	4250	830	1235	310	15.5	GB
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	15.5	ETRTO
12.00R24	20	160/157	K	8.5	4125	900	4500	900	1235	310	15.5	GB



LAR919

Radial Truck Tire (On&Off Road)

- 1.Suitable for steer axle of trucks.
- 2.pattern block design reduce shoulder heat.
- 3.Wide running surface and higher saturation design improve the wear mileage.
- 4.Powerful traction,grip and climbing performance.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	16.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	16.0	GB
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	16.0	GB
11R22.5	16	148/145	M	8.25	2900	850	3150	850	1054	279	19.0	ETRTO
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	18.0	ETRTO
295/80R22.5	16	150/147	K	9.00	3075	830	3350	830	1044	298	18.0	GB
295/80R22.5	18	152/149	K	9.00	3250	900	3550	900	1044	298	18.0	GB
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1082	312	20.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1082	312	20.0	ETRTO



LDR988

Radial Truck Tire (On&Off Road)

- 1.Suitable for drive axle of trucks.
- 2.Larger outline and wider tread increases mileage and service life.
- 3.STRONG-MAX structure design.can load more.
- 4.Suitable for driver axle of dump.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	19.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	19.0	GB
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	19.0	GB



LDR978

Radial Truck Tire (On&Off Road)

1. Suitable for drive axle of trucks.
2. Good traction.
3. Chip, cut and abrasion resistance tread compound.
4. Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	16.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	16.0	GB
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	16.0	GB
12R22.5	16	150/147	K	9.00	3075	830	3350	830	1085	300	20.5	GB
12R22.5	16	152/148	K	9.00	3150	850	3550	850	1084	300	20.5	ETRTO
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	20.5	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	21.0	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1082	312	21.0	ETRTO
315/80R22.5	20	156/150 (154/150)	L(M)	9.00	3350	850	4000	850	1082	312	21.0	ETRTO





LLA08

Radial Truck Tire (On&Off Road)

1. Typical combined pattern.
2. Suitable for trucks of different tonnages which run on highway and normal road.
3. Strong wear resistance, low heat generation.
4. Good handling.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.50R20	12	128/126	L	6.00	1700	760	1800	760	935	215	13.5	GB
7.50R20	14	130/128	K	6.00	1800	830	1900	830	935	215	13.5	GB
8.25R20	12	133/131	L	6.50	1950	720	2060	720	974	236	15.5	GB
8.25R20	14	136/134	L	6.50	2120	830	2240	830	974	236	15.5	GB
8.25R20	16	139/137	L	6.50	2300	930	2430	930	974	236	15.5	GB
9.00R20	14	141/139	K	7.00	2430	790	2575	790	1019	259	15.0	TRA
9.00R20	16	144/142	K	7.00	2650	900	2800	900	1019	259	15.0	GB
10.00R20	16	146/143	K	7.50	2725	830	3000	830	1054	278	15.5	TRA
10.00R20	18	149/146	K	7.50	3000	930	3250	930	1054	278	15.5	GB
11.00R20	16	150/147	K	8.00	3075	830	3350	830	1065	293	16.5	GB
11.00R20	18	152/149	K	8.00	3250	930	3550	930	1065	293	16.5	GB
12.00R20	18	154/151	K	8.50	3450	830	3750	830	1125	315	17.0	TRA
12.00R24	18	156/153	K	8.50	3650	775	4000	775	1226	313	17.0	ETRTO
12.00R24	20	160/156	K	8.50	4000	850	4500	850	1226	313	17.0	ETRTO
11R22.5	14	144/142	K	8.25	2650	720	2800	720	1054	279	15.5	TRA
11R22.5	16	146/143	K	8.25	2725	830	3000	830	1054	279	15.5	TRA
11R22.5	16	148/145	K	8.25	2900	850	3150	850	1054	279	15.5	ETRTO
12R22.5	16	152/148	K	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
11R24.5	14	148/143	K	8.25	2725	720	3000	720	1104	279	15.5	TRA
11R24.5	16	149/146	K	8.25	3000	830	3250	830	1104	279	15.5	TRA
12R24.5	16	152/149	K	9.00	3250	830	2550	830	1135	300	16.0	TRA
12R24.5	18	154/151	K	9.00	3450	930	3750	930	1135	300	16.0	GB
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	16.0	ETRTO
295/80R22.5	16	150/147	K	9.00	3075	830	3350	830	1044	298	16.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	17.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	17.0	ETRTO



LLA01

Radial Truck Tire (On&Off Road)

1. Typical combined pattern.
2. Suitable for trucks of different tonnages which run on highway and normal road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.00R20	14	141/139	K	7.0	2430	790	2575	790	1019	259	15.5	TRA
9.00R20	16	144/142	K	7.0	2650	900	2900	900	1019	259	15.5	GB
10.00R20	16	146/143	K	7.5	2725	830	3000	830	1054	278	17.0	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	17.0	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	17.5	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	17.5	GB
13R22.5	18	156/150	K	9.8	3350	875	4000	875	1124	320	17.5	ETRTO



LDR939

Radial Truck Tire (On&Off Road)

1. Suitable for drive axle of trucks.
2. Transverse pattern block design reduces shoulder heat.
3. Wide running surface and higher saturation design improve the wear mileage.
4. Powerful traction, grip and climbing ability.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	20.5	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	20.5	GB
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	20.5	GB



LLD09

Radial Truck Tire (On&Off Road)

1. Suitable for on/off road conditions.
2. It is also suitable for trucks running with high speed on highway for short distance.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
8.25R20	12	133/131	L	6.5	1950	720	2060	720	974	236	14.5	GB
8.25R20	14	136/134	L	6.5	2120	830	2240	830	974	236	14.5	GB
8.25R20	16	139/137	L	6.5	2300	930	2430	930	974	236	14.5	GB
9.00R20	14	141/139	K	7.0	2430	790	2575	790	1019	259	15.5	TRA
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	15.5	GB
10.00R20	16	146/143	K	7.5	2725	830	3000	830	1054	278	16.0	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	16.0	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	17.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	17.0	GB





D960

Radial Truck Tire (On&Off Road)

1. Drive axle for on/off road conditions.
2. Deep and rigid block design for long life and good traction.
3. Cut resistance compound.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.5R17.5	14	129/127	K	6.75	1750	750	1850	750	842	240	16.0	ETRTO
9.5R17.5	18	143/141	K	6.75	2575	875	2725	875	842	240	16.0	ETRTO
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	21.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	21.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	21.0	TRA
12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	21.0	ETRTO
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	21.0	ETRTO
12R22.5	16	150/147	K	9.00	3075	830	3350	830	1085	300	21.0	GB
12R22.5	16	152/148	K	9.00	3150	850	3550	850	1084	300	21.0	ETRTO
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	21.0	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	21.0	ETRTO
265/70R19.5	16	140/138	K	7.50	2360	775	2500	775	867	262	15.5	ETRTO
265/70R19.5	18	143/141	K	7.50	2575	850	2725	850	867	262	15.5	ETRTO
275/70R22.5	16	148/145	K	8.25	2900	900	3150	900	958	276	21.0	ETRTO
275/70R22.5	16	144/141	K	8.25	2575	830	2800	830	958	276	21.0	GB
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	22.0	ETRTO
295/80R22.5	18	152/149	K	9.00	3250	900	3550	900	1044	298	22.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	21.0	ETRTO
315/80R22.5	20	156/150 (154/150)	L(M)	9.00	3350	850	4000	850	1082	312	21.0	ETRTO



A968/LTR968*

Radial Truck Tire (On&Off Road)

1. Typical combined pattern design suitable for all position of trucks on normal grade road.
2. Good braking and grip on wet road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
10.00R15TR	12	133/131	M	7.50	1950	620	2060	620	927	278	17.5	TRA
10.00R15TR	14	137/135	L	7.50	2180	720	2300	720	927	278	17.5	TRA
10.00R15TR	16	141/139	K	7.50	2430	830	2575	830	927	278	17.5	TRA
11R17.5	12	133/131	M	8.25	1950	620	2060	620	927	279	17.5	TRA
11R17.5	14	137/135	L	8.25	2180	720	2300	720	927	279	17.5	TRA
11R17.5	16	141/139	K	8.25	2430	830	2575	830	927	279	17.5	TRA
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1054	279	17.5	TRA
11R22.5	16	148/143	K	8.25	2725	830	3000	830	1054	279	17.5	TRA
11R22.5	16	148/145	K	8.25	2900	850	3150	850	1054	279	17.5	ETRTO
11R24.5	14	146/143	L	8.25	2725	720	3000	720	1104	279	17.5	TRA
11R24.5	16	149/146	K	8.25	3000	830	3250	830	1104	279	17.5	TRA
275/70R22.5*	16	148/145	K	8.25	2900	900	3150	900	958	276	17	ETRTO



LLA38

Radial Truck Tire (On&Off Road)

1. Suitable for the drive and trailer axle of the heavy-duty trucks.
2. Strong wear resistance.
3. Good braking and grip.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
385/55R22.5	18	158	L	12.25	---	---	4250	850	996	386	16.5	ETRTO
385/55R22.5	20	160	J	12.25	---	---	4500	900	996	386	16.5	ETRTO
385/65R22.5	18	158	K	11.75	---	---	4250	850	1072	389	16.5	ETRTO
385/65R22.5	20	160	J	11.75	---	---	4500	900	1072	389	16.5	ETRTO
425/65R22.5	18	162	K	12.25	---	---	4750	760	1124	422	17.5	TRA
425/65R22.5	20	165	J/K	13.00	---	---	5150	825	1124	430	17.5	ETRTO
445/65R22.5	20	168	J/K	13.00	---	---	5600	830	1150	444	18.0	TRA
445/65R22.5	20	169	J	14.00	---	---	5600	900	1150	454	18.0	ETRTO



LLA08e+

Radial Truck Tire (On&Off Road)

1. Typical combined pattern.
2. Suitable for trucks of different tonnages which run on highway and normal road.
3. Good handling.
4. Certified by U.S.A SmartWay.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	16	146/143	K	8.25	2725	830	3000	830	1054	279	15.5	TRA



LDM991

Radial Truck Tire (Short Haul)

Suitable for off road conditions.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
14.00R20	18	160/157	F	10.00W	4125	700	4500	700	1238	370	19.5	ETRTO
14.00R20	20	164/160	F	10.00W	4500	750	5000	750	1238	370	19.5	ETRTO

Off Road





LDO998

Radial Truck Tire (Off Road)

1. Good traction resistance.
2. Chip out and abrasion resistance tread compound.
3. Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11.00R20	18	152/149	F	8.0	3250	930	3550	930	1096	293	24.5	GB
12.00R20	18	154/151	F	8.5	3450	830	3750	830	1136	315	24.5	GB
12.00R20	20	156/153	F	8.5	3650	900	4000	900	1136	315	24.5	GB



LDO986

Radial Truck Tire (Off Road)

1. Good traction resistance.
2. Chip out and abrasion resistance tread compound.
3. Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
12.00R20	18	154/151	F	8.50	3450	830	3750	830	1136	315	24.5	GB
12.00R20	20	156/153	F	8.50	3650	900	4000	900	1136	315	24.5	GB
11R22.5	14	144/142	F	8.25	2650	720	2800	720	1065	279	24.0	TRA
11R22.5	16	146/143	F	8.25	2725	830	3000	830	1065	279	24.0	TRA
11R22.5	16	148/145	F	8.25	2900	850	3150	850	1065	279	24.0	ETRTO
12R22.5	16	150/147	F	9.00	3075	830	3350	830	1085	300	24.0	GB
12R22.5	16	152/148	F	9.00	3150	850	3550	850	1084	300	24.0	ETRTO
13R22.5	18	156/150	F	9.75	3350	875	4000	875	1124	320	24.0	ETRTO
13R22.5	18	154/151	F	9.75	3450	830	3750	830	1124	320	24.0	GB
11R24.5	14	146/143	F	8.25	2725	720	3000	720	1116	279	24.0	TRA
11R24.5	16	149/146	F	8.25	3000	830	3250	830	1116	279	24.0	TRA
295/80R22.5	16	152/148	F	9.00	3150	850	3550	850	1044	298	24.5	ETRTO
295/80R22.5	16	150/147	F	9.00	3075	830	3350	830	1044	298	24.5	GB
295/80R22.5	18	152/149	F	9.00	3250	900	3550	900	1044	298	24.5	GB
315/80R22.5	18	154/150	F	9.00	3350	825	3750	825	1076	312	24.0	ETRTO
315/80R22.5	20	156/150	F	9.00	3350	850	4000	850	1076	312	24.0	ETRTO



LDO983

Radial Truck Tire (Off Road)

1. Good traction resistance.
2. Chip, cut and abrasion resistance tread compound.
3. Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.00R20	16	144/142	F	7.0	2650	900	2800	900	1030	259	23.5	GB
10.00R20	18	149/146	F	7.5	3000	930	3250	930	1065	278	24.0	GB
11.00R20	18	152/149	F	8.0	3250	930	3550	930	1096	293	24.0	GB
12.00R20	18	154/151	F	8.5	3450	830	3750	830	1136	315	24.0	GB
12.00R20	20	156/153	F	8.5	3650	900	4000	900	1136	315	24.0	GB
12.00R24	18	156/153	F	8.5	3650	775	4000	775	1226	313	24.0	ETRTO
12.00R24	20	160/156	F	8.5	4000	850	4500	850	1226	313	24.0	ETRTO
295/80R22.5	16	152/148	F	9.00	3150	850	3550	850	1044	298	22.0	ETRTO
295/80R22.5	16	150/147	F	9.00	3075	830	3350	830	1044	298	22.0	GB
295/80R22.5	18	152/149	F	9.00	3250	900	3550	900	1044	298	22.0	GB



LDO993

Radial Truck Tire (Off Road)

1. Good traction resistance.
2. Chip, cut and abrasion resistance tread compound.
3. Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.00R20	16	144/142	F	7.0	2650	900	2800	900	1019	259	24.5	GB
10.00R20	18	149/146	F	7.5	3000	930	3250	930	1054	278	24.5	GB
11.00R20	18	152/149	F	8.0	3250	930	3550	930	1085	293	24.5	GB
12.00R20	18	154/151	F	8.5	3450	830	3750	830	1125	315	24.5	GB
12.00R20	20	156/153	F	8.5	3650	900	4000	900	1125	315	24.5	GB



LDO912

Radial Truck Tire (Off Road)

1. Transversal pattern block and wide pattern groove offer better driving performance, wet grip, climbing and self-cleaning ability on mud ground.
2. Large-angle groove design with stone ejector minimizes stone retention to protect base compound.
3. Reinforced bead enhances load capability.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11.00R20	18	152/149	F	8.0	3250	930	3550	930	1096	293	22	GB
11R22.5	16	146/145	J	8.25	2900	850	3150	850	1059	279	20	ETRTO
275/80R22.5	16	149/146	J	8.25	3000	850	3250	850	1012	276	20.0	ETRTO
295/80R22.5	16	152/148	F	9.00	3150	850	3550	850	1044	298	20.0	ETRTO
295/80R22.5	16	150/147	F	9.00	3075	830	3350	830	1044	298	20.0	GB



LLD10

Radial Truck Tire (Off Road)

1. Suitable for off road conditions.
2. Cut resistance compound.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9.00R20	14	141/139	F	7.0	2430	790	2575	790	1019	259	20.0	TRA
9.00R20	16	144/142	F	7.0	2650	900	2800	900	1019	259	20.0	GB
10.00R20	16	146/143	J	7.5	2725	830	3000	830	1054	278	20.0	TRA
10.00R20	18	149/146	J	7.5	3000	930	3250	930	1054	278	20.0	GB
11.00R20	16	150/147	F	8.0	3075	830	3350	830	1085	293	20.0	GB
11.00R20	18	152/149	F	8.0	3250	930	3550	930	1085	293	20.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	21.0	TRA
13R22.5	18	156/150	F	9.75	3350	875	4000	875	1124	320	20.0	ETRTO
13R22.5	18	154/151	K	9.75	3450	830	3750	830	1124	320	20.0	GB

Coach&Urban





LAU609

Radial Bus Tire (Urban)

1. Enhanced sidewall ensures high safety.
2. Tire strength is increased by 35% with application of ST steel cord.
3. Tire bead cracking is prevented with application fiber layer in bead area.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	J	8.25	2650	720	2800	720	1054	279	21	GB
11R22.5	16	146/143	J	8.25	2725	830	3000	830	1054	279	21	GB
11R22.5	16	148/145	J	8.25	2900	850	3150	850	1050	279	21	ETRTO
275/70R22.5	16	148/145 (152/148)	J(E)	8.25	2900	900	3150	900	958	276	21	ETRTO
275/70R22.5	16	144/141	J	8.25	2575	830	2800	830	958	276	21	GB



LAU608

Radial Bus Tire (Coach)

1. Enhanced sidewall ensures high safety.
2. Tire strength is increased by 35% with application of ST steel cord.
3. Good wet traction.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9R22.5	14	138/134	M	6.75	2120	830	2240	830	974	229	14.5	TRA
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
295/80R22.5	16	150/147	M	9.00	3075	830	3350	830	1044	298	17.0	GB
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	17.0	GB



U801

Radial Bus Tire (Urban)

1. High safety and long life.
2. Good wet traction.
3. Typical used for urban bus.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	J	8.25	2850	720	2800	720	1059	279	20.0	TRA
11R22.5	16	146/143	J	8.25	2725	830	3000	830	1059	279	20.0	TRA
11R22.5	16	148/145	J	8.25	2900	850	3150	850	1059	279	20.0	ETRTO
275/70R22.5	16	148/145 (152/148)	J(E)	8.25	2900	900	3150	900	958	276	19.5	ETRTO
275/70R22.5	16	144/141	J	8.25	2575	830	2800	830	958	276	19.5	GB
305/70R22.5	16	152/148 (154/150)	J(E)	9.00	3150	900	3550	900	1000	305	20.0	ETRTO
295/80R22.5	16	152/148 (154/150)	J(E)	9.00	3150	900	3550	900	1044	298	20.0	ETRTO
295/80R22.5	16	150/147	J	9.00	3075	830	3350	830	1044	298	20.0	GB
295/80R22.5	18	152/149	J	9.00	3250	900	3550	900	1044	298	20.0	GB





LAU802

Radial Bus Tire (Urban)

- 1.Enhanced sidewall ensures high safety.
- 2.Long service life.
3. Typical used for urban bus.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	F	8.25	2650	720	2900	720	1059	279	20.0	TRA
11R22.5	16	146/143	F	8.25	2725	830	3000	830	1059	279	20.0	TRA
11R22.5	16	148/145	J	8.25	2900	850	3150	850	1059	279	20.0	ETRTO
255/70R22.5	16	140/137	J	7.50	2300	800	2500	800	1059	255	19.0	ETRTO
275/70R22.5	16	148/145 (152/148)	J(E)	8.25	2900	900	3150	900	958	276	19.5	ETRTO
275/70R22.5	16	144/141	J	8.25	2575	830	2800	830	958	276	19.5	GB
305/70R22.5	16	152/148 (154/150)	J(E)	9.00	3150	900	3550	900	1000	305	20.0	ETRTO
215/75R17.5	16	126/124	J	6.00	1600	700	1700	700	1059	212	17.0	ETRTO
295/80R22.5	16	152/148 (154/150)	J(E)	9.00	3150	900	3550	900	1044	298	20.0	ETRTO
295/80R22.5	16	150/147	J	9.00	3075	830	3350	830	1044	298	20.0	GB
295/80R22.5	18	152/149	J	9.00	3250	900	3550	900	1044	298	20.0	GB



LAU603

Radial Bus Tire (Coach)

- 1.Suitable for all axle of bus riding on highway.
- 2.Long life.
- 3.Good grip performance.
- 4.low eccentric wear.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
9R22.5	14	136/134	M	6.75	2120	830	2240	830	974	229	15.0	TRA
10R22.5	14	141/139	L	7.50	2430	790	2575	790	1019	254	17.0	TRA
11R22.5	14	144/142	M	8.25	2650	720	2900	720	1054	279	16.0	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	16.0	TRA
11R22.5	16	148/145	M	8.25	2900	850	3150	850	1054	279	16.0	ETRTO
12R22.5	16	150/147	M	9.00	3075	830	3350	830	1085	300	17.0	GB
12R22.5	16	152/148	M	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	16.0	ETRTO
275/70R22.5	16	144/141	M	8.25	2575	830	2800	830	958	276	16.0	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
295/80R22.5	16	150/147	M	9.00	3075	830	3350	830	1044	298	17.0	GB
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	17.0	GB



LAU605

Radial Bus Tire (Coach)

1. Extra wide tread design for high mileage and even wear.
2. Zig-zag grooves for excellent handling.
3. Optimize structure design.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.50R14LT	8	95/90	L	4 1/2J	600	450	690	450	672	168	10.0	GB
6.00R15LT	8	97/92	L	4.50E	630	460	730	460	705	170	10.5	GB
7.50R15LT	8	110/105	L	6.00G	925	460	1060	460	780	215	13.0	GB
7.50R15LT	10	115/110	L	6.00G	1060	560	1215	560	780	215	13.0	GB
6.50R16LT	10	107/102	M	5.50F	850	560	975	560	750	185	12.0	GB
6.50R16LT	12	110/105	L	5.50F	925	670	1060	670	750	185	12.0	GB
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	13.0	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	13.0	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	14.0	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	15.0	GB
8.25R16LT	16	128/124	L	6.50H	1800	770	1800	770	855	235	14.0	GB
8R22.5	14	130/128	M	6.00	1800	830	1900	830	935	203	14.0	GB
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	14.5	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	14.5	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	14.5	ETRTO
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	212	14.5	ETRTO
215/75R17.5	16	135/133	J	6.00	2080	850	2180	850	767	212	14.5	ETRTO
215/75R17.5	14	125/122	M	6.00	1500	760	1650	760	767	211	14.5	GB
215/75R17.5	16	127/124	J	6.00	1600	830	1750	830	767	211	14.5	GB
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	14.5	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	14.5	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	14.5	ETRTO
235/75R17.5	14	129/128	M	6.75	1700	760	1850	760	797	233	14.5	GB
235/75R17.5	16	132/129	J	6.75	1850	830	2000	830	797	233	14.5	GB
225/80R17.5	14	123/122	L	6.75	1500	700	1550	700	805	226	16.0	JATMA

Light Truck





KTD23 New —

Radial truck tire(Regional Drive)

1. Suitable for drive axle of trucks using for high traction and high scrub applications.
2. Horizontal pattern provide tyre excellent drive and brake performance.
3. Shoulder pattern groove and open pattern design, good tire heat dissipation
4. Pattern block stiffener, effectively restrain grinding block root tear and decorative pattern



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
225/70R19.5	12	125/123	L	6.75	1550	660	1650	660	811	226	15.8	TRA
225/70R19.5	14	128/126	L	6.75	1700	760	1800	760	811	226	15.8	TRA
245/70R19.5	14	133/131	L	7.50	1950	760	2080	760	839	248	15.8	TRA
245/70R19.5	16	135/133	L	7.50	2060	830	2180	830	839	248	15.8	TRA
215/75R17.5	16	135/133	L	6.00	2060	850	2180	850	767	212	15.0	ETRTO



LFL866

Radial Truck Tire (Regional)

1. Extra wide tread design for high mileage and even wear.
2. Zig-zag grooves for excellent handling.
3. Optimize structure design.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.00R14LT	8	95/90	L	4 1/2J	600	450	690	450	680	170	10.0	GB
6.00R15LT	8	97/92	L	4.50E	630	460	730	460	705	170	10.5	GB
7.50R15LT	8	110/105	L	6.00G	925	460	1080	460	780	215	13.0	GB
7.50R15LT	10	115/110	L	6.00G	1060	560	1215	560	780	215	13.0	GB
6.50R16LT	12	110/105	L	5.50F	925	670	1080	670	750	195	12.0	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	13.0	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	13.0	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	13.0	GB
8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	14.0	GB
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	799	248	14.5	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	14.5	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	799	248	14.5	ETRTO
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	212	14.5	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2190	850	767	212	14.5	ETRTO
215/75R17.5	14	125/122	M	6.00	1500	760	1650	760	767	211	14.5	GB
215/75R17.5	16	127/124	J	6.00	1600	830	1750	830	767	211	14.5	GB
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	14.5	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	14.5	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	14.5	ETRTO
235/75R17.5	14	129/126	M	6.75	1700	760	1850	760	797	233	14.5	GB
235/75R17.5	16	132/129	J	6.75	1850	830	2000	830	797	233	14.5	GB
225/80R17.5	14	123/122	L	6.75	1500	700	1550	700	805	226	16.0	JATMA



LDL831

Radial Truck Tire (Regional)

1. Typical block pattern design make good towing and grip on wet and dry road.
2. Strong wear resistance and long life.
3. Retreadability.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	18.0	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	18.0	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	18.0	ETRTO
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	212	16.0	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	212	16.0	ETRTO
215/75R17.5	14	125/122	M	6.00	1500	760	1650	760	767	211	16.0	GB
215/75R17.5	16	127/124	J	6.00	1600	830	1750	830	767	211	16.0	GB
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	17.0	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	17.0	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	17.0	ETRTO
235/75R17.5	14	129/126	M	6.75	1700	760	1850	760	797	233	17.0	GB
235/75R17.5	16	132/129	J	6.75	1850	830	2000	830	797	233	17.0	GB



F815

Radial Truck Tire (Regional)

Suitable for trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.00R14LT	8	95/90	L	4	600	450	690	450	680	170	10.0	GB
6.00R15LT	8	97/92	L	4.50E	630	460	730	460	705	170	10.5	GB
6.50R16LT	10	107/102	M	5.50F	850	560	975	560	750	185	10.5	GB
6.50R16LT	12	110/105	L	5.50F	925	670	1060	670	750	185	10.5	GB



F830

Radial Truck Tire (Regional)

Suitable for medium trucks running on the highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	10.5	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	10.5	GB



LLF26

Radial Truck Tire (Regional)

Suitable for medium trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
8.25R15TR	12	126/124	M	6.50	1600	720	1700	720	847	236	12.5	TRA
8.25R15TR	14	129/127	L	6.50	1750	830	1850	830	847	236	12.5	TRA
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	11.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	11.5	GB
8.25R16LT	12	123/119	M	6.50H	1360	560	1550	560	855	235	12.5	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	12.5	GB
8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	12.5	GB
8.5R17.5	12	121/120	M	6.00	1400	625	1450	625	802	215	12.5	ETRTO
9.5R17.5	14	129/127	M	6.75	1750	750	1850	750	842	240	12.0	ETRTO
9.5R17.5	18	143/141	M	6.75	2575	875	2725	875	842	240	12.0	ETRTO
8R19.5	12	124/122	M	6.00	1500	760	1600	760	859	203	12.5	TRA



LLF86

Radial Truck Tire (Regional)

Suitable for medium trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
215/75R17.5	14	126/124	LM	6.00	1600	700	1700	700	767	212	12.0	ETRTO
215/75R17.5	16	135/133	J/L	6.00	2060	850	2180	850	767	212	12.0	ETRTO



LLA78

Radial Truck Tire (Regional)

1. Typical combined pattern.
2. Suitable for all position of medium trucks running on highway and normal road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	12.0	ETRTO
235/75R17.5	12	130/128	M	6.75	1800	725	1900	725	797	233	13.0	ETRTO
235/75R17.5	14	132/130	LM	6.75	1900	775	2000	775	797	233	13.0	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	860	2575	850	797	233	13.0	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	13.0	ETRTO



D905

Radial Truck Tire (Regional)

1. Typical block pattern design suitable for drive axle of trucks running on highway.
2. Good braking and grip on wet road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
245/70R17.5	18	143/141	L	7.50	2575	875	2725	875	789	248	18.0	ETRTO
225/70R19.5	12	125/123	M	6.75	1550	660	1650	660	811	226	15.0	GB
225/70R19.5	14	128/126	M	6.75	1700	760	1800	760	811	226	15.0	GB
245/70R19.5	14	133/131	L	7.50	1950	760	2060	760	839	248	16.5	TRA
245/70R19.5	14	141/140	L	7.50	2500	850	2575	850	839	248	16.5	ETRTO
215/75R17.5	12	124/123	M	6.00	1550	675	1600	675	767	212	15.0	ETRTO
215/75R17.5	14	126/124	L/M	6.00	1600	700	1700	700	767	212	15.0	ETRTO
215/75R17.5	16	135/133	J/L	6.00	2060	850	2180	850	767	212	15.0	ETRTO
215/75R17.5	16	127/124	J	6.00	1600	830	1750	830	767	211	15.0	GB
235/75R17.5	14	132/130	L/M	6.75	1900	775	2000	775	797	233	15.5	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	15.5	ETRTO
235/75R17.5	16	132/129	L	6.75	1850	830	2000	830	797	233	15.5	GB
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	15.5	ETRTO



LAR919

Radial Truck Tire (On&Off Road)

1. pattern block design reduce shoulder heat.
2. Wide running surface and higher saturation design improve the wear mileage.
3. Powerful traction, grip and climbing performance.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.00R14LT	8	95/90	K	4 1/2J	600	450	690	450	680	170	10.0	GB
6.00R15LT	8	97/92	K	4.50E	630	460	730	460	705	170	10.5	GB
6.50R16LT	12	110/105	K	5.50F	925	670	1060	670	760	185	12.0	GB
7.00R16LT	14	118/114	K	5.50F	1180	770	1320	770	783	200	14.0	GB
7.50R16LT	14	122/118	K	6.00G	1320	770	1500	770	805	215	15.0	GB
8.25R16LT	16	128/124	K	6.50H	1600	770	1800	770	865	235	16.0	GB



LAR715

Radial Truck Tire (On&Off Road)

1. Typical block pattern design suitable for drive axle of trucks.
2. Wide and deep tread grooves for long tire life.
3. Excellent cutting and chipping resistance.
4. Robust tread and high traction on rough surfaces.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
8.25R16LT	16	128/124	D	6.50H	1800	770	1800	770	865	235	18.0	GB



LAR959

Radial Truck Tire (On&Off Road)

1. Typical block pattern design suitable for drive axle of trucks.
2. Wide and deep tread grooves for long tire life.
3. Excellent cutting and chipping resistance.
4. Robust tread and high traction on rough surfaces.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.00R14LT	8	95/90	F	4 1/2J	600	450	690	450	680	170	12.5	GB
6.00R14LT	8	95/90	F	4 1/2J	600	450	690	450	672	168	12.5	GB
6.00R15LT	8	97/92	F	4.50E	630	460	730	460	705	170	12.5	GB
6.50R16LT	12	110/105	F	5.50F	925	670	1060	670	760	185	13.5	GB
7.00R16LT	14	118/114	F	5.50F	1180	770	1320	770	783	200	17.0	GB
7.50R16LT	14	122/118	F	6.00G	1320	770	1500	770	815	215	18.0	GB
8.25R16LT	16	128/124	D	6.50H	1600	770	1800	770	865	235	18.0	GB
9.00R16LT	16	134/129	D	6.50H	1850	770	2120	770	900	255	18.0	GB



LLA08

Radial Truck Tire (On&Off Road)

1. Typical combined pattern.
2. Suitable for trucks of different tonnages which run on highway and normal road.
3. Strong wear resistance, low heat generation.
4. Good handling.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.50R16LT	10	107/102	M	5.50F	850	560	975	560	750	185	10.5	GB
6.50R16LT	12	110/105	L	5.50F	925	670	1060	670	750	185	10.5	GB
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	11.5	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	11.5	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	12.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	12.5	GB
8.25R16LT	12	123/119	M	6.50H	1360	560	1550	560	855	235	13.5	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	13.5	GB
8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	13.5	GB
9.00R16LT	14	131/126	L	6.50H	1750	670	1950	670	890	255	14.5	GB
9.00R16LT	16	134/129	L	6.50H	1850	770	2120	770	890	255	14.5	GB



D955

Radial Truck Tire (On&Off Road)

1. Drive axle for on/off road conditions.
2. Deep and rigid block design for good traction.
3. Cut resistance compound.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	12.5	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	14.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	14.5	GB
8.25R16LT	12	123/119	M	6.50H	1360	560	1550	560	855	235	15.5	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	15.5	GB
8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	15.5	GB
225/70R19.5	12	125/123	M	6.75	1550	660	1650	660	811	226	14.5	TRA
225/70R19.5	14	128/126	M	6.75	1700	760	1800	760	811	226	14.5	TRA
245/70R19.5	14	133/131	M	7.50	1950	760	2060	760	839	248	15.5	TRA
245/70R19.5	14	133/131	M	7.50	1950	750	2060	750	839	248	15.5	ETRTO
245/70R19.5	16	136/134	L	7.50	2120	825	2240	825	839	248	15.5	ETRTO



LLD09

Radial Truck Tire (On&Off Road)

1. Typical block pattern design suitable for drive axle of trucks.
2. Suitable for on/off road conditions.
3. It is also suitable for trucks running with high speed on highway for short distance.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	815	215	13.5	GB
7.50R16LT	14	122/119	M	6.00G	1320	770	1500	770	815	215	13.5	GB
8.25R16LT	12	123/119	L	6.50H	1360	560	1550	560	865	235	14.5	GB
8.25R16LT	14	126/122	K	6.50H	1500	670	1700	670	865	235	14.5	GB
8.25R16LT	16	128/124	K	6.50H	1600	770	1800	770	865	235	14.5	GB



D969

Radial Truck Tire (Off Road)

- Suitable for hilly area and mine etc., off road conditions
1. Off-road pattern block ensures powerful traction and good self-cleaning ability.
 2. Optimized compound delivers good puncture resistance.
 3. Long life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.00R16LT	12	115/110	F	5.50F	1060	670	1215	670	783	200	15.5	GB
7.00R16LT	14	118/114	F	5.50F	1180	770	1320	770	783	200	15.5	GB
7.50R16LT	12	120/116	F	6.00G	1250	670	1400	670	815	215	17.5	GB
7.50R16LT	14	122/118	F	6.00G	1320	770	1500	770	815	215	17.5	GB
8.25R16LT	12	123/119	F	6.50H	1360	560	1550	560	865	235	17.5	GB
8.25R16LT	14	126/122	F	6.50H	1500	670	1700	670	865	235	17.5	GB
8.25R16LT	16	128/124	F	6.50H	1600	770	1800	770	865	235	17.5	GB



F835

Radial Truck Tire (Regional)

Suitable for the steer and trailer axle of medium trucks running on the highway.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
LT225/75R16	12	119/116	N	6.00	1250	650	1360	650	744	223	11.1	TRA
LT245/75R16	12	123/120	N	7.00	1400	650	1550	650	774	249	11.1	TRA
LT235/85R16	14	126/123	L	6 1/2J	1550	750	1700	750	806	235	8.9	—
ST235/85R16	14	132/127	L	6 1/2J	1750	760	2000	760	806	235	8.9	TRA



LAL812

Radial Truck Tire (Regional)

Suitable for medium trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
195/85R16LT	12	114/112	L	5 1/2J	1120	600	1180	600	738	196	10.0	JATMA
205/85R16LT	10	117/115	L	5 1/2J	1215	600	1285	600	754	203	10.0	JATMA



LAL867

Radial Truck Tire (Regional)

Suitable for medium trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
195/85R16LT	12	114/112	L	5 1/2J	1120	600	1180	600	738	196	10.0	JATMA
205/85R16LT	10	117/115	L	5 1/2J	1215	600	1285	600	754	203	10.0	JATMA



LAL815

Radial Truck Tire (Regional)

- 1.Suitable for all position of trucks.
- 2.Low noise and comfortable performance.
- 3.'Z'pattern design,provide good wet grip and good handling.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
225/90R17.5	14	123/122	L	6.75	1500	700	1550	700	805	226	15	JATMA



LAM903

Radial Truck Tire (Desert)

- 1.Suitable for all position of trucks running on on/off road.
- 2.High traction.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.50R16LT	8	112/107	L	6.00G	975	480	1120	480	805	215	9.5	GB



D950

Radial Truck Tire (Short Haul)

1. Drive axle for on/off road conditions.
2. Deep and rigid block design for good traction.
3. Cut resistance compound.
4. Used for logging conditions where high traction required.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
11R22.5	14	144/142	K	8.25	2650	720	2800	720	1065	279	23.0	TRA
11R22.5	16	146/143	K	8.25	2725	830	3000	830	1065	279	23.0	TRA
11R22.5	16	148/145	K	8.25	2900	850	3150	850	1065	279	23.0	ETRTO
11R24.5	14	146/143	F	8.25	2725	720	3000	720	1116	279	25.0	TRA
11R24.5	16	149/146	F	8.25	3000	830	3250	830	1116	279	25.0	TRA
295/75R22.5	16	146/143	F	9.00	2725	830	3000	830	1026	298	23.0	TRA
285/75R24.5	16	147/144	F	8.25	2800	830	3075	830	1062	283	23.0	TRA

Winter





KWD600 New —

Radial Truck Tire On Ice And Snow

1. Suitable for drive axle of trucks under snow condition
2. Lasting grip and stability, with M+S and 3PMSF marking
3. Optimized rib contact combats uneven wear and improves wet handling and braking.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	—	ETRTO
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	22.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	22.0	ETRTO



LFW806

Radial Truck Tire On Ice And Snow

1. Suitable for steer axle of trucks.
2. High safety and good handling.
3. Optimized rib contact combats uneven wear and improves wet handling and braking.
4. Low noise.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.50R16LT	10	107/102	M	5.50F	850	560	975	560	750	185	11.0	GB
6.50R16LT	12	110/105	M	5.50F	925	670	1060	670	750	185	11.0	GB
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	11.5	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	11.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	12.0	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	12.5	GB
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	15.0	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	15.0	TRA
395/65R22.5	20	180(158)	J(L)	11.75	—	—	4500	900	1072	389	16.5	ETRTO
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	15.0	ETRTO
275/70R22.5	16	144/141	M	8.25	2575	830	2800	830	958	276	15.0	GB
315/70R22.5	16	154/150	L	9.00	3350	900	3750	900	1014	312	15.0	ETRTO
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	15.0	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	15.0	TRA
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	15.0	ETRTO
295/80R22.5	16	150/147	K	9.00	3075	830	3350	830	1044	298	15.0	GB
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	15.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	15.0	ETRTO



LDW807

Radial Truck Tire On Ice And Snow

1. Suitable for drive axle of trucks.
2. High safety and good handling.
3. Optimized rib contact combats uneven wear and improves wet handling and braking.
4. Long life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	14.5	GB
8.25R16LT	14	126/122	L	6.50H	1500	870	1700	870	855	235	15.5	GB
11R22.5	16	146/143	M	8.25	2725	800	3000	800	1059	279	20.0	JATMA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1059	279	20.0	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1059	279	20.0	ETRTO
315/70R22.5	16	154/150	L	9.00	3350	900	3750	900	1014	312	20.0	ETRTO
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	20.0	ETRTO
295/80R22.5	16	150/147	K	9.00	3075	830	3350	830	1044	298	20.0	GB
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	20.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	20.0	ETRTO





LDW808

Radial Truck Tire On Ice And Snow

- 1.Suitable for drive axle of trucks.
- 2.High safety and good handling.
- 3.Optimized rib contact combats uneven wear and improves wet handling and braking.
- 4.Long life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
6.00R14LT	8	95/90	L	4 1/2J	600	450	690	450	680	170	10.0	GB
6.50R16LT	12	110/105	M	5.50F	925	670	1060	670	750	185	12.0	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	13.0	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	13.0	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	15.0	GB
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	15.0	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	15.0	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	15.0	ETRTO
225/70R19.5	12	125/123	M	6.75	1550	660	1650	660	811	226	15.0	GB
225/70R19.5	14	128/128	M	6.75	1700	760	1800	760	811	226	15.0	GB
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	212	13.0	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	212	13.0	ETRTO
215/75R17.5	14	125/122	M	6.00	1500	760	1650	760	767	211	13.0	GB
215/75R17.5	16	127/124	J	6.00	1600	830	1750	830	767	211	13.0	GB
235/75R17.5	14	132/130	L/M	6.75	1900	775	2000	775	797	233	14.0	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	14.0	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	14.0	ETRTO
235/75R17.5	14	129/126	L	6.75	1700	760	1850	760	797	233	14.0	GB
235/75R17.5	16	132/129	J	6.75	1850	830	2000	830	797	233	14.0	GB



LDX701 New —

Radial Truck Tire On Ice And Snow

1. Suitable for drive axle of trucks.
2. Innovated snowflake design, improves wet handling and braking.
3. Optimized rib contact combats uneven wear and improves wet handling and braking.
4. Four seasons use , long life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kPa	kg	kPa				
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	20	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	20	ETRTO



An aerial photograph of a massive open-pit mine. The mine is characterized by deep, terraced levels of earth and rock. Numerous yellow excavators and red trucks are visible throughout the site, engaged in various mining activities. A large body of water, likely a tailings pond, is situated in the lower right portion of the image. The overall scene is one of intense industrial activity.

SPECIALTY — TIRE

OTR

Radial OTR

—





Dump Truck



LMS401(E-4)

Radial OTR

Exceptional traction

Massive tread blocks characterise this tyre, it delivers excellent tractive performance, better lateral adhesion and more efficient loading for machines working at the face.

Good self cleaning

Flower chime angle changed design, it delivers good self cleaning.

Operating comfort

A wide, square tread gives better stability in loading operations and whilst traveling.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
26.5R25	★★	193	209	22.00/3.0	11500	450	18500	575	1798	673	56.0
29.5R25	★★	200	216	25.00/3.5	14000	450	22400	575	1921	750	61.0



DO993(E-3/L-3)

Radial OTR(Short Haul)

1. Good traction resistance.
2. Chip, cut and abrasion resistance tread compound.
3. Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
13.00R25	★★★	163	182	8.50	4875	700	8500	950	1300	350	30.0
14.00R24	★★★	169	188	10.00	5800	700	10000	950	1370	375	30.0
14.00R25	★★★	169	188	10.00	5800	700	10000	950	1370	375	30.0



LB02S(E-4)

Radial OTR

1. Exceptional traction and manoeuvrability.
2. Good flotation.
3. Excellent stability and comfort.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
18.00R33	★★	191	209	13.00/2.5	10900	650	18500	800	1877	498	53.0



LB03S(E-4)

Radial OTR

1. High satty.
2. Wide contact area with ground provides strong grip.
3. Low noise.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
16.00R25	★★	177	195	11.25/2.0	7300	650	12150	800	1548	432	42.0
18.00R25	★★	185	204	13.00/2.5	9250	650	16000	800	1673	498	46.0



LB06S(E-3)

Radial OTR

1. Good traction and wear resistance.
2. Excellent tear resistance.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
750/65R25	★★	190	---	24.00/3.0	10600	425	---	---	1610	754	45.0
26.5R25	★★	193	209	22.00/3.0	11500	450	18500	575	1760	673	44.0
29.5R25	★★	200	216	25.00/3.5	14000	450	22400	575	1873	750	44.0



DM992

Radial OTR

1. Long life.
2. Excellent adhesion and traction in bad conditions.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
13.00R25	★★★	163	182	10.00	4875	700	8500	950	1300	350	26.0
14.00R24	★★★	169	188	10.00	5800	700	10000	950	1370	375	26.0
14.00R25	★★★	172	193	10.00	6300	900	11500	1100	1370	375	24.0

Loader



LB01N

Radial OTR

1. Exceptional traction and manoeuvrability.
2. Good flotation.
3. Excellent stability and comfort.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
17.5R25	★★	167	182	14.00/1.5	5450	450	8500	575	1348	445	27.0
20.5R25	★★	177	193	17.00/2.0	7300	450	11500	575	1492	520	30.0
23.5R25	★★	185	201	19.5/2.5	9250	450	14500	575	1617	597	33.0
26.5R25	★★	193	209	22.00/3.0	11500	450	18500	575	1750	673	36.0
29.5R25	★★	200	216	25.00/3.5	14000	450	22400	575	1873	750	39.0



LM01N

Radial OTR

1. Exceptional traction and manoeuvrability.
2. Good flotation.
3. Excellent stability and comfort.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
23.5R25	★★	185	201	19.5/2.5	9250	450	14500	575	1617	597	30.5



LB03SD(L-5)

Radial OTR

Exceptionally robust in masacre conditions

A substantial crown, robust shoulders reinforced with a protection band make up a tyre particularly resistant to shock ruptures, cuts and tread tearing.

A particularly resilient casing with the addition of several specific steel belts constitute a tyre that is very resistant to punctures.

Excellent compromise of adhesion and traction

A very substantial, wide and aggressive tread functions perfectly to produce a good compromise between adhesion, traction and damage resistance.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
17.5R25	★★	167	182	14.00/1.5	5450	450	8500	575	1399	445	64.0
20.5R25	★★	177	193	17.00/2.0	7300	450	11500	575	1548	520	71.0
23.5R25	★★	185	201	19.5/2.5	9250	450	14500	575	1673	597	77.5
26.5R25	★★	193	209	22.00/3.0	11500	450	18500	575	1798	673	86.5
29.5R25	★★	200	216	25.00/3.5	14000	450	22400	575	1921	750	94.0



LB02SD(L-5)

Radial OTR

Exceptional traction

Massive tread blocks characterise this tyre.

High Efficiency

The extra deep tread pattern (L5) of this tyre gives outstanding wear life potential.

The sidewall/tread intersection design gives an excellent level of damage and cut resistance.

Operating comfort

A wide, square tread gives better stability in loading operations and whilst travelling.

A directional pattern.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
20.5R25	★★	177	193	17.00/2.0	7300	450	11500	575	1548	520	71.0
23.5R25	★★	185	201	19.5/2.5	9250	450	14500	575	1673	597	77.5
26.5R25	★★	193	209	22.00/3.0	11500	450	18500	575	1798	673	86.5
29.5R25	★★	200	216	25.00/3.5	14000	450	22400	575	1921	750	94.0



Sand



LD702(E-7)

Radial OTR

1. Excellent grip: the combination of vertical and horizontal pattern groove.
2. Safety and comfort: strengthened bead area tubeless solution preventing sudden pressure loss.

Size	Ply Rating	Load Index	Speed Symbol	Rim	LOAD CAPACITY (kg)	Inflated Pressure (kpa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
24R20.5	★ /16PR	176	F	18.00	7100	600	1370	600	21.0

Mobile Crane



LM11N

Radial OTR

1. Exceptional traction and manoeuvrability.
2. Good flotation.
3. Excellent stability and comfort.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
445/95R25	★★	177	E	11.25/2.0	7300	900	1481	435	23.0
385/95R25	★★	170	E	10.00/1.5	6000	900	1369	379	21.0



LLA28

Radial OTR

1. Good traction resistance.
2. Chip, cut and abrasion resistance tread compound.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
16.00R25	★★	177	195	11.25/2.0	7300	650	12150	800	1493	432	23.0



LLA28

Radial OTR

1. Good traction resistance.
2. Chip, cut and abrasion resistance tread compound.

Motor Tractor

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY (kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
16.00R25	★★	177	195	11.25/2.0	7300	650	12150	800	1493	432	23.0





Bias OTR

—



Dump Truck

EM01(E-3) New —

OTR Tire

- 1 Deep tread pattern ensure tyre life.
- 2 Wider tread blocks enhance traction performance.
- 3 Special compound design , low heat-generation,excellent wear and tear resistance.
- 4 Available for large rigid dump trucks.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
14.00-24	24	10.0	9600	850	5150	575	375	1370	34.0	TT	
14.00-24	28	10.0	10000	925	5600	650	375	1370	34.0	TT	
14.00-25	28	10.00/1.5	10000	925	5600	650	375	1370	33.0	TT	



EM02(E-4) New —

OTR Tire

- 1.Available for large self-dumping trucks.
- 2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
21.00-35	40	15.00/3.0	24300	825	14000	625	570	2050	60.0	TL	
24.00-35	42	17.00/3.5	29000	750	16500	550	655	2175	60.0	TL	



EM03(E-4) New —

OTR Tire

- 1 Deep tread pattern ensure tyre life.
- 2 Wider tread blocks enhance traction performance.
- 3 Special compound design ,low heat-generation,excellent wear and tear resistance.
- 4 Available for large rigid dump trucks.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
12.00-24	24	8.5	7500	975	4125	650	315	1275	40.0	TT	



LL25(E-3/L-3)

OTR Tire

- 1.Available for large rigid dump trucks.
- 2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
16.00-25	28	11.25/2.0	11500	750	6700	575	430	1495	28.5	TT/TL	
16.00-25	32	11.25/2.0	12500	875	7300	650	430	1495	28.5	TT/TL	
16.00-25	36	11.25/2.0	13600	975	7750	725	430	1495	28.5	TT	



LL131(E-3)

OTR Tire

1. Available for large rigid dump trucks.
2. Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
13.00-25	26	8.50	---	---	4800	710	335	1300	24.5	TT	



LL42(E-3)

OTR Tire

1. Available for large rigid dump trucks.
2. Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
14.00-24	16	10.0	7300	550	4000	375	375	1370	27.0	TT	
14.00-24	24	10.0	9600	850	5150	575	375	1370	27.0	TT	
14.00-24	28	10.0	10000	925	5600	650	375	1370	27.0	TT	
14.00-25	28	10.0	10000	925	5600	650	375	1370	27.0	TT	
14.00-25	36	10.0	11050	1100	5500	850	375	1370	27.0	TT	



LL26/E-3

OTR Tire

1. Available for large self-dumping trucks.
2. Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
18.00-25	32	13.00/2.5	15000	750	8750	575	500	1615	30.0	TT/TL	
18.00-25	40	13.00/2.5	17000	950	9750	700	500	1615	30.0	TT/TL	



LL56(E-3)

OTR Tire

1. Available for large self-dumping trucks.
2. Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
18.00-25	32	13.00/2.5	15000	750	8750	575	500	1615	30.0	TT	
18.00-25	36	13.00/2.5	16000	850	9250	625	500	1615	30.0	TT	



LL90(E-4)

OTR Tire

1. Available for large self-dumping trucks.
2. Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max. Load (kg)	Inflated Pressure (kPa)	Max. Load (kg)	Inflated Pressure (kPa)				TT	TL
18.00-33	32	13.00	17500	750	10000	575	500	1875	50.0	TL	
18.00-33	36	13.00	18500	850	10600	625	500	1875	50.0	TL	
18.00-33	40	13.00	19500	950	11200	700	500	1875	50.0	TL	



E-4

OTR Tire

1. Available for large self-dumping trucks.
2. Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max. Load (kg)	Inflated Pressure (kPa)	Max. Load (kg)	Inflated Pressure (kPa)				TT	TL
21.00-33	32	15.00/3.0	-	-	10300	500	570	1940	42.0	TL	
21.00-33	42	15.00/3.0	-	-	12400	690	570	1940	42.0	TL	



E-4

OTR Tire

1. Available for large self-dumping trucks.
2. Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max. Load (kg)	Inflated Pressure (kPa)	Max. Load (kg)	Inflated Pressure (kPa)				TT	TL
21.00-35	32	15.00/3.0	21200	650	12150	500	570	2050	42.0	TL	
21.00-35	36	15.00/3.0	23000	750	12650	550	570	2050	42.0	TL	
21.00-35	40	15.00/3.0	24300	825	14000	625	570	2050	42.0	TL	



Underground Work



LSM401(L-4S)

OTR Tire

1. Available for loaders operating under seriously tough service conditions in tunnels.
2. Excellent wear and cut resistance.
3. Flat and smooth tread improves the puncture resistance to stone.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
10.00-20	14	-	-	7.5	3260	670	278	1073	35.0	TT	
10.00-20	16	-	-	7.5	3535	770	278	1073	35.0	TT	



LSM401(L-4S+)

OTR Tire

1. Available for loaders operating under seriously tough service conditions in tunnels.
2. Excellent wear and cut resistance.
3. Flat and smooth tread improves the puncture resistance to stone.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
10.00-20	14	-	-	7.5	3260	670	278	1073	45.0	TT	
10.00-20	16	-	-	7.5	3535	770	278	1073	45.0	TT	



LSM402

OTR Tire

- 1 Special tread compound design.High wear resistance performance.
- 2 Wide tread arc and deep pattern design.Increase tyre life.
- 3 Sole sidewall protection design.Enhance puncture resistance performance.
- 4 Novel appearance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
9.00-20	14	-	-	7.0	4375	725	255	1015	35.0	TT	
9.00-20	16	-	-	7.0	4750	825	255	1015	35.0	TT	
12.00-24	16	-	-	8.5	6150	675	315	1245	55.0	TT	
12.00-24	18	-	-	8.5	6500	750	315	1245	55.0	TT	
12.00-24	20	-	-	8.5	6900	825	315	1245	55.0	TT	
12.00-24	24	-	-	8.5	7500	975	315	1245	55.0	TT	
14.00-24	28	-	-	10.0	10000	925	375	1420	65.0	TT	
14.00-24	32	-	-	10.0	10900	1050	375	1420	65.0	TT	
17.5-25	20	-	-	14.00/1.5	8250	575	395	1400	65.0	TT	
17.5-25	24	-	-	14.00/1.5	9250	700	395	1400	65.0	TT	
17.5-25	32	-	-	14.00/1.5	11700	830	395	1400	65.0	TT	
18.00-25	28	-	-	13.00/2.5	13600	650	495	1675	85.0	TL	
18.00-25	32	-	-	13.00/2.5	15000	750	495	1675	85.0	TL	
18.00-25	40	-	-	13.00/2.5	17000	950	495	1675	85.0	TL	
18.00-25	44	-	-	13.00/2.5	18000	1050	495	1675	85.0	TL	



Loader

L301(E-3+)

OTR Tire

- 1.Deepen the pattern design, increase the service life of the tire.
- 2.Large tread pattern block design, uniform tread wear.
- 3.Special mine formula, anti cutting, anti tearing, super abrasion resistance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
17.5-25	12	14.00/15	6150	350	3650	225	445	1350	36.0	TT	
23.5-25	16	19.50/2.5	9500	300	6150	225	595	1615	45.0	TT	



LL25(E-3/L-3)

OTR Tire

1. Available for loaders and dozers.
2. Wear and puncture resistance.
3. Wide application.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
15.5-25	12	12.00/1.3	5600	400	3250	250	395	1275	25.0	TL	
17.5-25	12	14.00/15	6150	350	3650	225	445	1350	25.5	TT/TL	
17.5-25	16	14.00/15	7300	475	4250	300	445	1350	25.5	TT/TL	
20.5-25	16	17.00/2.0	8250	350	5450	275	520	1490	28.5	TT/TL	
20.5-25	20	17.00/2.0	9500	450	6000	325	520	1490	28.5	TT/TL	
23.5-25	16	19.50/2.5	9500	300	6150	225	595	1615	31.5	TT/TL	
23.5-25	18	19.50/2.5	10400	350	6900	275	595	1615	31.5	TT	
23.5-25	20	19.50/2.5	10900	375	7300	300	595	1615	31.5	TT/TL	
23.5-25	24	19.50/2.5	12500	475	8000	350	595	1615	31.5	TT	
26.5-25	20	22.00/3.0	13200	350	8250	250	675	1750	35.0	TT	
26.5-25	24	22.00/3.0	14000	400	9250	300	675	1750	35.0	TL	
26.5-25	28	22.00/3.0	15500	475	10000	350	675	1750	35.0	TT/TL	
29.5-25	28	25.00/3.5	17500	425	11500	325	750	1875	40.0	TL	



LL136(E-3/L-3)

OTR Tire

1. Specialized pattern for sand and other soft surfaces.
2. High side-skid resistance and traction.
3. Excellent in self-cleaning, handling stability and driving comfort.
4. Larger contact area offers even wear and long life.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
23.5-25	16	19.50/2.5	9500	300	6150	225	595	1615	31.5	TT	



E-3/L-3

OTR Tyre

- 1.Suitable for heavy loaders used on bad road condition of mine,stone pit and tunnel,etc.
- 2.Good impale and wear resistance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
29.5-29	28	25.00/3.5	19000	425	12150	325	750	1975	40.0	TL	



LL55(E-3)

OTR Tire

- 1.Available for loaders and dozers.
- 2.Wear and puncture resistance.
- 3.Wide application.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
16/70-20	10	13	4200	325	2400	250	410	1075	20.0	TT	
16/70-20	14	13	5150	450	5150	450	410	1075	20.0	TT	



Port



LP401(IND-4)

Port Tire

- 1.Extra deep tread pattern ensure tyre life.
- 2.Wider tread blocks enhance traction performance.
- 3.Special compound design for ports,low heat-generation,excellent wear and tear resistance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
14.00-24	28	10.0	14500	1000	13500	1000	375	1420	65.0	TT	
16.00-25	36	11.25/2.0	19700	1000	18400	1000	430	1550	67.0	TL	
18.00-25	40	13.00/2.5	24600	1000	22900	1000	500	1675	72.0	TL	



LP402(IND-3)

Port Tire

- 1.Extra deep tread pattern ensure tyre life.
- 2.Wider tread blocks enhance traction performance.
- 3.Special compound design for ports,low heat-generation,excellent wear and tear resistance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
21.00-25	40	15.00/3.0	29310	1000	27290	1000	570	1750	44.0	TL	



Graders



G-2

OTR Tire

1. Good steer and traction.
2. Off-road pattern has self-cleaning performance and comfort.

Size	Ply Rating	Rim	10km/h		40km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max. Load (kg)	Inflated Pressure (kPa)	Max. Load (kg)	Inflated Pressure (kPa)				TT	TL
13.00-24	12	8.00TG	5600	450	2725	300	335	1280	24.0	TL	
13.00-24	18	8.00TG	6700	675	3500	450	335	1280	24.0	TL	
14.00-24	12	8.00TG	6300	425	3075	275	360	1350	24.0	TT/TL	
14.00-24	16	8.00TG	7300	550	3650	350	360	1350	24.0	TT/TL	



LG201(G-2)

OTR Tire

1. Good steer and traction.
2. Off-road pattern has self-cleaning performance and comfort.

Size	Ply Rating	Rim	10km/h		40km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
16.00-24	12	11.25/2.5	7100	325	3650	225	430	1490	28.5	TT	
16.00-24	16	11.25/2.5	8250	425	4500	250	430	1490	28.5	TT	
16.00-24	20	11.25/2.5	9250	525	5450	420	430	1490	28.5	TT	



E-2/L-2

OTR Tire

1. Good steer and traction.
2. Off-road pattern has self-cleaning performance and comfort.

Size	Ply Rating	Rim	10km/h		40km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				TT	TL
15.5-25	12	12.00/1.3	5600	400	3250	250	395	1275	24.0	TL	
17.5-25	12	14.00/1.5	6150	350	3650	225	445	1350	25.5	TT/TL	
17.5-25	16	14.00/1.5	7300	475	4250	300	445	1350	25.5	TT/TL	
20.5-25	16	17.00/2.0	8250	350	5450	275	520	1490	28.5	TT/TL	
20.5-25	20	17.00/2.0	9500	450	6000	325	520	1490	28.5	TT/TL	
23.5-25	16	19.50/2.5	9500	300	6150	225	595	1615	31.5	TT/TL	
23.5-25	20	19.50/2.5	10900	375	7300	300	595	1615	31.5	TT/TL	
23.5-25	24	19.50/2.5	12500	475	8000	350	595	1615	31.5	TT	

Compactions



LC101

OTR Tire

Stable ride,excellent operating performance,tread base adopts low heat generating,good heat resistant compound,with excellent wear,puncture and cutting resistance.

Size	Ply Rating	Rim	10km/h		Section Width (mm)	Overall Diameter (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)			TT	TL
13/80-20	16	9.0	5430	800	325	1045	TT	



LL66A

OTR Tire

Stable ride,excellent operating performance,tread base adopts low heat generating,good heat resistant compound,with excellent wear,puncture and cutting resistance.

Size	Ply Rating	Rim	10km/h		Section Width (mm)	Overall Diameter (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)			TT	TL
7.50-16	14	6.00G	2390	700	215	810	TT	
12.00-24	16	8.5	6150	675	315	1245	TT	
12.00-24	18	8.5	6500	750	315	1245	TT	
12.00-24	20	8.5	6900	825	315	1245	TT	



LL66B

OTR Tire

Stable ride,excellent operating performance,tread base adopts low heat generating,good heat resistant compound,with excellent wear,puncture and cutting resistance.

Size	Ply Rating	Rim	10km/h		Section Width (mm)	Overall Diameter (mm)	Type	
			Max.Load (kg)	Inflated Pressure (kPa)			TT	TL
9.00-20	14	7.0	4375	725	255	1015	TT	



Forestry



LL711

Logging Tire

1. Available for logging transport of short haul.
2. Good running stability and powerful grip.
3. Powerful resistance to wear, out and attack.
4. Good traction.

Size	Ply Rating	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
								TT	TL
12.00-24	20	8.5	4495	750	315	1275	36.0	TT	



LML401

Logging Tire

1. Available for logging transport of short haul.
2. Good running stability and powerful grip.
3. Powerful resistance to wear, out and attack.
4. Good traction.

Size	Ply Rating	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
								TT	TL
11.00-20	16	8.0	3350	810	293	1131	32.0	TT	
11.00-20	18	8	3650	910	293	1131	32.0	TT	

Sand



LD701(E-7)

1. Available for gravel road.
2. Good delivery performance.
3. Low rolling resistance and good heat dissipation.
4. Lateral grip.

Size	Ply Rating	Rim	50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max. Load (kg)	Inflated Pressure (kPa)				TT	TL
18-20	14	14.00T	4625	360	455	1090	16.0	TT/TL	
20-20	16	14.00T	6000	360	505	1180	17.0	TL	
22-20	14	17.0	4125	280	555	1075	18.0	TL	



LL200

1. Available for gravel road.
2. Good delivery performance.
3. Low rolling resistance and good heat dissipation.
4. Lateral grip.

Size	Ply Rating	Rim	65km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
			Max. Load (kg)	Inflated Pressure (kPa)				TT	TL
9.00-15	8	5.50F	945	245	235	840	8.0	TT	
9.00-16	8	6.50H	985	245	245	890	8.0	TT	
14.00-20	20	10.00W	2635	345	375	1220	8.5	TT	



SPECIALTY — TIRE

Agricultural
Tire



Radial Agricultural Tire



Tractors

LR861

Radial Agricultural Tire

1. Better traction and braking performance.
2. Save work time and fuel.
3. Better running stability.
4. Suitable for modern mechanical equipment.

Size	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
420/80R46	145/142	A8/B	W13	2900	160	1840	418	47.0
420/80R46	151/148	A8/B	W13	3450	240	1840	418	47.0
480/80R42	151/151	A8/B	DW16L	3450	160	1835	479	49.0
480/80R42	158/156	A8/B	DW16L	4000	240	1835	479	49.0
480/80R46	158/158	A8/B	DW16L	4250	240	1936	479	49.0
280/85R24	115/112	A8/B	W10	1215	160	1066	262	39.0
320/85R24	122/119	A8/B	W11	1500	160	1154	319	41.0
320/85R28	124/121	A8/B	W11	1600	160	1255	319	41.0
320/85R32	126/123	A8/B	W11	1700	160	1357	319	41.0
320/85R32	142/139	A8/B	W11	2650	400	1357	319	41.0
320/85R36	128/125	A8/B	W11	1800	160	1458	319	41.0
340/85R24	125/122	A8/B	W12	1650	160	1188	343	42.0
340/85R28	127/124	A8/B	W12	1750	160	1289	343	42.0
340/85R32	142/139	A8/B	W12	2650	360	1391	343	42.0
340/85R36	132/129	A8/B	W12	2000	160	1492	343	42.0
340/85R38	133/130	A8/B	W12	2060	160	1543	343	42.0
380/85R24	131/128	A8/B	W12	1950	160	1256	380	45.0
380/85R28	133/130	A8/B	W12	2060	160	1357	380	45.0
380/85R30	135/132	A8/B	W12	2180	160	1408	380	45.0
380/85R34	137/137	A8/B	W12	2300	160	1510	380	45.0
380/85R34	147/147	A8/B	W12	3075	240	1510	380	45.0
420/85R24	137/134	A8/B	W15L	2300	160	1324	418	48.0
420/85R28	139/136	A8/B	W15L	2430	160	1425	418	48.0
420/85R30	140/137	A8/B	W15L	2500	160	1476	418	48.0
420/85R34	142/139	A8/B	W15L	2650	160	1578	418	48.0
420/85R38	144/141	A8/B	W15L	2800	160	1679	418	48.0
460/85R30	145/142	A8/B	W16L	2900	160	1544	455	51.0
460/85R34	147/144	A8/B	W16L	3075	160	1646	455	51.0
460/85R38	149/146	A8/B	W16L	3250	160	1747	455	51.0
460/85R42	150/147	A8/B	W16L	3350	160	1849	455	51.0
460/85R46	152/149	A8/B	W14L	3550	160	1943	464	51.0
460/85R46	158/155	A8/B	W14L	4250	240	1943	464	51.0
520/85R38	155/152	A8/B	DW16L	3875	160	1849	516	54.0
520/85R42	157/154	A8/B	DW16L	4125	160	1951	516	54.0
520/85R42	167/164	A8/B	DW16L	5450	240	1951	516	54.0
320/90R46(R-1)	146/143	A8/B	W10	3000	320	1744	319	37.0
320/90R46(R-1)	148/148	A8/B	W10	3150	360	1744	319	37.0
380/90R46	149/149	A8/B	W12	3250	240	1852	380	45.0
380/90R46	157/157	A8/B	W12	4125	360	1852	380	45.0
420/90R30	142/139	A8/B	DW13	2650	160	1518	418	48.0
420/90R30	147/144	A8/B	DW13	3075	240	1518	418	48.0



LR650

Radial Agricultural Tire

1. Longer service life.
2. Excellent stability and comfort.
3. More efficient traction.
4. Outstanding floating behavior reduces pressure to land.

Size	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
440/65R24	128/131	D/AB	W14L	1800	160	1182	441	45.0
440/65R28	131/134	D/AB	W14L	1950	160	1283	441	45.0
480/65R24	133/136	D/AB	W15L	2060	160	1234	479	46.0
480/65R28	136/139	D/AB	W15L	2240	160	1335	479	46.0
540/65R24	140/143	D/AB	W16L	2500	160	1312	550	48.0
540/65R28	142/145	D/AB	W16L	2650	160	1413	550	48.0
540/65R30	150/153	D/AB	W16L	3350	240	1464	550	48.0
540/65R34	145/148	D/AB	W16L	2900	160	1566	550	48.0
600/65R28	147/150	D/AB	DW20B	3075	160	1491	591	52.0
600/65R38	153/156	D/AB	DW20B	3650	160	1745	591	52.0
650/65R38	157/160	D/AB	DW20B	4125	160	1811	645	56.0
650/65R42	165/168	D/AB	DW20B	5150	240	1913	645	56.0
710/70R38	166/169	D/AB	DW23B	5300	160	1959	716	57.0
710/70R42	168/171	D/AB	DW23B	5600	160	2061	716	57.0
710/70R42	173/176	D/AB	DW23B	6500	240	2061	716	57.0



LR700

Radial Agricultural Tire

1. Saving time and fuel.
2. Better self-cleaning capability.
3. Comfort on the road and in the field.

Size	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
360/70R24	122/119	A8/B	W11	1500	160	1152	357	42.0
360/70R24	127/124	A8/B	W11	1750	240	1152	357	42.0
380/70R24	125/125	A8/B	W12	1650	160	1190	360	43.0
420/70R24	130/127	A8/B	W13	1900	160	1248	418	44.0
420/70R24	136/133	A8/B	W13	2240	240	1248	418	44.0
420/70R26	133/130	A8/B	W13	2060	160	1349	418	44.0
420/70R26	139/136	A8/B	W13	2430	240	1349	418	44.0
480/70R24	138/135	A8/B	W15L	2360	160	1316	479	47.0
480/70R26	140/137	A8/B	W15L	2500	160	1421	479	47.0
480/70R26	145/142	A8/B	W15L	2900	240	1421	479	47.0
480/70R26	151/148	A8/B	W15L	3450	320	1421	479	47.0
480/70R34	143/143	A8/B	W15L	2725	160	1580	479	47.0
480/70R38	145/142	A8/B	W15L	2900	160	1681	479	47.0
520/70R36	150/150	A8/B	W16L	3350	160	1749	516	48.0
580/70R36	155/155	A8/B	W16L	3875	160	1827	577	50.0
580/70R36	170/167	A8/B	W16L	6000	280	1827	577	50.0



LR7000

New

Harvesters

Radial Agricultural Tire

1. Up to 10% load
2. Enhance bead strength
3. Longer service life.
4. Excellent stability and comfort.
5. More efficient traction.
6. Outstanding floating behavior reduces pressure to land.

Size	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
600/70R26	157	D	DW20B	4125	240	1551	591	52.5
600/70R26	161/161	A8/B	DW20B	4625	280	1551	591	52.5
600/70R30	152	D	DW20B	3550	160	1602	591	52.5
600/70R30	158	D	DW20B	4250	240	1602	591	52.5



LR8000

Radial Agricultural Tire

1. Longer service life.
2. Excellent stability and comfort.
3. More efficient traction.
4. Outstanding floating behavior reduces pressure to land.

Size	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
800/65R32	167	D	DW27B	5450	160	1853	798	58.0
800/65R32	172	D	DW27B	6300	240	1853	798	58.0
800/65R32	178	D	DW27B	7500	320	1853	798	58.0
800/65R32	181/181	A8/B	DW27B	8250	360	1853	798	58.0



LR9000 New —

Sparyers

Radial Agricultural Tire

1. Radial Agricultural Tire
2. better soil protection.
3. Exceptional load capacity.

Size	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
390/90R50	151/151	A8/B	W12	3450	240	1954	380	48.0
390/90R50	160/157	A8/B	W12	4500	400	1954	380	48.0





LR861

Radial Agricultural Tire

1. Better traction and braking performance.
2. Save work time and fuel.
3. Better running stability.
4. Suitable for modern mechanical equipment.

Size	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
320/90R46(R-1)	146/143	A8/B	W10	3000	320	1744	319	37.0
320/90R46(R-1)	148/148	A8/B	W10	3150	360	1744	319	37.0
340/85R38	133/130	A8/B	W11	2060	160	1543	343	42.0
380/90R46	149/149	A8/B	W12	3250	240	1852	380	45.0
380/90R46	157/157	A8/B	W12	4125	360	1852	380	45.0



D990

Radial Agricultural Tire

1. STEEL BELTED
2. Wear and puncture resistance.
3. Good grip and self-cleaning performance.

Industrial Tractors

Size	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
425/95R20	175	B	11.25-20	8900	650	1320	438	20.5



LR451

Radial Agricultural Tire

1. Increase traction performance.
2. Enhance shoulder wear and cut resistance performance.
3. Enhance tread wear resistance performance.

Compact line

Size	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
460/70R24 IND	152/152	A8/B	DW14L	3550	320	1254	455	32.0
460/70R24 IND	159/159	A8/B	DW14L	4375	400	1254	455	32.0



Bias Agricultural Tire

—



Tractor Steering Wheel



LBF201

Agricultural Tire

- 1.Lateral grip and wear resistance.
- 2.Good traction performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
5.50-16	6	---	A6	4.00E	525	370	150	710	15.0	TT	



LL30

Agricultural Tire

- 1.Lateral grip and wear resistance.
- 2.Good traction performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
4.00-12	6	---	A6	3.00D	240	360	110	535	10.0	TT	
4.00-14	4	---	A6	3.00D	270	340	110	590	10.0	TT	
4.00-14	6	---	A6	3.00D	350	400	110	590	10.0	TT	
4.00-16	6	---	A6	3.00D	800	400	110	640	10.0	TT	
4.50-14	8	---	A6	3.00D	1000	450	120	602	10.0	TT	
4.50-16	6	---	A6	3.00D	615	380	122	655	10.0	TT	
4.50-16	8	---	A6	3.00D	1000	450	122	655	10.0	TT	
5.00-14	8	---	A6	3.00D	500	450	130	620	12.0	TT	
5.00-15	8	---	A6	4.00E	675	450	130	640	10.0	TT	
6.00-16	6	---	A6	4.50E	495	250	165	745	13.0	TT	
6.50-20	8	---	A6	5.00F	865	420	180	860	16.0	TT	

Tractor Drive Wheel



LL31

Agricultural Tire

1. Wear and puncture resistance.
2. Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
5.00-12	4	---	A6	4.00E	280	200	145	590	22.0		TT
5.50-17	6	---	A6	4.00E	440	250	145	750	22.0		TT
6.00-12	4	---	A6	4.50E	335	180	165	640	22.0		TT
6.00-12	6	---	A6	4.50E	405	250	165	640	22.0		TT
6.00-12	8	---	A6	4.50E	420	260	165	640	22.0		TT
6.00-14	6	---	A6	4.50E	450	250	165	690	20.5		TT
6.00-14	8	---	A6	4.50E	685	420	165	690	20.5		TT
6.00-16	6	---	A6	4.50E	495	250	165	745	22.0		TT
7.50-16	6	---	A6	5.50F	650	210	205	810	23.0		TT
7.50-16	8	---	A6	5.50F	700	240	205	810	23.0		TT
7.50-20	6	---	A6	5.50F	760	210	205	910	24.0		TT
7.50-20	8	---	A6	5.50F	880	280	205	910	24.0		TT
8.3-24	6	---	A6	W7	810	240	210	995	30.0		TT
8.3-24	8	---	A6	W7	920	280	210	995	30.0		TT
8.5-20	8	---	A6	W7	880	250	210	895	30.0		TT
9.5-20	8	---	A6	W8	955	280	240	950	30.0		TT
9.5-24	6	---	A6	W8	940	210	240	1050	30.0		TT
9.5-24	8	---	A6	W8	1110	280	240	1050	30.0		TT
10-15	8	---	A6	9.00	950	310	254	775	20.0		TT
11.2-24	6	---	A6	W10	950	180	285	1105	35.0		TT
11.2-24	8	---	A6	W10	1150	250	285	1105	35.0		TT
12-38	8	---	A6	DW11	1570	140	330	1575	35.0		TT
12.4/11-28	6	---	A6	W11	1275	170	315	1280	38.0		TT
12.4/11-28	8	---	A6	W11	1510	230	315	1280	38.0		TT
14.9-24	6	---	A6	W13	1510	140	378	1285	38.0		TT
14.9-24	8	---	A6	W13	1760	180	378	1285	38.0		TT
14.9-28	6	---	A6	W13	1610	140	378	1385	38.0		TT
14.9-28	8	---	A6	W13	1880	180	378	1385	38.0		TT
16.9-34	8	---	A6	W15L	2380	170	430	1585	37.0		TT
16.9-34	10	---	A6	W15L	2605	200	430	1585	37.0		TT



LL32

Agricultural Tire

1. Wear and puncture resistance.
2. Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
5.50-16	10	---	A6	4.00E	1325	530	150	715	16.0	TT	
6.00-16	6	---	A6	4.50E	495	250	170	730	18.0	TT	
6.00-16	10	---	A6	4.50E	755	420	170	730	18.0	TT	
6.50-16	10	---	A6	5.00F	635	300	180	765	18.0	TT	
6.50-16	14	---	A6	5.00F	815	480	180	765	18.0	TT	
7.00-16	14	---	A6	5.50F	1010	460	190	785	18.0	TT	
7.50-16	10	---	A6	5.50F	800	320	205	810	20.0	TT	
7.50-16	14	---	A6	5.50F	1030	460	205	810	20.0	TT	



LL46

Agricultural Tire

1. Wear and puncture resistance.
2. Good grip and traction performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
15-24	10	---	A6	DW14	2800	280	410	1330	33.0	TT	
16.9-28	8	---	A6	W15L	2175	170	430	1435	39.0	TT	
16.9-30	8	---	A6	W15L	2245	170	430	1485	39.0	TT	
16.9-30	10	---	A6	W15L	2455	200	430	1485	39.0	TT	



LL76

Agricultural Tire

1. Wear and puncture resistance.
2. Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
23.1-26-12PR	12	---	---	DW20	3610	170	587	1606	42	TT	



Tractor Driving Wheel Paddy Field

R-2

Agricultural Tire

1. Wear and puncture resistance.
2. Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
19.5L-24	10	---	A6	17.00	2800	170	495	1382	92.0	TT	
28L-26	14	---	A6	DW25	4245	170	715	1672	100.0	TT	
23.1-26	12	---	A6	DW20	3610	170	587	1662	100.0	TT	



PR-1

Agricultural Tire

Special for paddy field.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
6.50-16	6	-	-	5.00F	565	250	165	830	60	TT	
7.50-16	8	-	-	5.50F	700	240	195	890	70	TT	
8.3-20	8	-	-	W7	760	280	210	950	75	TT	
8.3-24	8	-	-	W7	1275	330	210	1050	75	TT	
9.5-24	8	-	-	W8	1510	280	240	1150	80	TT	
11.2-24	8	-	-	W10	1700	270	285	1205	85	TT	
11/12.4-28	10	-	-	W11	2050	230	315	1293	90	TT	
14.9-30	10	-	-	W13	2190	230	378	1415	90	TT	
11-32	8	-	-	W10	1260	210	305	1460	85	TT	
16.9-34	10	-	-	W15L	2605	200	430	1585	90	TT	

Implement



LL2

Agricultural Tire

- 1.Wear and crack resistance.
- 2.Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
4.00-8	4	---	A6	3.00D	180	340	110	425	6.5	TT	
4.00-8	6	---	A6	3.00D	410	420	110	425	6.5	TT	
4.00-8	8	---	A6	3.00D	700	530	110	425	6.5	TT	
4.00-12	6	---	A6	3.00D	240	360	112	535	7.5	TT	
4.00-14	6	---	A6	3.00D	350	400	112	590	8.0	TT	
7.00-16	10	---	A6	5.50F	1100	530	200	775	12.0	TT	
7.00-16	12	---	A6	5.50F	1220	630	200	775	12.0	TT	
7.00-16	14	---	A6	5.50F	1320	730	200	775	12.0	TT	



LL11

Agricultural Tire

- 1.Low rolling resistance.
- 2.Good wear and crack resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
6.50-16	10	---	A6	5.50F	975	530	185	750	10.0	TT	
6.50-16	12	---	A6	5.50F	1060	630	185	750	10.0	TT	
7.00-16	10	---	A6	5.50F	1100	530	200	775	12.0	TT	
7.00-16	12	---	A6	5.50F	1220	630	200	775	12.0	TT	
7.00-16	14	---	A6	5.50F	1320	730	200	775	12.0	TT	



LL15

Agricultural Tire

1. Wear and crack resistance.
2. Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
4.00-16	6	---	A6	3.00D	800	400	110	640	8.0	TT	
6.00-16	6	---	A6	4.50E	635	320	170	730	9.0	TT	
6.00-16	8	---	A6	4.50E	735	420	170	730	9.0	TT	
6.00-16	10	---	A6	4.50E	860	530	170	730	9.0	TT	
6.50-16	10	---	A6	5.50F	975	530	185	750	10.0	TT	
6.50-16	12	---	A6	5.50F	1080	630	185	750	10.0	TT	
7.50-16	14	---	A6	6.00G	1500	730	215	805	13.0	TT	



LL19

Agricultural Tire

1. Low noise.
2. Fuel saving.
3. Good wear resistance.
4. Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
5.50-14	8	---	A6	3.00D	595	390	158	635	9.0	TT	



LL27

Agricultural Tire

Multiple functions.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
4.50-14	8	---	A6	3.00D	1000	450	120	602	8.0	TT	
5.50-16	8	---	A6	4.00E	1100	470	150	685	8.0	TT	
5.50-16	10	---	A6	4.00E	1325	530	150	685	8.0	TT	



LL29

Agricultural Tire

Multiple functions.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
4.50-16	6	---	A6	3.00D	615	360	122	655	8.0	TT	
4.50-16	8	---	A6	3.00D	1000	450	122	655	8.0	TT	
4.50-16	10	---	A6	3.00D	1325	530	122	655	8.0	TT	
5.00-14	8	---	A6	3.00D	1200	530	130	628	8.0	TT	



LL38

Agricultural Tire

1. Wear and puncture resistance.
2. Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
4.50-16	6	---	A6	3.00D	615	360	122	655	8.0	TT	
4.50-16	8	---	A6	3.00D	1000	450	122	655	8.0	TT	
4.50-16	10	---	A6	3.00D	1325	530	122	655	8.0	TT	
5.00-16	8	---	A6	4.00E	1200	600	135	680	8.0	TT	
5.00-16	10	---	A6	4.00E	1360	650	135	680	8.0	TT	
5.50-16	8	---	A6	4.00E	1100	470	150	685	8.0	TT	
5.50-16	10	---	A6	4.00E	1325	530	150	685	8.0	TT	



LL40

Agricultural Tire

1. Wear and puncture resistance.
2. Good traction.

**Implement
Steering/Support**

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
10-15	8	---	A6	9.00	1240	300	272	752	10.0	TT	



**Implement
Flotation/Traction**

LBI301

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
600/50-22.5	16	169	A6	AG20.00	5770	260	611	1172	25		TL



Industry Tractor

LBR401

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
8.25-16	12	---	A6	8.50H	D1360 S1550	530	235	855	22.0		TT



LL101

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
										TT	TL
16.9-28	12	---	A6	W15L	3450	260	429	1410	28.0		TL
19.5L-24	12	---	A6	DW16	3450	230	495	1340	30.0		TL



SPECIALTY — TIRE

Industrial
Tire

Industrial



LF401

Industrial Tire

1. Wear resistance compound, High wear resistance performance. Increase tyre life.
2. Deep pattern design and wide tread arc, Enhance self-cleaning performance.
3. Variational pattern design, Novel appearance.
4. New stamping design.

Size	Ply Rating	Standard Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
								TT	TL
18X7-8NHS	16	4.33R	1695	1000	173	465	18.0	TT	
5.00-8NHS	10	3.50D	1150	1000	137	470	15.0	TT	
6.00-9NHS	10	4.00E	1505	860	160	540	15.0	TT	
6.50-10NHS	10	5.00F	1655	790	175	590	16.0	TT	
7.00-12NHS	12	5.00S	2375	860	190	676	21.0	TT	
28X9-15NHS (8.15-15)*	14	7.0	3050	970	220	710	18.0	TT	
8.25-15NHS	14	6.5	3775	830	235	840	23.0	TT	
250-15NHS	18	7.5	4110	1030	250	735	23.5	TT	
300-15NHS	18	8.0	5530	830	300	840	23.5	TT	
7.50-16NHS	12	6.00G	3195	790	215	805	22.0	TT	
9.00-20NHS	16	7.0	5195	760	259	1018	25.0	TT	



LL39

Industrial Tire

1. Good wear and crack resistance.
2. Lateral grip.

Size	Ply Rating	Standard Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
								TT	TL
6.50-10NHS	10	5.00F	1655	790	175	590	15.0	TT	
6.50-10NHS	14	5.00F	1975	1070	175	590	15.0	TT	
7.00-15NHS	12	5.50S	2900	850	194	735	20.0	TT	
8.15-15NHS	12	7.0	3230	840	215	704	18.0	TT	
18x7-8NHS	16	4.33R	1640	1000	173	465	16.0	TT	
28x9-15NHS	12	7.0	3035	700	220	710	13.0	TT	
28x9-15NHS	14	7.0	3050	970	220	710	13.0	TT	



LL45

Industrial Tire

1. Good wear and side slip resistance.
2. Stable performance.

Size	Ply Rating	Standard Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
								TT	TL
5.00-8NHS	6	3.50D	850	600	137	470	12.0	TT	
5.00-8NHS	10	3.50D	1150	1000	137	470	12.0	TT	
6.00-9NHS	10	4.00E	1505	860	160	540	10.0	TT	
6.50-10NHS	10	5.00F	1655	790	175	590	15.0	TT	
7.00-9NHS	10	5.00S	1995	860	190	590	12.0	TT	
7.00-12NHS	12	5.00S	2375	860	190	676	12.0	TT	
7.50-15NHS	14	6.0	3375	925	215	780	18.0	TT	
8.25-12NHS	12	6.5	3060	720	235	765	12.0	TT	
8.25-15NHS	14	6.5	3775	830	235	840	15.0	TT	
8.25-15NHS	18	6.5	4240	1000	235	840	15.0	TT	
9.00-16NHS	14	6.50H	4495	760	255	890	16.0	TT	



LL65

Industrial Tire

1. Wear and crack resistance.
2. Lateral grip.

Size	Ply Rating	Standard Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
								TT	TL
10.00-15NHS	14	7.5	2800	750	280	935	12.0	TT	



LL102

Industrial Tire

1. Wear and crack resistance.
2. Low rolling resistance.
3. Good heat dissipation.

Size	Ply Rating	Standard Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
								TT	TL
10-16.5NHS	10	8.25	2135	520	264	773	13.0	TL	
10-16.5NHS	12	8.25	2375	620	264	773	13.0	TL	
12-16.5NHS	12	9.75	2985	550	307	831	13.0	TL	



LL103

Industrial Tire

1. Wear and crack resistance.
2. Low rolling resistance.
3. Good heat dissipation.

Size	Ply Rating	Standard Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type	
								TT	TL
12-16.5LT	10	9.75	D1418 S1614	420	307	831	13.0	TL	
12-16.5LT	12	9.75	D1650 S1850	520	307	831	13.0	TL	


Solid


LS601

Solid Tire For Fork Lifts

- 1.High traction
- 2.Excellent stability
- 3.Smooth running
- 4.Wear&cut resistant tread compound
- 5.Reinforced bead for secure mounting
- 6.Three compound and nylon reinforced construction

Size	Rim	Overall Diameter (mm)±3%	Section Width (mm)	Tread Depth (mm)	Max.Load (kg)						
					Balance Forklift						Other Industrial Vehicles
					10km/h		16km/h		25km/h		
					Load Wheel	Steer Wheel	Load Wheel	Steer Wheel	Load Wheel	Steer Wheel	
5.00-8	3.00D	457	114	21	1255	965	1145	880	1060	815	980
6.00-9	4.00E	528	140	24	1975	1520	1805	1390	1675	1290	1520
6.50-10	5.00F	580	156	22	2715	2090	2485	1910	2310	1775	2090
7.00-12	5.00S	663	168	25	3105	2390	2835	2180	2635	2025	2095
7.00-15	5.5	759	204	30	3700	2845	3375	2595	3135	2410	2845
8.25-15	6.5	817	205	32	5085	3910	4640	3570	4310	3315	3910
18X7-8	4.33R	457	145	20	2430	1870	2215	1705	2060	1585	1870
28X9-15 (8.15-15)	7.0	706	215	27	4060	3125	3710	2855	3445	2650	3125



LS602

Solid Tire For Fork Lifts

- 1.Excellent stability
- 2.Smooth running
- 3.Wear&cut resistant tread compound
- 4.Reinforced bead for secure mounting

Size	Rim	Overall Diameter (mm)±3%	Section Width (mm)	Tread Depth (mm)	Max.Load (kg)						
					Balance Forklift						Other Industrial Vehicles
					10km/h		16km/h		25km/h		
					Load Wheel	Steer Wheel	Load Wheel	Steer Wheel	Load Wheel	Steer Wheel	
4.00-8	3.00D	412	116	5	1090	840	995	765	925	710	840
4.00-8	3.75A	412	116	5	1175	905	1080	830	1000	770	910



LS603

Solid Tire For Fork Lifts

1. High traction
2. Excellent stability
3. Smooth running
4. Wear&cut resistant tread compound
5. Reinforced bead for secure mounting
6. Three compound and nylon reinforced construction

Size	Rim	Overall Diameter (mm)±3%	Section Width (mm)	Tread Depth (mm)	Max.Load (kg)							
					Balance Forklift						Other Industrial Vehicles	
					10km/h		15km/h		25km/h		10km/h	
					Load Wheel	Steer Wheel	Load Wheel	Steer Wheel	Load Wheel	Steer Wheel		
16X8-8	4.33R	410	146	18	1545	1190	1410	1085	1305	1005	1185	
23X9-10	6.50F	588	206	24	3730	2870	3405	2620	3160	2430	2865	
250-15	7.0	713	226	25	5220	4015	4770	3670	4425	3405	4015	
300-15	8.0	813	258	30	6895	5305	6300	4845	5850	4500	5310	



LS604

Solid Tire For Fork Lifts

1. High traction
2. Excellent stability
3. Smooth running
4. Wear&cut resistant tread compound
5. Reinforced bead for secure mounting
6. Three compound and nylon reinforced construction

Size	Rim	Overall Diameter (mm)±3%	Section Width (mm)	Tread Depth (mm)	Max.Load (kg)							
					Balance Forklift						Other Industrial Vehicles	
					10km/h		15km/h		25km/h		10km/h	
					Load Wheel	Steer Wheel	Load Wheel	Steer Wheel	Load Wheel	Steer Wheel		
200/50-10	6.50F	456	196	15	2910	2240	2665	2050	2470	1900	2240	
23X10-12	8.00G	588	232	20	4450	3425	4060	3125	3770	2900	3420	



LS605

Solid Tire For Fork Lifts

1. High traction
2. Excellent stability
3. Smooth running
4. Wear&cut resistant tread compound
5. Reinforced bead for secure mounting
6. Three compound and nylon reinforced construction

Size	Rim	Overall Diameter (mm)±3%	Section Width (mm)	Tread Depth (mm)	Max.Load (kg)						
					Balance Forklift						Other Industrial Vehicles
					10km/h		16km/h		25km/h		
					Load Wheel	Steer Wheel	Load Wheel	Steer Wheel	Load Wheel	Steer Wheel	10km/h
18x7-8	4.33R	456	162	25	2430	1870	2215	1705	2060	1585	1870
21x8-9	6.00E	535	202	30	2890	2225	2645	2035	2455	1890	2230
6.50-10	5.00F	597	178	30	2715	2090	2485	1910	2310	1775	2090
28X9-15 (8.15-15)	7.0	706	225	34	4060	3125	3710	2855	3445	2650	3125
8.25-15	6.5	847	236	38	5085	3910	4640	3570	4310	3315	3910
15X4 1/2-8	3.00D	390	114	17	930	750	910	680	850	640	650



LS605(RV)

Solid Tire For Fork Lifts

1. High traction
2. Excellent stability
3. The tire with damping hole, vehicle ride comfort is higher and can reduce the tire heat prolonging the service life of tires
4. Wear&cut resistant tread compound
5. Reinforced bead for secure mounting
6. Three compound and nylon reinforced construction

Size	Rim	Overall Diameter (mm)±3%	Section Width (mm)	Tread Depth (mm)	Max.Load (kg)						
					Balance Forklift						Other Industrial Vehicles
					10km/h		16km/h		25km/h		
					Load Wheel	Steer Wheel	Load Wheel	Steer Wheel	Load Wheel	Steer Wheel	10km/h
8.25-15	6.5	847	236	38	5085	3910	4640	3570	4310	3315	3910
28X9-15 (8.15-15)	7.0	706	225	34	4060	3125	3710	2855	3445	2650	3125



NO n -marking solid tyres

Solid Tire For Fork Lifts

- 1.Chunk Resistant Non-Marking
- 2.Excellent stability
- 3.Smooth running
- 4.Wear&cut resistant tread compound
- 5.Reinforced bead for secure mounting
- 6.Three compound and nylon reinforced construction

Size	Pattern	Rim	Overall Diameter (mm)±3%	Section Width (mm)	Tread Depth (mm)	Max.Load (kg)						Other Industrial Vehicles
						Balance Forklift						
						10km/h		16km/h		23km/h		
						Load Wheel	Steer Wheel	Load Wheel	Steer Wheel	Load Wheel	Steer Wheel	
4.00-8	LS602	3.00D	412	116	5	1090	840	995	765	925	710	840
4.00-8	LS602	3.75A	412	116	5	1175	905	1080	830	1000	770	910
5.00-8	LS601	3.00D	457	114	21	1255	965	1145	890	1080	815	960
6.00-9	LS601	4.00E	528	140	24	1975	1520	1905	1390	1675	1290	1520
6.50-10	LS601	5.00F	580	156	22	2715	2090	2485	1910	2310	1775	2090
7.00-12	LS601	5.00S	663	168	25	3105	2390	2835	2180	2635	2025	2095
7.00-15	LS601	5.5	759	204	30	3700	2845	3375	2595	3135	2410	2845
8.25-15	LS601	6.5	817	205	32	5085	3910	4640	3570	4310	3315	3910
16X6-8	LS603	4.33R	410	146	18	1545	1190	1410	1085	1305	1005	1185
18X7-8	LS601	4.33R	457	145	20	2430	1870	2215	1705	2060	1585	1870
23X9-10	LS603	6.50F	598	206	24	3730	2870	3405	2620	3160	2430	2985
23X10-12	LS604	8.00G	598	232	20	4450	3425	4060	3125	3770	2900	3420
28X9-15 (8.15-15)	LS601	7.0	706	215	27	4060	3125	3710	2855	3445	2650	3125
200/50-10	LS604	6.50F	456	196	15	2910	2240	2665	2050	2470	1900	2240
250-15	LS603	7.0	713	226	25	5220	4015	4770	3670	4425	3405	4015
300-15	LS603	8.0	813	258	30	6895	5305	6300	4845	5850	4500	5310
18x7-8	LS605	4.33R	456	162	25	2430	1870	2215	1705	2060	1585	1870
21x8-9	LS605	6.00E	535	202	30	2890	2225	2645	2035	2455	1890	2230
6.50-10	LS605	5.00F	597	178	30	2715	2090	2485	1910	2310	1775	2090
28X9-15 (8.15-15)	LS605	7.0	706	225	34	4060	3125	3710	2855	3445	2650	3125
15X4 1/2-8	LS605	3.00D	380	114	17	930	750	910	680	850	640	650



Clip solid tyres

Solid Tire For Fork Lifts

- 1.Low rolling resistance, traction is strong
- 2.Excellent stability
- 3.Abrasion resistant cutting performance
- 4.Simple type bead design, safety light rim assembly
- 5.Three compound and nylon reinforced construction

Size	Pattern	Rim	Overall Diameter (mm) ±2%	Section Width (mm)	Tread Depth (mm)	Max.Load (kg)						
						Balance Forklift						Other Industrial Vehicles
						10km/h		15km/h		25km/h		
						Load Wheel	Steer Wheel	Load Wheel	Steer Wheel	Load Wheel	Steer Wheel	
5.00-8	LS601	3.00D	457	114	21	1255	965	1145	890	1060	815	960
6.00-9	LS601	4.00E	528	140	24	1975	1520	1805	1390	1675	1290	1520
18X7-8	LS601	4.33R	457	145	20	2430	1870	2215	1705	2060	1585	1870
6.50-10	LS601	5.00F	580	156	22	2715	2090	2485	1910	2310	1775	2090
7.00-12	LS601	5.00S	663	168	25	3105	2390	2835	2180	2635	2025	2095
26X9-15 (8.15-15)	LS601	7.0	706	215	27	4060	3125	3710	2855	3445	2650	3125
16X6-8	LS603	4.33R	410	146	18	1545	1190	1410	1085	1305	1005	1185
23X9-10	LS603	6.50F	588	206	24	3730	2870	3405	2620	3160	2430	2865
200/50-10	LS604	6.50F	456	196	15	2910	2240	2665	2050	2470	1900	2240
23X10-12	LS604	8.00G	588	232	20	4450	3425	4060	3125	3770	2900	3420
18x7-8	LS605	4.33R	457	162	25	2430	1870	2215	1705	2060	1585	1870
21x8-9	LS605	6.00E	535	202	30	2890	2225	2645	2035	2455	1890	2230
6.50-10	LS605	5.00F	597	178	30	2715	2090	2485	1910	2310	1775	2090
15X4 1/2-8	LS605	3.00D	380	114	17	930	750	910	680	850	640	650



A nighttime photograph of a street with light trails from moving vehicles. The scene is dark, with a bright light source at the top center creating a lens flare. The street is illuminated by several streetlights, and the foreground shows a paved sidewalk and road surface. The light trails are horizontal and stretch across the width of the road, with yellow and white trails in the foreground and red trails in the background.

SPECIALTY — TIRE

Bias Tire

Passenger Car



LL19

Bias Passenger Car Tire

1. Wear and crack resistance.
2. Low rolling resistance.
3. Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
5.60-13	4	70	K	4J	330	170	145	600	6.0
5.80-13	6	74	K	4J	370	210	145	600	6.0



LL117

Temporary-use Spare Tire

1. Low rolling resistance.
2. Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
T155/90D16	---	110	M	4T	1080	420	152	686	3.8

Mini Truck



LL20

Bias Mini Truck Tire

1. Low rolling resistance.
2. Good wear and crack resistance.
3. Good heat dissipation.
4. Low noise.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
5.00-10ULT	8	79/77	K	3.50B	D412 S437	400	143	517	8.0
5.00-12ULT	6	78/76	K	3.50B	D400 S425	300	143	568	8.0
5.00-12ULT	8	83/81	K	3.50B	D462 S487	400	143	568	8.0
5.00-12ULT	10	88/86	K	3.50B	D530 S560	500	143	568	8.0



LL21

Bias Mini Truck Tire

1. Good wear and crack resistance.
2. Low rolling resistance.
3. Good heat dissipation.
4. Low noise.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
4.50-12ULT	8	77/76	K	3.00B	D400 S412	400	127	545	7.0



Light Truck

LL9
Bias Light Truck Tire

- 1. Low noise.
- 2. Low rolling resistance.
- 3. Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
6.00-15LT	8	97/92	K	4.50E	D630 S730	420	170	705	9.0
6.00-15LT	10	101/97	K/L	4.50E	D730 S825	530	170	705	9.0
6.50-15LT	8	101/97	K/L	4.50E	D730 S825	420	180	730	9.0
6.50-15LT	10	106/101	K/L	4.50E	D825 S950	530	180	730	9.0
7.50-15LT	10	115/110	K	6.00G	D1060 S1215	530	215	780	11.0
7.50-15LT	12	119/115	K/L	6.00G	D1215 S1380	630	215	780	11.0
7.50-16LT	10	116/112	K/L	6.00G	D1120 S1250	530	215	805	11.5
7.50-16LT	12	120/116	K/L	6.00G	D1250 S1400	630	215	805	11.5
7.50-16LT	14	122/118	K/L	6.00G	D1320 S1500	730	215	805	11.5
7.50-16LT	16	126/123	K	6.00G	D1520 S1700	850	215	805	11.5



LL11

Bias Light Truck Tire

1. Low noise and fuel saving.
2. Good wear resistance and heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
6.50-16LT	B	102/98	K	5.50F	D750 S850	420	185	750	10.0
6.50-16LT	10	107/103	K/L	5.50F	D875 S975	530	185	750	10.0
6.50-16LT	12	110/105	K/L	5.50F	D925 S1060	630	185	750	10.0
7.00-15LT	10	109/105	K/L	5.50F	D925 S1030	530	200	750	10.0
7.00-15LT	12	113/109	K	5.50F	D1030 S1150	630	200	750	10.0
7.00-16LT	B	107/102	K	5.50F	D850 S975	420	200	775	12.0
7.00-16LT	10	111/106	K	5.50F	D950 S1090	530	200	775	12.0
7.00-16LT	12	115/110	K/L	5.50F	D1060 S1215	630	200	775	12.0
7.00-16LT	14	119/114	K	5.50F	D1180 S1320	730	200	775	12.0



LL15

Bias Light Truck Tire

Good wear and crack resistance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
6.00-13LT	6	88/83	K	4.50B	D487 S580	320	170	655	9.0
6.00-13LT	8	93/89	K	4.50B	D580 S650	420	170	655	9.0
6.00-14LT	8	95/90	K	4 1/2J	D600 S690	420	170	680	9.0
6.00-14LT	10	99/95	K	4 1/2J	D710 S800	530	170	680	9.0
6.00-15LT	8	97/92	K	4.50E	D630 S730	420	170	705	9.0
6.00-15LT	10	101/97	K	4.50E	D730 S825	530	170	705	9.0
6.50-14LT	8	99/95	K	4 1/2J	D690 S775	420	180	705	9.0
6.50-14LT	10	104/100	K	4 1/2J	D800 S900	530	180	705	9.0
6.50-15LT	8	101/97	K	4.50E	D730 S825	420	180	730	9.0
6.50-15LT	10	106/101	K/L	4.50E	D825 S950	530	180	730	9.0
6.50-16LT	10	107/103	K/L	5.50F	D875 S975	530	185	750	10.0
6.50-16LT	12	110/105	K	5.50F	D925 S1060	630	185	750	10.0
7.50-16LT	10	116/112	K/L	6.00G	D1120 S1250	530	215	805	13.0
7.50-16LT	12	120/116	K	6.00G	D1250 S1400	630	215	805	13.0
7.50-16LT	14	122/118	K	6.00G	D1320 S1500	730	215	805	13.0
7.50-16LT	16	126/123	K	6.00G	D1520 S1700	850	215	805	13.0
8.25-16LT	14	126/122	K	6.50H	D1500 S1700	630	235	855	14.5
8.25-16LT	16	128/124	K	6.50H	D1600 S1800	730	235	855	14.5



LL16

Bias Light Truck Tire

1. Good wear and crack resistance.
2. Low rolling resistance.
3. Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
6.50-14LT	8	99/95	K/L	4 1/2J	D690 S775	420	180	750	9.0
6.50-14LT	10	104/100	K/L	4 1/2J	D800 S900	530	180	750	9.0



LL17

Bias Light Truck Tire

1. Good wear and crack resistance.
2. Low rolling resistance.
3. Good heat dissipation.
4. Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
6.00-14LT	8	95/90	K	4 1/2J	D600 S690	420	170	680	9.0
6.00-14LT	10	100/96	K	4 1/2J	D710 S800	530	170	680	9.0



LL18

Bias Light Truck Tire

1. Good wear and crack resistance.
2. Fuel saving.
3. Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
6.00-13LT	6	88/83	K	4.50B	D487 S560	320	170	655	9.0
6.00-13LT	8	93/89	K	4.50B	D580 S650	420	170	655	9.0



LL62

Bias Light Truck Tire

1. Wear and crack resistance.
2. Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
7.50-16LT	14	122/118	K	6.00G	D1320 S1500	730	215	816	16.0
7.50-16LT	16	126/123	K	6.00G	D1520 S1700	850	215	816	16.0



LL19

Bias Light Truck Tire

1. Good wear resistance.
2. Good heat dissipation.
3. Low noise.
4. Fuel saving.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
5.50-13LT	8	88/84	K	4.00B	D500 S560	420	160	620	9.0



LL89

Bias Light Truck Tire

1. Wear and crack resistance.
2. Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
7.50-16LT	14	122/118	K	6.00G	D1320 S1500	730	215	816	15.5
7.50-16LT	16	124/120	K	6.00G	D1520 S1700	758	215	816	15.5
8.25-16LT	16	128/124	K	6.50H	D1600 S1800	730	235	867	18.5



MG-99

Bias Light Truck Tire

1. Good wear resistance.
2. Good heat dissipation.
3. Low noise.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
7.50-16LT	16	126/123	K	6.00G	D1520 S1700	850	215	816	18.0

Truck & Bus



LL1

Bias Truck/Bus Tire

1. Low rolling resistance.
2. Good Wear and crack resistance.
3. Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
12.00-24	16	156/152	G	8.5	D3550 S4000	670 740	315	1225	15.0
12.00-24	18	158/154	G	8.5	D3750 S4250	740 810	315	1225	15.0



LL2

Bias Truck/Bus Tire

1. Low rolling resistance.
2. Good Wear and crack resistance.
3. Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
7.00-16LT	10	111/106	K	5.50F	D950 S1090	530	200	775	12.0
7.00-16LT	12	115/110	K	5.50F	D1060 S1215	630	200	775	12.0
7.00-16LT	14	118/114	K	5.50F	D1180 S1320	730	200	775	12.0
9.00-20	12	138/133	G	7.0	D2060 S2360	600 670	259	1018	15.0
9.00-20	14	141/137	G/K	7.0	D2300 S2575	700 770	259	1018	15.0
9.00-20	16	145/140	G	7.0	D2500 S2900	810 880	259	1018	15.0
10.00-20	16	146/142	G	7.5	D2650 S3000	740 810	278	1055	15.0
10.00-20	18	150/145	G	7.5	D2900 S3350	840 910	278	1055	15.0
12.00-20	16	152/148	G	8.5	D3150 S3550	670 740	315	1125	15.0
12.00-20	18	154/150	G	8.5	D3350 S3750	740 810	315	1125	15.0



LL3

Bias Truck/Bus Tire

1. Wear and crack resistance.
2. Lateral grip.
3. Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
8.25-20	10	129/124	G	6.5	D1600 S1850	530 600	236	974	15.0
8.25-20	14	136/131	G	6.5	D1950 S2240	740 810	236	974	15.0



LL4

Bias Truck/Bus Tire

Good Wear and crack resistance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
9.00-20	12	138/133	G	7.0	D2080 S2360	600 670	259	1018	15.0
9.00-20	14	141/137	G/K	7.0	D2300 S2575	700 770	259	1018	15.0
9.00-20	16	145/140	G	7.0	D2500 S2900	810 880	259	1018	15.0
11.00-20	16	150/145	G	8.0	D2900 S3350	740 810	293	1085	16.0
11.00-20	18	153/148	G	8.0	D3150 S3650	840 910	293	1085	16.0



LL8

Bias Truck/Bus Tire

1. Good Wear and crack resistance.
2. High traction.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
7.00-15LT	10	109/105	K	5.50F	D925 S1030	530	200	750	10.0
7.00-15LT	12	113/109	K	5.50F	D1030 S1150	630	200	750	10.0
7.50-15LT	12	119/115	K	6.00G	D1215 S1360	630	215	780	11.0
7.00-20	10	121/117	G	5.5	D1285 S1450	560 630	200	904	12.0
7.00-20	12	124/120	G	5.5	D1400 S1600	670 740	200	904	12.0



LL48

Bias Truck/Bus Tire

1. Fuel saving.
2. Low noise.
3. Wear resistance.
4. Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
9.00-20	12	138/133	G	7.0	D2060 S2360	600 670	259	1018	13.5
9.00-20	14	141/137	G	7.0	D2300 S2575	700 770	259	1018	13.5
9.00-20	16	145/140	G	7.0	D2500 S2900	810 880	259	1018	13.5



LL47

Bias Truck/Bus Tire

1. Wear and crack resistance.
2. Low rolling resistance.
3. Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
7.00-20	10	121/117	G	5.5	D1285 S1450	560 630	200	904	12.0
7.00-20	12	124/120	G	5.5	D1400 S1600	670 740	200	904	12.0
7.00-20	14	127/123	G	5.5	D1550 S1750	770 840	200	904	12.0
8.25-20	14	136/131	G/K	6.5	D1950 S2240	740 810	236	974	14.0
8.25-16LT	14	126/122	K/L	6.50H	D1500 S1700	630	235	855	12.5
8.25-16LT	16	128/124	K/L	6.50H	D1600 S1800	730	235	855	12.5
9.00-20	14	141/137	G/K	7.0	D2300 S2575	700 770	259	1018	15.0
9.00-20	16	145/140	G	7.0	D2500 S2900	810 890	259	1018	15.0
10.00-20	16	146/142	G	7.5	D2650 S3000	740 810	278	1055	15.0
10.00-20	18	150/145	G	7.5	D2900 S3350	840 910	278	1055	15.0
11.00-20	16	150/145	G	8.0	D2900 S3350	740 810	293	1085	15.0
11.00-20	18	153/148	G	8.0	D3150 S3650	840 910	293	1085	15.0
12.00-20	16	152/148	G	8.5	D3150 S3550	670 740	315	1125	15.0
12.00-20	18	154/150	G	8.5	D3350 S3750	740 810	315	1125	15.0



LL59

Bias Truck/Bus Tire

1. Available for heavy load.
2. Good wear resistance.
3. Stable performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
7.50-16LT	14	122/118	K	6.00G	D1320 S1500	730	215	805	12.0
7.50-16LT	16	126/123	K	6.00G	D1520 S1700	850	215	805	12.0
8.25-16LT	14	126/122	K	6.50H	D1500 S1700	630	235	835	14.5
8.25-16LT	16	128/124	K	6.50H	D1600 S1800	730	235	835	14.5
9.00-20	14	141/137	G	7.0	D2300 S2575	700 770	259	1018	14.0
9.00-20	16	145/140	G	7.0	D2500 S2900	810 880	259	1018	14.0
10.00-20	16	146/142	G	7.5	D2650 S3000	740 810	278	1055	14.0
10.00-20	18	150/145	G	7.5	D2900 S3350	840 910	278	1055	14.0
11.00-20	16	150/145	G	8.0	D2900 S3350	740 810	293	1085	15.0
11.00-20	18	153/148	G	8.0	D3150 S3650	840 910	293	1085	15.0
12.00-20	16	152/148	G	8.5	D3150 S3550	670 740	315	1125	15.0
12.00-20	18	154/150	G	8.5	D3350 S3750	740 810	315	1125	15.0
12.00-20	20	156/151	G	8.5	D3450 S4000	810 880	315	1125	15.0
14.00-20	18	161/156	E	10.0	D4000 S4625	600 670	375	1240	20.0
14.00-20	20	164/159	E	10.0	D4375 S6000	700 770	375	1240	20.0



LL96-T

Bias Truck/Bus Tire

1. Low rolling resistance.
2. Good Wear and crack resistance.
3. Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
7.00-16LT	14	118/114	G	5.50F	D1180 S1320	730	200	785	20.0
7.50-16LT	14	122/118	G	6.00G	D1320 S1500	730	215	816	22.0
7.50-16LT	16	128/123	G	6.00G	D1520 S1700	850	215	816	22.0
8.25-16LT	14	126/122	G	6.50H	D1500 S1700	630	235	867	22.0
8.25-16LT	16	128/124	G	6.50H	D1600 S1800	730	235	867	22.0
8.25-20	14	136/131	C	6.5	D1950 S2240	740 810	236	992	19.0
9.00-20	16	145/140	B	7.0	D2500 S2900	810 880	259	1038	22.0
11.00-20	18	153/148	C	8.0	D3150 S3650	840 910	293	1105	27.0
12.00-20	18	154/150	C	8.5	D3350 S3750	740 810	315	1145	27.0
13.00-20	18	158/154	B	9.0	D3750 S4250	700 770	340	1200	24.0



LL147

Bias Truck/Bus Tire

1. Low rolling resistance.
2. Good Wear and crack resistance.
3. Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
10.00-20	18	150/145	G	7.5	D2900 S3350	840 910	278	1073	17.0



LL159

Bias Truck/Bus Tire

1. Available for heavy load.
2. Good wear resistance.
3. Stable performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
6.50-16LT	10	107/103	K	5.50F	D875 S975	530	185	750	10.0
7.50-16LT	12	120/116	K	6.00G	D1250 S1400	630	215	805	12.0
7.50-20	14	130/126	G	6.0	D1700 S1900	740 810	215	935	12.0
8.25-16LT	14	126/122	K	6.50H	D1500 S1700	630	235	855	13.5
8.25-20	14	136/131	G	6.5	D1950 S2240	740 810	236	974	13.5
10.00-20	16	146/142	G	7.5	D2650 S3000	740 810	278	1055	14.5
11.00-20	18	153/148	G	8.0	D3150 S3650	840 910	293	1085	15.0
12.00-20	18	154/150	G	8.5	D3350 S3750	740 810	315	1125	15.0



LL178

Bias Truck/Bus Tire

1. Available for heavy load.
2. Good wear resistance.
3. Stable performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
6.50-16LT	10	107/103	K	5.50F	D875 S975	530	185	750	10.0
7.00-16LT	12	115/110	K/L	5.50F	D1060 S1215	630	200	775	11.5
7.50-16LT	12	120/116	K	6.00G	D1250 S1400	630	215	805	11.5
7.50-20	14	130/126	G	6.0	D1700 S1900	740 810	215	935	11.5
8.25-16LT	14	126/122	K	6.50H	D1500 S1700	630	235	855	12.0
8.25-20	14	136/131	G	6.5	D1950 S2240	740 810	236	974	13.0



LL168

Bias Truck/Bus Tire

1. Available for heavy load.
2. Good wear resistance.
3. Stable performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
6.50-16LT	10	107/103	K	5.50F	D875 S975	530	185	750	10.0
7.00-16LT	12	115/110	K/L	5.50F	D1080 S1215	630	200	775	11.5
7.50-16LT	12	120/116	K	6.00G	D1250 S1400	630	215	805	11.5
7.50-20	14	130/126	G K	6.0	D1700 S1900	740 810	215	935	11.5
8.25-16LT	14	126/122	K/L	6.50H	D1500 S1700	630	235	855	12.0
8.25-16LT	16	126/124	K/L	6.50H	D1600 S1800	730	235	855	12.0
8.25-20	14	136/131	G K	6.5	D1950 S2240	740 810	238	974	14.0
9.00-20	14	141/137	G K	7.0	D2300 S2575	700 770	259	1018	14.0
9.00-20	16	145/140	G	7.0	D2500 S2900	810 880	259	1018	14.0
10.00-20	16	146/142	G	7.5	D2650 S3000	740 810	278	1055	14.0
11.00-20	16	150/145	G	8.0	D2900 S3350	740 810	293	1085	15.0
11.00-20	18	153/148	G	8.0	D3150 S3650	840 910	293	1085	15.0
12.00-20	18	154/150	G	8.5	D3350 S3750	740 810	315	1125	15.0

2020 TIRE CATALOGUE